


# Super-precision angular contact ball bearings: High-speed, E design



719 .. E (VEB) and 70 .. E (VEX) series

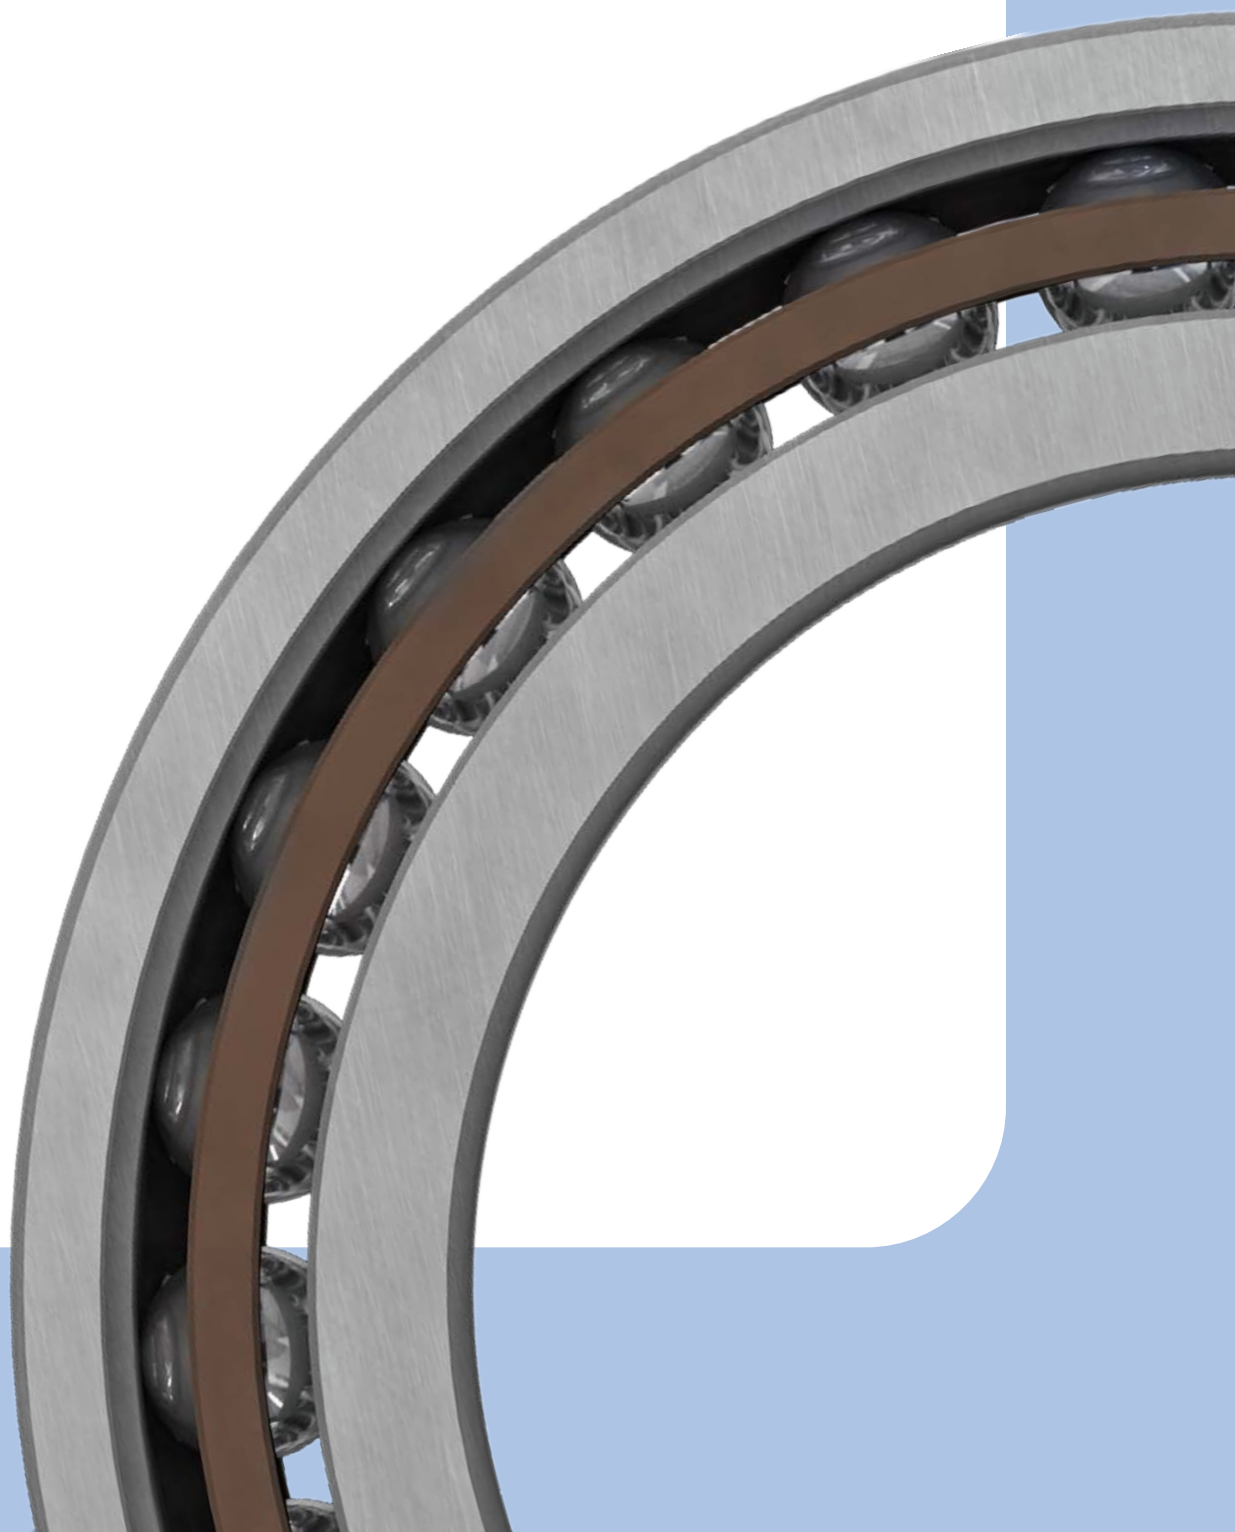

# Contents

## A Product information

**SKF super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series** . . . . . 3

**The assortment** . . . . . 4  
High-speed, E design bearings. . . . . 4  
Bearing series . . . . . 6  
Bearing variants. . . . . 6  
Single bearings and matched bearing sets . . . . . 7

**Applications** . . . . . 8

## B Recommendations

**Bearing arrangement design**. . . . . 10  
Single bearings . . . . . 10  
Bearing sets . . . . . 10  
Type of arrangement . . . . . 11  
Application examples . . . . . 12

**Lubrication** . . . . . 14  
Grease lubrication . . . . . 14  
Oil lubrication . . . . . 15

## C Product data

**Bearing data – general**. . . . . 18  
Boundary dimensions . . . . . 18  
Tolerances . . . . . 19  
Bearing preload . . . . . 19  
Bearing axial stiffness . . . . . 24  
Fitting and clamping bearing rings . . . . 26  
Load carrying capacity of bearing sets . . 27  
Equivalent bearing loads . . . . . 27  
Attainable speeds. . . . . 28  
Cage. . . . . 29  
Seals . . . . . 29  
Materials . . . . . 29  
Heat treatment. . . . . 29  
Marking of bearings and bearing sets. . 30  
Packaging. . . . . 31  
Designation system . . . . . 31

**Product tables** . . . . . 34

## D Additional information

**Setting the highest standard for precision bearings** . . . . . 46  
Super-precision angular contact ball bearings . . . . . 46  
Super-precision cylindrical roller bearings . . . . . 47  
Super-precision double direction angular contact thrust ball bearings . . . . . 47  
Super-precision angular contact thrust ball bearings for screw drives . . . . . 47

**SKF – the knowledge engineering company** . . . . . 50

# SKF super-precision angular contact ball bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series

A

Machine tools and other precision applications require superior bearing performance. Extended speed capability, a high degree of running accuracy, high system rigidity, low heat generation, as well as low noise and vibration levels are just some of the performance challenges.

To meet the ever-increasing performance requirements of high-speed precision applications, SKF has developed super-precision bearings in the 719 .. E (*VEB*)<sup>1)</sup> and 70 .. E (*VEX*) series. Compared to high-speed B design bearings, high-speed E design bearings have a higher speed capability and they can accommodate heavier loads. This desirable combination makes bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series an excellent choice for demanding applications.

The bearings are characterized by:

- very high speed capability
- high degree of stiffness
- relatively high load carrying capacity
- extended bearing service life
- low heat generation
- compact cross section

Bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series provide high reliability and superior accuracy for applications such as high-speed machining centres, milling machines, internal grinding machines, and woodworking machines.



<sup>1)</sup> Where applicable, designations in parentheses and italics refer to the corresponding SNFA equivalent.

# The assortment

The new, super-precision bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series are available in an extended range as follows:

- Open bearings in the 719 .. E (*VEB*) series accommodate shaft diameters ranging from 8 to 120 mm; sealed bearings from 20 to 120 mm.
- Open bearings in the 70 .. E (*VEX*) series accommodate shaft diameters ranging from 6 to 120 mm; sealed bearings from 10 to 120 mm.

Bearings in both series are manufactured to two tolerance classes and are available with three contact angles, two ball materials and two ring materials. Those suitable for universal matching or mounting in sets are produced to various preload classes, to meet almost all application requirements in terms of speed and rigidity. Matched bearing sets with a special preload can be supplied on request. Bearing variants for direct oil lubrication are available.

Bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series, like all angular contact ball bearings, are nearly always adjusted against a second bearing to balance the counterforces. To accommodate heavier loads and axial loads in both directions, the bearings are used in sets consisting typically of up to four bearings.

## High-speed, E design bearings

Super-precision single row angular contact ball bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series are designed for very high operational speeds.



### Features and benefits of SKF super-precision angular contact ball bearings: High-speed, E design

#### Features

- Open oscillation
- High number of relatively large balls
- P4A or PA9A tolerance classes
- Optimized chamfer design
- ISO 19 and ISO 10 dimension series
- Optimized phenolic resin cage
- High-nitrogen stainless steel rings (NitroMax variant)
- Non-contact seals (sealed variant)
- Ready-to-mount (sealed variant)
- Relubrication-free (sealed variant)
- Lubrication features (direct oil lubrication variants)
- Asymmetrical inner and outer rings

#### Benefits

- Very high speed capability
- Relatively high load carrying capacity, high degree of rigidity
- Superior running accuracy, short running-in time
- Facilitated mounting
- Compact cross sections
- Improved behaviour at high speeds
- Extended bearing service life, superior corrosion resistance
- Prevent entry of contaminants, high-speed capability
- Reduced mounting time
- Reduced maintenance
- Optimized oil lubrication
- Accommodate radial loads and axial loads in one direction, good permeability for lubrication


Features of E design bearings include:

- asymmetrical inner and outer rings
- a high number of relatively large balls
- an optimized lightweight cage with optimized guiding clearance
- an optimized chamfer design
- an open osculation


The asymmetrical bearing rings enable the bearings to accommodate radial loads and axial loads in one direction. The bearings have a high number of relatively large balls for increased load carrying capacity. The bearings have an outer ring shoulder-guided cage made of fabric reinforced phenolic resin, designed to enable good lubricant supply to the ball/raceway contact areas. The guiding clearance between the cage and the outer ring is optimized for improved behaviour at high speeds.

Depending on the series and size, the shape of some of the chamfers on the inner and outer rings is optimized for improved mounting accuracy. As a result, mounting is not only facilitated, but there is also less risk of damage to associated components. The open osculation of E design bearings enables very high speed capability.


Open bearings in the 70 .. E (VEX) series with a bore diameter  $d \geq 10$  mm typically have seal grooves in the outer rings.

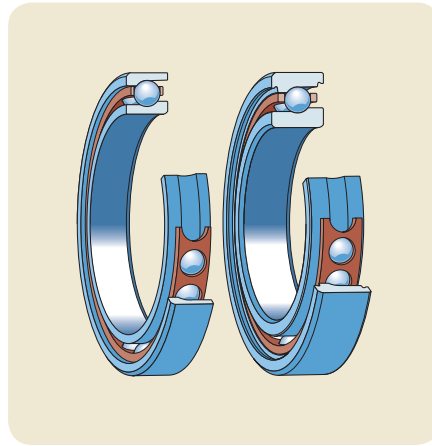

*E design bearings accommodate very high speeds and relatively high loads.*

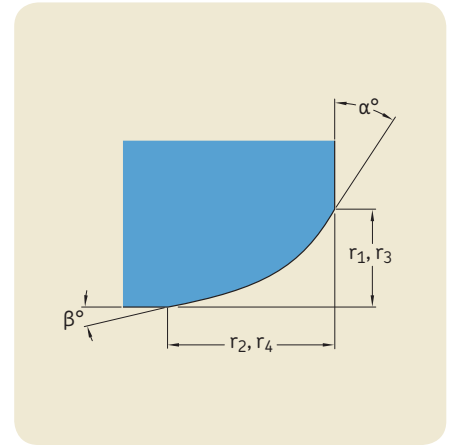

*Optimized design of the bearing ring chamfers facilitates mounting.*

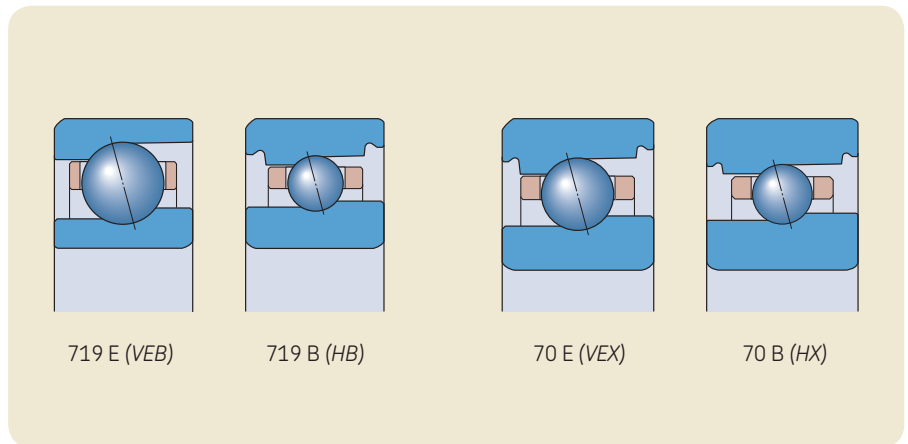

*High-speed E design bearings can accommodate higher speeds and heavier loads, compared to high-speed B design bearings.*



## Bearing series

The assortment of super-precision bearings presented in this brochure includes two ISO dimension series:

- the extremely light 19 series
- the light 10 series

Bearings in both these series are suitable for very high operational speeds and where there is tight radial mounting space.

## Bearing variants

Based on the operating conditions in precision applications, bearing requirements can vary. As a result, there are many variants of SKF super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series to choose from.

## Contact angles

Standard bearings are manufactured with the following contact angles:

- a 15° contact angle, designation suffix CE (1)
- a 25° contact angle, designation suffix ACE (3)

Bearings with an 18° contact angle, designation suffix FE (2), are available on request.

With three contact angles to choose from, designers can optimize their application based on axial load, speed and rigidity requirements. A larger contact angle provides a higher degree of axial stiffness and a higher axial load carrying capacity. However, this reduces speed capability.

## Ball materials

Standard bearings are available with:

- steel balls, no designation suffix
- ceramic (bearing grade silicon nitride) balls, designation suffix HC (NS)




As ceramic balls are considerably lighter and harder than steel balls, hybrid bearings can provide a higher degree of rigidity and run considerably faster than comparably sized all-steel bearings. The lower weight of the ceramic balls reduces the centrifugal forces within the bearing and generates less heat. Lower centrifugal forces are particularly important in machine tool applications where there are frequent rapid starts and stops. Less heat generated by the bearing means less energy consumption and longer bearing and grease service life.

### Series comparison

When increased system rigidity is required, bearings in the 719 series accommodate a larger shaft diameter for a given outside diameter, compared to bearings in the 70 series.

Three contact angles accommodate different axial load, speed and rigidity requirements.

The bearings are available in an all-steel and hybrid variant.

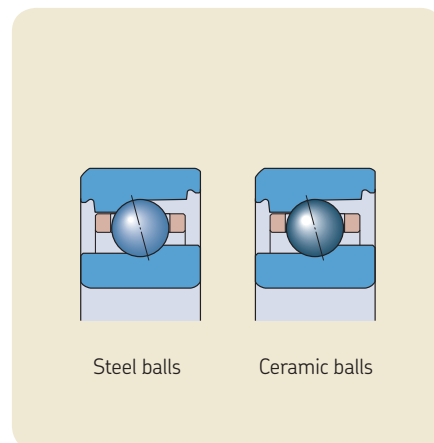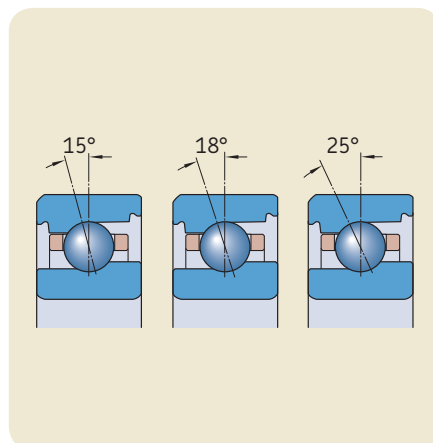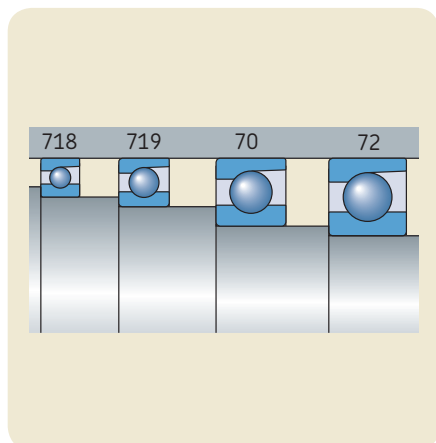


## Sealed bearings

Bearings in most sizes can be supplied with an integral seal fitted on both sides and filled with premium grease. The seal forms an extremely narrow gap with the cylindrical surface of the inner ring shoulder.

When compared to bearing arrangements with open bearings and external seals, those with sealed bearings provide a number of advantages including:

- extended bearing service life
- reduced need for maintenance
- reduced inventory
- reduced risk of lubricant contamination during mounting and operation

Sealed bearings are identified by the designation prefix *S* (suffix */S*).

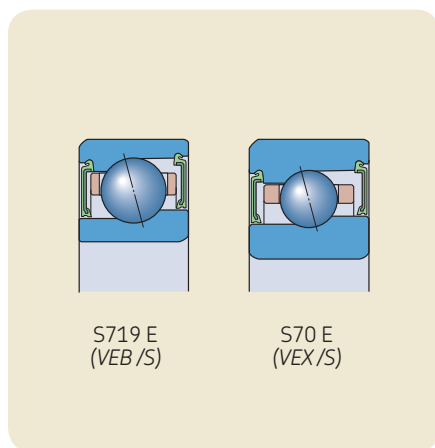

## Bearings made from NitroMax steel

Bearings in the 719 .. E (*VEB*) and 70 .. E (*VEX*) series can be supplied with rings made from NitroMax steel. NitroMax is a new generation high-nitrogen stainless steel with superior corrosion resistance, enhanced fatigue strength and a high degree of impact toughness. This ultra-clean steel can extend bearing service life in applications under good (full-film) as well as critical (thin-film) lubrication conditions.

Standard bearings made from NitroMax steel are supplied with ceramic balls. The combined properties of the NitroMax steel rings and ceramic balls greatly improve bearing performance, enabling these bearings to run several times longer than conventional hybrid bearings.

Sealed hybrid bearings made from NitroMax steel are identified by the designation prefix *SV* (suffix */S/XN*).

**Most sizes are available in a sealed variant**

## Open bearings for direct oil lubrication

To accommodate direct oil lubrication, the outer ring of open bearings can be manufactured with two lubrication holes. Additional features are available, depending on the bearing series and size.

## Single bearings and matched bearing sets


Bearings in 719 .. E (*VEB*) and 70 .. E (*VEX*) series are available, standard, as:

- single bearings
- single, universally matchable bearings
- matched bearing sets
- sets of universally matchable bearings


### Bearing variants for direct oil lubrication

#### Description

**Bearing variant**  
for open bearings in the series  
719 .. E (*VEB*)

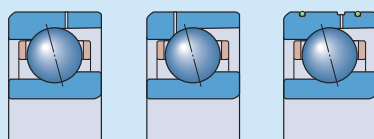

70 .. E (*VEX*)

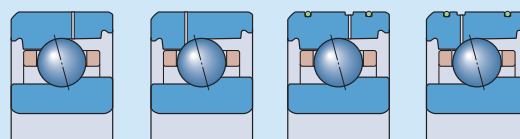

	719 .. E ( <i>VEB</i> )			70 .. E ( <i>VEX</i> )			
	H ( <i>H</i> )	H1 ( <i>H1</i> )	L ( <i>GH</i> )	H ( <i>H</i> )	H1 ( <i>H1</i> )	L ( <i>GH</i> )	L1 ( <i>G1</i> )
<b>Bore diameter range d [mm]</b>	8 to 35	40 to 120	20 to 120	6 to 17 <sup>1)</sup>	20 to 120	20 to 120	20 to 120
<b>Lubrication features</b>	Two lubrication holes in the outer ring	Annular groove and two lubrication holes in the outer ring	Annular groove and two lubrication holes in the outer ring	Two lubrication holes in the outer ring	Annular groove and two lubrication holes in the outer ring	Annular groove and two lubrication holes in the outer ring	Annular groove and two lubrication holes in the outer ring
<b>Sealing features</b>	None	Two annular grooves in the outer ring fitted with O-rings	Two annular grooves in the outer ring fitted with O-rings	None	Two annular grooves in the outer ring fitted with O-rings	Two annular grooves in the outer ring fitted with O-rings	Two annular grooves in the outer ring fitted with O-rings

<sup>1)</sup> Bearings in the 70 .. E (*VEX*) series with a bore diameter d = 6 to 9 mm do not have seal grooves in the outer ring, as shown in the illustration above.

# Applications

Machine tool applications, such as high-speed milling machines, machining centres and grinding machines, require high positioning accuracy and low levels of heat generation. The ability of bearings in the 719 .. E (VEB) and 70 .. E (VEX) series to meet these requirements and still provide a high degree of rigidity at very high operational speeds, makes them an excellent solution for these and similar applications.

In the highly contaminated environment of a machine tool spindle, one of the primary causes of premature bearing failure is the ingress of solid contaminants and/or cutting fluid into the bearing cavity. To eliminate this problem, sealed bearings in the S719 .. E (VEB .. /S) and S70 .. E (VEX .. /S) series are an excellent solution.

Where maximum speeds are required, bearing variants for direct oil lubrication combined with ceramic balls provide optimum performance.

## Applications

- High-speed machining centres (horizontal and vertical)
- High-speed milling machines
- High-speed internal grinding machines
- High-speed spindles for PCB drilling
- Turbomolecular pumps
- Woodworking machines

## Requirements


- High-speed capability
- High positioning accuracy
- High degree of system rigidity
- Low energy consumption
- Long service life
- Facilitated mounting
- Increased machine uptime
- High power density for compact designs
- Effective sealing against contaminants

## Solution



*SKF super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series*

A

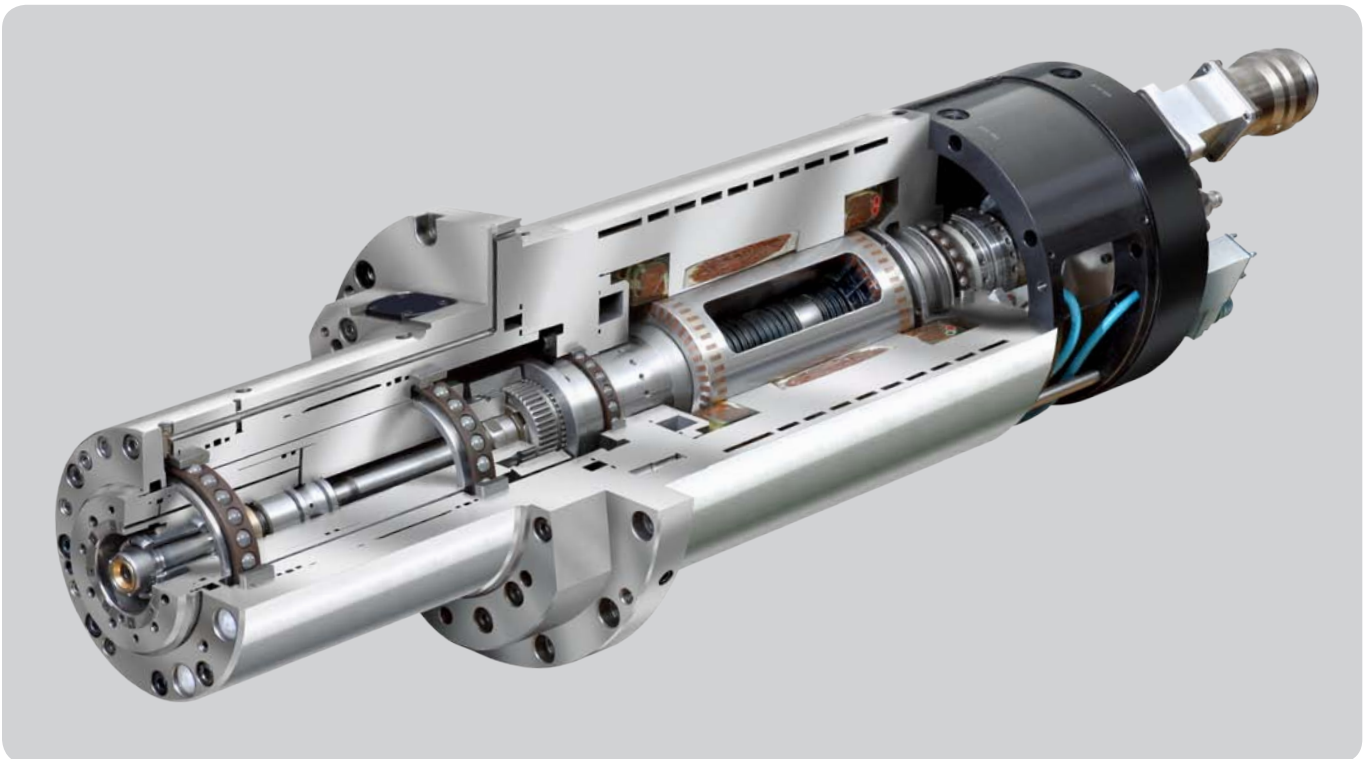

# Bearing arrangement design

Bearing arrangements using SKF super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series can be designed using single bearings or bearing sets. An example of the ordering possibilities for a three-bearing arrangement is provided in **table 1**.

## Single bearings

Bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are available as single (stand-alone) bearings or single, universally matchable bearings. When ordering single bearings, indicate the number of individual bearings required.

## Single bearings

Single bearings are intended for arrangements where only one bearing is used in each bearing position.

Although the widths of the bearing rings are made to very tight tolerances, these bearings are not suitable for mounting immediately adjacent to each other.

## Single, universally matchable bearings

Universally matchable bearings are specifically manufactured so that when mounted in random order, but immediately adjacent to each other, a given preload and/or even load distribution is obtained without the use of shims or similar devices. These bearings can be mounted in random order for any desired bearing arrangement.

Single, universally matchable bearings are available in three preload classes and are identified by the designation suffix G (U).

## Bearing sets

Bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are available as matched bearing sets or as sets of universally matchable bearings. When ordering bearing sets, indicate the number of bearing sets required (the number of individual bearings per set is specified in the designation).

## Matched bearing sets

Bearings can be supplied as a complete bearing set consisting of two, three or four bearings. The bearings are matched to each other during production so that when mounted immediately adjacent to each other, in a specified order, a given preload and/or even load distribution is obtained without the use of shims or similar devices. The bore and outside diameters of these bearings are matched to within a maximum of one-third of the applicable permitted diameter tolerance, resulting in an even better load distribution when mounted, compared to single, universally matchable bearings.

Matched bearing sets are available in three preload classes for symmetrical bearing arrangements and six preload classes for asymmetrical bearing arrangements.

## Sets of universally matchable bearings

The bearings in these sets can be mounted in random order for any desired bearing arrangement. The bore and outside diameters of universally matchable bearings in a set are matched to within a maximum of

Table 1

### Example of the ordering possibilities for a three-bearing arrangement

Design criteria	What to order	Bearing designation <sup>1)</sup>	Order example
Bearing arrangement is not known	Three single, universally matchable bearings	70 .. EG../P4A (VEX .. 7CE .. U..)	3 x 7014 CEGA/P4A (3 x VEX 70 7CE1 UL)
Bearing arrangement is not known and improved load distribution is desirable	A set of three universally matchable bearings	70 .. E/P4ATG.. (VEX .. 7CE .. TU..)	1 x 7014 CE/P4ATGA (1 x VEX 70 7CE1 TUL)
Bearing arrangement is known and maximum rigidity is required	Three bearings in a matched set	70 .. E/P4AT.. (VEX .. 7CE .. T..)	1 x 7014 CE/P4ATBTA (1 x VEX 70 7CE1 TD17,5DaN)
Bearing arrangement is known and maximum speed is required	Three bearings in a matched set	70 .. E/P4AT.. (VEX .. 7CE .. T..)	1 x 7014 CE/P4ATBTL (1 x VEX 70 7CE1 TDL)

<sup>1)</sup> For additional information about designations, refer to **table 17** on **pages 32 and 33**.

one-third of the applicable permitted diameter tolerance, resulting in an even better load distribution when mounted, compared to single, universally matchable bearings.

Sets of universally matchable bearings are available in three preload classes. Like single, universally matchable bearings, sets of universally matchable bearings are identified by the designation suffix G (U), but their positions in the designation differ (→ table 1).

## Type of arrangement

Universally matchable bearings and matched bearing sets can be arranged in various configurations depending on the stiffness, rigidity and load requirements of the application. The possible configurations are shown in **fig. 1**, including the designation suffixes applicable to matched bearing sets.

### Back-to-back bearing arrangement

In a back-to-back bearing arrangement, the load lines diverge toward the bearing axis. Axial loads acting in both directions can be accommodated, but only by one bearing or bearing set in one direction each. Bearings mounted back-to-back provide a relatively rigid bearing arrangement that can also accommodate tilting moments.

### Face-to-face bearing arrangement

In a face-to-face bearing arrangement, the load lines converge toward the bearing axis. Axial loads acting in both directions can be accommodated, but only by one bearing or bearing set in one direction each. Face-to-face arrangements are less suitable to accommodate tilting moments.


### Tandem bearing arrangement

The axial load carrying capacity of a bearing arrangement can be increased by adding bearings mounted in tandem. In a tandem bearing arrangement, the load lines are parallel so that radial and axial loads are shared equally by the bearings in the set. The bearing set can only accommodate axial loads acting in one direction. If axial loads


act in the opposite direction, or if combined loads are present, additional bearing(s) adjusted against the tandem arrangement should be added.

Fig. 1


#### Bearing sets with 2 bearings



Back-to-back arrangement  
Designation suffix DB (DD)




Face-to-face arrangement  
Designation suffix DF (FF)




Tandem arrangement  
Designation suffix DT (T)


#### Bearing sets with 3 bearings



Back-to-back and tandem  
arrangement  
Designation suffix TBT (TD)




Face-to-face and tandem  
arrangement  
Designation suffix TFT (TF)




Tandem arrangement  
Designation suffix TT (3T)


#### Bearing sets with 4 bearings




Tandem back-to-back  
arrangement  
Designation suffix QBC (TDT)




Tandem face-to-face  
arrangement  
Designation suffix QFC (TFT)



Tandem arrangement  
Designation suffix QT (4T)



Back-to-back and tandem  
arrangement  
Designation suffix QBT (3TD)




Face-to-face and tandem  
arrangement  
Designation suffix QFT (3TF)


## Application examples

Super-precision angular contact ball bearings are common in, but not limited to, machine tool spindles. Depending on the type of machine tool and its intended purpose, spindles may require different bearing arrangements.

When very high operational speeds are required, as is the case for high-speed machining centres, milling operations and grinding applications, there is typically a compromise between rigidity and load carrying capacity. For many of these applications, there is an optimal bearing arrangement using bearings in the 719 .. E (VEB) and 70 .. E (VEX) series to provide the best possible combination of rigidity, load carrying capacity, heat generation and bearing service life. These bearings also enable the design of compact bearing arrangements, which is beneficial where radial space is limited.

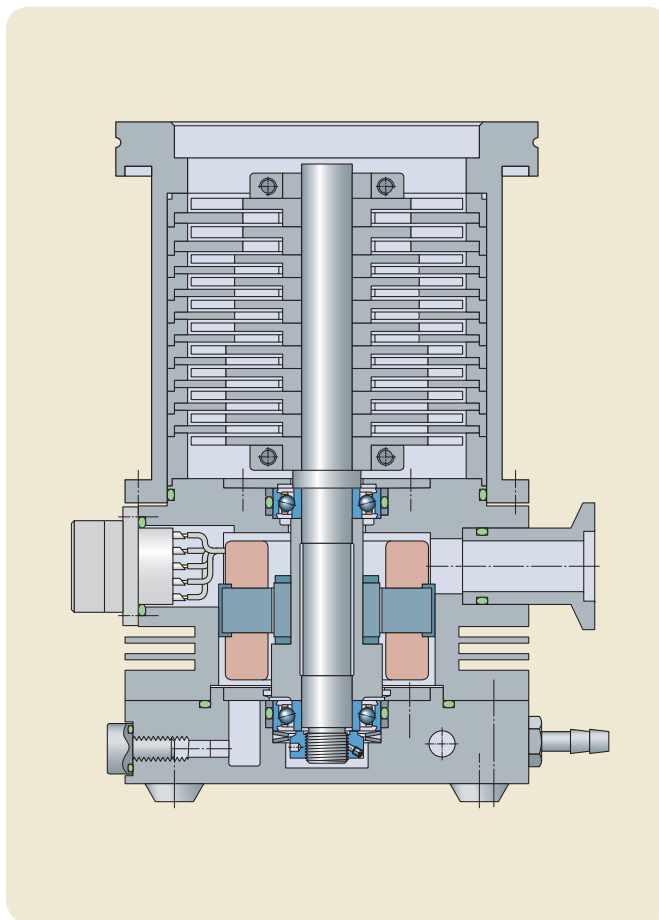


**Turbomolecular pump**  
In turbomolecular pumps, high-speed capability, low vibration levels and long service life are stringent operational requirements. This grease-lubricated pump uses two hybrid super-precision angular contact ball bearings, arranged face-to-face, e.g. 7002 CE/HCP4A (VEX 15 /NS 7CE1). The rotor shaft bearings are preloaded with spring washers.

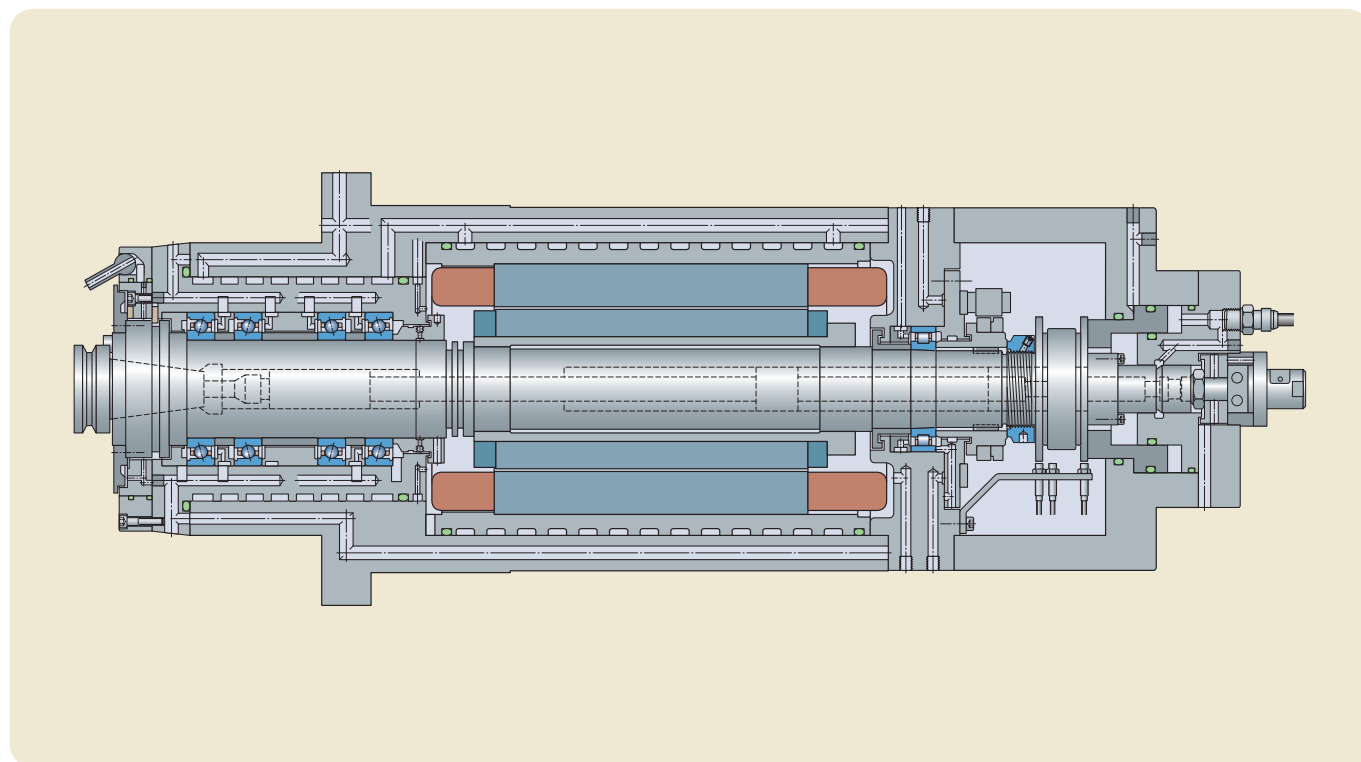

### **Electro-spindle in a horizontal machining centre**


Machining centres typically operate at high speeds, under relatively high loads. In this spindle, the tool end has a matched set of four super-precision angular contact ball bearings mounted in a tandem back-to-back arrangement, e.g. 7014 CE/P4AQBCA (VEX 70 7CE1 TDTA), separated by a set of precision-matched spacer rings. Each bearing is lubricated with oil-air via a separate nozzle. A super-precision single row cylindrical roller bearing, e.g. N 1011 KPHA/SP, is at the non-tool end.

B

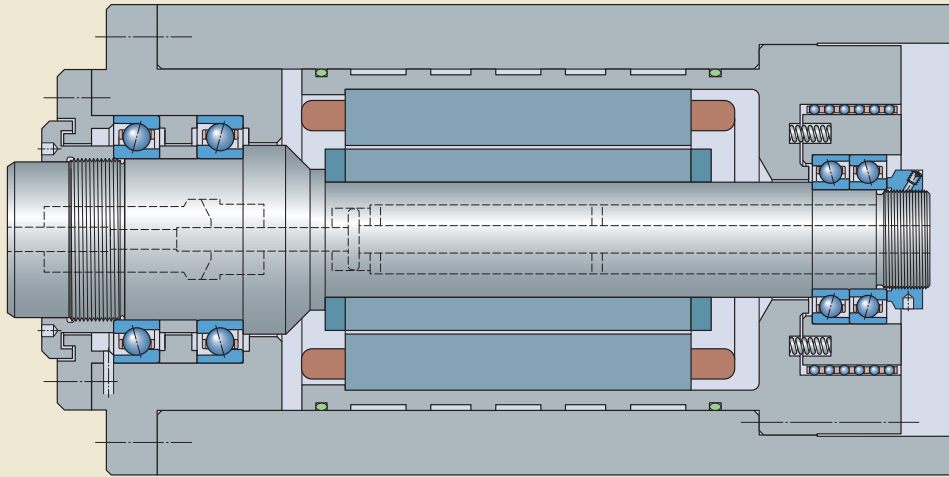

**Electro-spindle for an internal grinding machine**

A high-speed internal grinding machine requires a high degree of system rigidity. Often, radial space is limited. This spindle has two tandem pairs of super-precision angular contact ball bearings, mounted in a back-to-back arrangement, e.g. 71912 CE/P4ADT (VEB 60 7CE1 T) and 71908 CE/P4ADT (VEB 40 7CE1 T). The bearings at the non-tool end are preloaded with springs.

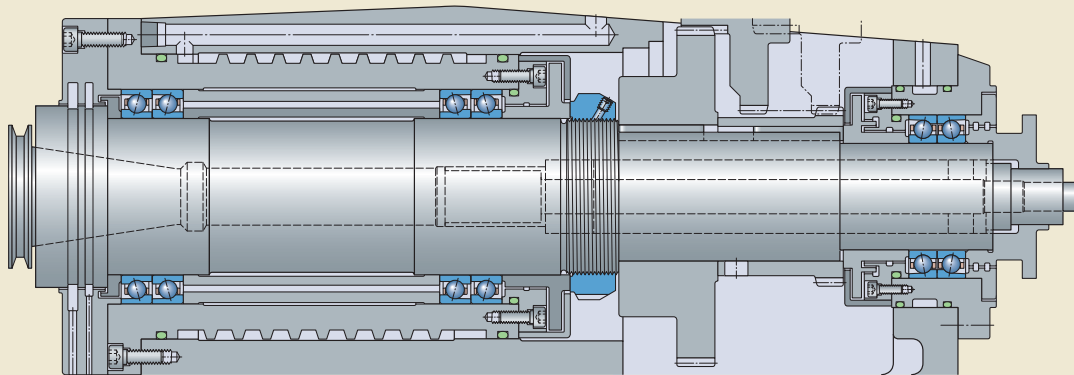

**Horizontal machining centre**

This spindle, which operates at very high speeds, uses a matched set of four super-precision angular contact ball bearings mounted in a tandem back-to-back arrangement, e.g. 71922 CE/P4AQBCA (VEB 110 7CE1 TDTL), separated by a set of precision-matched spacer rings. The non-tool end has a matched set of high-precision angular contact ball bearings mounted back-to-back, e.g. 7015 CD/P4ADBB (EX 75 7CE1 DDM).

# Lubrication

Heat resulting from friction is a constant threat to production equipment. One way to reduce heat and the wear associated with friction, particularly in bearings, is to be sure that the correct quantity of the appropriate lubricant reaches all necessary parts.

## Grease lubrication

### Open bearings

In most applications with open bearings in the 719 .. E (VEB) and 70 .. E (VEX) series, grease with a mineral base oil and lithium thickener is suitable. These greases, which adhere well to the bearing surfaces, can accommodate operating temperatures ranging from  $-30$  to  $+100$  °C. For bearing arrangements that operate at very high speeds and temperatures, and where long service life is required, the use of grease based on a synthetic oil, e.g. the diester oil based grease SKF LGLT 2, has been proven effective.

In high-speed applications, less than 30% of the free space in the bearings should be filled with grease. The initial grease fill depends on the bearing series and size as well as the speed factor, which is

$$A = n d_m$$

where

A = speed factor [mm/min]

n = rotational speed [r/min]

$d_m$  = bearing mean diameter  
=  $0,5 (d + D)$  [mm]

The initial grease fill for open bearings can be estimated by

$$G = K G_{ref}$$

where

G = initial grease fill [cm<sup>3</sup>]

K = a calculation factor dependent on the speed factor A (→ **diagram 1**)

$G_{ref}$  = reference grease quantity (→ **table 1**) [cm<sup>3</sup>]

### Sealed bearings

Sealed bearings in the S719 .. E (VEB .. /S) and S70 .. E (VEX .. /S) series are filled with a high-grade, low viscosity grease that fills approximately 15% of the free space in the bearing. The bearings are relubrication-free under normal operating conditions.

The grease is characterized by:

- high-speed capability
- excellent ageing resistance
- very good rust inhibiting properties

The technical specifications of the grease are provided in **table 2**.

### Running-in of open and sealed, grease lubricated bearings

A grease lubricated super-precision bearing will initially run with a relatively high frictional moment. If the bearing is run at high speed without a running-in period, the temperature rise can be considerable. The relatively high frictional moment is due to the churning of the grease and it takes time for the excess grease to work its way out of the contact zone. For open bearings, this time period can be minimized by applying a small quantity of grease distributed evenly on both sides of the bearing during the assembly stage. Spacers between two adjacent bearings are also beneficial (→ *Adjusting preload with spacer rings*, **page 23**).


The time required to stabilize the operating temperature depends on a number of factors – the type of grease, the initial grease fill, how the grease is applied to the bearings and the running-in procedure (→ **diagram 2** on **page 16**).

Super-precision bearings can typically operate with a minimum quantity of lubricant when properly run-in, enabling the lowest frictional moment and temperature to be achieved. Grease that collects on each side of the bearing acts as a reservoir, enabling oil to bleed into the raceway to provide effective lubrication for a long time.

Running-in can be done in several ways. Wherever possible and regardless of the procedure chosen, running-in should involve operating the bearing in both a clockwise and anticlockwise direction. For additional information about running-in

Diagram 1

Factor K for initial grease fill (estimated)

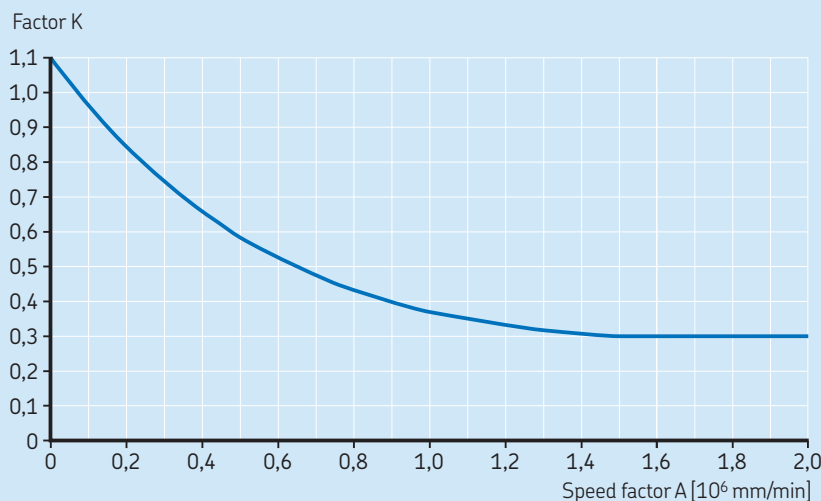

procedures, refer to the *SKF Interactive Engineering Catalogue* available online at [www.skf.com](http://www.skf.com).

## Oil lubrication

Oil lubrication is recommended for open bearings in the 719 .. E (VEB) and 70 .. E (VEX) series where very high speeds preclude the use of grease as a lubricant.

### Oil-air lubrication method

In some precision applications, the very high operational speeds and requisite low operating temperatures generally require an oil-air lubrication system. With the oil-air method, also called the oil-spot method,

accurately metered quantities of oil are directed at each individual bearing by compressed air. For bearings used in sets, each bearing is supplied by a separate injector. Most designs include special spacers that incorporate the oil nozzles.

Guidelines for the quantity of oil to be supplied to each bearing for very high speed operation can be obtained from

$$Q = 1,3 d_m$$

where

$$Q = \text{oil flow rate [mm}^3/\text{h]}$$

$$d_m = \text{bearing mean diameter}$$

$$= 0,5 (d + D) [\text{mm}]$$

The calculated oil flow rate should be verified during operation and adjusted, depending on the resulting temperatures.

Oil is supplied to the feed lines at given intervals by a metering unit. The oil coats the inside surface of the feed lines and "creeps" toward the nozzles (→ **fig. 1**), where it is delivered to the bearings. The oil nozzles should be positioned correctly (→ **table 3 on page 16**) to make sure that the oil is introduced into the contact area between the balls and raceways and to avoid interference with the cage.

High quality lubricating oils without EP additives are generally recommended for super-precision angular contact ball bearings. Oils with a viscosity of 40 to 100 mm<sup>2</sup>/s at 40 °C are typically used. A filter that pre-

Table 1

#### Reference grease quantity for initial grease fill estimation

Bearing Bore diameter d	Size	Reference grease quantity <sup>1)</sup> for open bearings in the series 719 .. E (VEB) 70 .. E (VEX)	
		$G_{ref}$	
mm	–	cm <sup>3</sup>	
6	6	–	0,09
7	7	–	0,11
8	8	0,09	0,17
9	9	0,09	0,19
10	00	0,1	0,28
12	01	0,1	0,31
15	02	0,2	0,5
17	03	0,2	0,68
20	04	0,5	1,1
25	05	0,6	1,3
30	06	0,6	1,7
35	07	0,8	2,4
40	08	1,4	2,8
45	09	1,5	3,4
50	10	1,7	4,1
55	11	2,3	5
60	12	2,5	5,3
65	13	2,6	6,2
70	14	4,3	8,2
75	15	4,5	8,6
80	16	4,8	12
85	17	6,7	12
90	18	7	14
95	19	7,3	17
100	20	10	17
110	22	11	23
120	24	15	28

<sup>1)</sup> Refers to a 30% filling grade.

Fig. 1

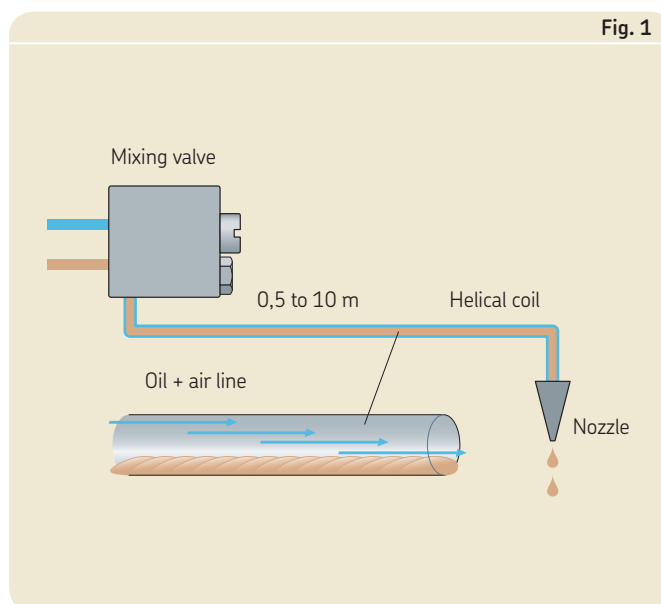


Table 2

#### Technical specifications of the grease in sealed bearings

Properties	Grease specification
Thickener	Special lithium soap
Base oil type	Ester/PAO
NLGI consistency class	2
Temperature range [°C] [°F]	–40 to +120 –40 to +250
Kinematic viscosity [mm <sup>2</sup> /s] at 40 °C at 100 °C	25 6

vents particles > 5 μm from reaching the bearings should also be incorporated.

### Direct oil lubrication


For very high operational speeds, the injection of small amounts of oil-air into the bearing is beneficial. With this method, lubricant dispersion is prevented, as the lubricant is supplied directly and safely to the ball/raceway contact areas through the outer ring. As a result, lubricant consumption is minimized and bearing performance is improved.

There are three bearing variants in the 719 .. E (VEB) series and four bearing variants in the 70 .. E (VEX) series for direct oil lubrication (→ *Bearing variants*, page 6). The positions of the lubrication and sealing features in these bearings are provided in table 4.

To select the most appropriate variant for direct oil lubrication, keep the following in mind:

- Bearings with an annular groove in the outer ring that coincides with the two lubrication holes enable a more reliable supply of lubricant through the outer ring, compared to those without an annular groove.

- Bearings with lubrication holes manufactured on the thicker bearing shoulder side enable the lubricant to be supplied very close to the ball/raceway contact areas. These bearings can therefore be used to achieve maximum speeds.
- To prevent lubricant leakage between the bearing outside diameter and the housing bore, bearings fitted with O-rings in the outer ring are an excellent solution as no additional machining is required. When bearings without this sealing feature are used, SKF recommends machining the housing bore and incorporating O-rings into the bearing arrangement design (→ fig. 2).

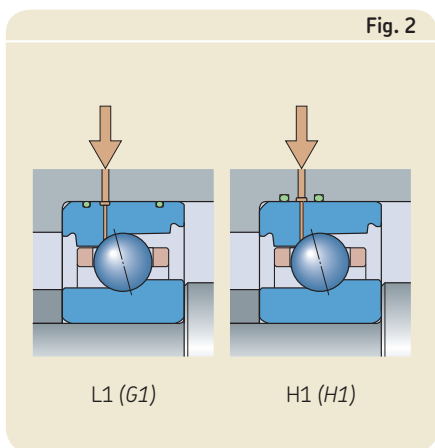

**Table 3**

**Oil nozzle position for oil-air lubrication**

Bearing Bore diameter	Size	Oil nozzle position for open bearings in the series	
		719 .. E (VEB)	70 .. E (VEX)
d		d <sub>n</sub>	
mm	–	mm	
6	6	–	10,1
7	7	–	11,4
8	8	12,2	13,3
9	9	13,3	14,8
10	00	14,8	16,5
12	01	16,8	18,5
15	02	20	21,9
17	03	22	24,1
20	04	26,7	28,1
25	05	31,8	33,1
30	06	36,8	39,9
35	07	43	45,6
40	08	48	51,6
45	09	54,2	57,6
50	10	58,4	62,3
55	11	64,6	69,6
60	12	69,6	74,6
65	13	74,5	79,3
70	14	81,5	86,5
75	15	86,5	91,5
80	16	91,5	98,5
85	17	98,6	103,5
90	18	103,5	111
95	19	108,5	115,4
100	20	115,4	120,4
110	22	125,4	135,4
120	24	137,4	144,9


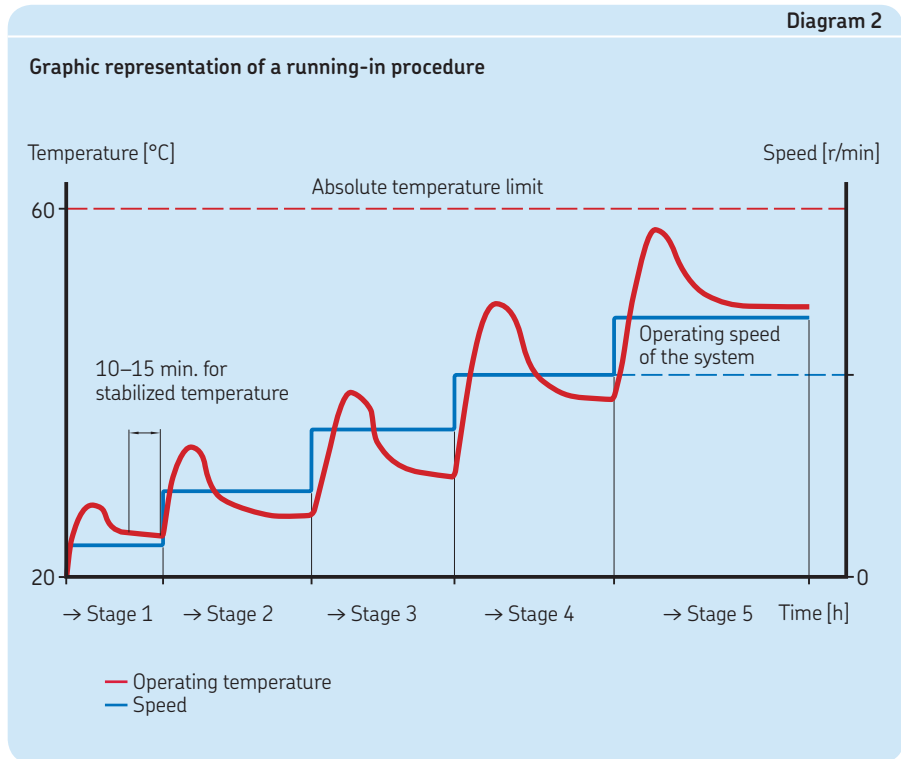


Table 4

Dimensions for direct oil lubrication

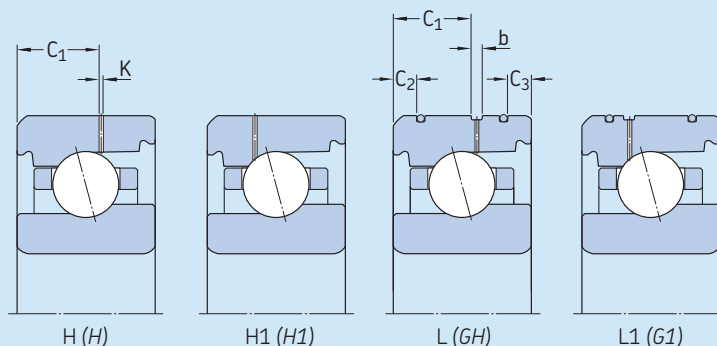

Bearing Bore diameter	Size	Dimensions of bearings in the 719 .. E (VEB) series for variant with designation suffix								Dimensions of bearings in the 70 .. E (VEX) series for variant with designation suffix												
		H (H)		H1 (H1)		L (GH)		C <sub>2</sub>	C <sub>3</sub>	b	H (H)		H1 (H1)		L (GH)		L1 (G1)					
mm	-	mm		mm		mm					mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
6	6	-	-	-	-	-	-	-	-	3,65	0,5	-	-	-	-	-	-	-	-	-	-	-
7	7	-	-	-	-	-	-	-	-	3,65	0,5	-	-	-	-	-	-	-	-	-	-	-
8	8	3,65	0,5	-	-	-	-	-	-	4,25	0,5	-	-	-	-	-	-	-	-	-	-	-
9	9	3,65	0,5	-	-	-	-	-	-	4,25	0,5	-	-	-	-	-	-	-	-	-	-	-
10	00	3,65	0,5	-	-	-	-	-	-	4,75	0,5	-	-	-	-	-	-	-	-	-	-	-
12	01	3,65	0,5	-	-	-	-	-	-	4,9	0,5	-	-	-	-	-	-	-	-	-	-	-
15	02	4,3	0,5	-	-	-	-	-	-	5,35	0,5	-	-	-	-	-	-	-	-	-	-	-
17	03	4,35	0,5	-	-	-	-	-	-	6,05	0,5	-	-	-	-	-	-	-	-	-	-	-
20	04	5,45	0,5	-	-	4,6	1,4	0,9	1,5	-	-	3,67	0,5	5,9	1,8	1,9	1,9	3,2	1,45	1,9	1,4	1,4
25	05	5,45	0,5	-	-	4,6	1,4	0,9	1,5	-	-	3,72	0,5	5,9	1,8	1,9	2,1	3,2	1,45	1,9	1,4	1,4
30	06	5,45	0,5	-	-	4,6	1,4	0,9	1,5	-	-	4,23	0,5	6,5	2,3	2,6	1,8	3,7	1,95	2,6	1,4	1,4
35	07	6,15	0,5	-	-	5,1	1,8	1,2	1,6	-	-	4,52	0,5	7,3	2,2	2,8	1,7	4	2,2	2,8	1,4	1,4
40	08	-	-	3,75	0,5	5,9	1,8	1,8	2	-	-	5,03	0,5	7,8	2,5	3	1,7	4,5	2,5	3	1,4	1,4
45	09	-	-	3,75	0,5	5,9	2,3	1,8	2	-	-	5,53	0,5	8,6	3	3	1,7	5	3	3	1,4	1,4
50	10	-	-	3,53	0,5	5,9	2,3	1,8	2,2	-	-	5,32	0,5	8,6	2,7	3	1,7	4,7	2,7	3	1,6	1,6
55	11	-	-	3,83	0,5	6,5	2,5	2	2,2	-	-	6,3	0,5	9	3,4	3,4	2,4	5,65	3,4	3,4	1,6	1,6
60	12	-	-	3,83	0,5	6,5	2,5	2	2,2	-	-	6,3	0,5	9	3,4	3,4	2,4	5,65	3,4	3,4	1,6	1,6
65	13	-	-	3,83	0,5	6,5	2,5	2	2,2	-	-	5,92	0,5	9,7	3,3	3,3	1,9	5,3	3,3	3,3	1,6	1,6
70	14	-	-	4,9	0,5	8,6	2,8	2,8	2	-	-	6,7	0,5	10,9	3,4	3,4	1,9	6,05	3,4	3,4	1,6	1,6
75	15	-	-	4,9	0,5	8,6	2,8	2,8	2	-	-	6,73	0,5	10,9	3,4	3,4	1,8	6,1	3,4	3,4	1,6	1,6
80	16	-	-	4,9	0,5	8,6	2,8	2,8	2	-	-	7,27	0,5	11,1	3,8	3,8	2,8	6,5	3,8	3,8	1,8	1,8
85	17	-	-	5,48	0,5	9,3	3	3	2,6	-	-	7,27	0,5	11,1	3,8	3,8	2,8	6,5	3,8	3,8	1,8	1,8
90	18	-	-	5,48	0,5	9,3	3	3	2,6	-	-	8,33	0,5	13,2	4,3	4,3	2,6	7,6	4,3	4,3	1,8	1,8
95	19	-	-	5,48	0,5	9,3	3	3	2,6	-	-	7,81	0,5	13,4	4,3	4,3	2,2	7,1	4,3	4,3	1,8	1,8
100	20	-	-	6,05	0,5	10,9	3	3,3	2,3	-	-	7,82	0,5	13,4	4	4	2,2	7,1	4	4	1,8	1,8
110	22	-	-	5,78	0,5	10,9	3,5	3	2,3	-	-	9,84	0,5	15,1	5,4	5,4	2,6	9,05	5,4	5,4	1,8	1,8
120	24	-	-	6,31	0,5	11,9	4,2	3,6	2,6	-	-	9,38	0,5	15	5,4	5,4	2,8	8,6	5,4	5,4	1,8	1,8

# Bearing data – general

## Boundary dimensions

The principal dimensions of SKF super-precision angular contact ball bearings are in accordance with ISO 15:2011:

- Boundary dimensions for bearings in the 719 .. E (VEB) series are in accordance with ISO dimension series 19.
- Boundary dimensions for bearings in the 70 .. E (VEX) series are in accordance with ISO dimension series 10.

## Chamfer dimensions

Minimum values for the chamfer dimensions in the radial direction ( $r_1$ ,  $r_3$ ) and the axial direction ( $r_2$ ,  $r_4$ ) are provided in the product tables.

For bearings in the 719 .. E (VEB) series, the values for the chamfers on the non-thrust side of the inner ring up to a bore diameter  $d = 30$  mm, thrust side of the inner ring, and thrust side of the outer ring are in accordance with ISO 15:2011. The values for the chamfers on the non-thrust side of the inner ring for a bore diameter  $d > 30$  mm are smaller than those in

accordance with ISO 15:2011. The values for the chamfers on the non-thrust side of the outer ring are in accordance with ISO 12044:1995.

For bearings in the 70 .. E (VEX) series, the values for the chamfers on the inner ring and thrust side of the outer ring are in accordance with ISO 15:2011. The values for the chamfers on the non-thrust side of the outer ring are in accordance with ISO 12044:1995.

The appropriate maximum chamfer limits are in accordance with ISO 582:1995.

Table 1

### Class P4A tolerances

#### Inner ring

d	over	incl.	$\Delta_{dmp}$	low	$\Delta_{ds}$	high	low	$V_{dp}$	$V_{dmp}$	$\Delta_{Bs}$	high	low	$\Delta_{B1s}$	high	low	$V_{Bs}$	$K_{ia}$	$S_d$	$S_{ia}$
mm			$\mu\text{m}$		$\mu\text{m}$			$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$			$\mu\text{m}$			$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$
2,5	10		0	-4	0	-4		1,5	1	0	-40	0	-250	1,5	1,5	1,5	1,5	1,5	1,5
10	18		0	-4	0	-4		1,5	1	0	-80	0	-250	1,5	1,5	1,5	1,5	1,5	1,5
18	30		0	-5	0	-5		1,5	1	0	-120	0	-250	1,5	2,5	1,5	1,5	1,5	2,5
30	50		0	-6	0	-6		1,5	1	0	-120	0	-250	1,5	2,5	1,5	1,5	1,5	2,5
50	80		0	-7	0	-7		2	1,5	0	-150	0	-250	1,5	2,5	1,5	1,5	1,5	2,5
80	120		0	-8	0	-8		2,5	1,5	0	-200	0	-380	2,5	2,5	2,5	2,5	2,5	2,5

#### Outer ring

D	over	incl.	$\Delta_{Dmp}$	low	$\Delta_{Ds}$	high	low	$V_{Dp}$	$V_{Dmp}$	$\Delta_{Cs}, \Delta_{C1s}$	$V_{Cs}$	$K_{ea}$	$S_D$	$S_{ea}$
mm			$\mu\text{m}$		$\mu\text{m}$			$\mu\text{m}$	$\mu\text{m}$		$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$
10	18		0	-4	0	-4		1,5	1	Values are identical to those for the inner ring of the same bearing ( $\Delta_{Bs}$ , $\Delta_{B1s}$ )	1,5	1,5	1,5	1,5
18	30		0	-5	0	-5		2	1,5		1,5	1,5	1,5	1,5
30	50		0	-6	0	-6		2	1,5		1,5	2,5	1,5	2,5
50	80		0	-7	0	-7		2	1,5		1,5	4	1,5	4
80	120		0	-8	0	-8		2,5	1,5		2,5	5	2,5	5
120	150		0	-9	0	-9		4	1,5		2,5	5	2,5	5
150	180		0	-10	0	-10		6	3		4	6	4	6

## Tolerances

Bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are manufactured, standard, to P4A tolerance class. On request, bearings can be supplied to the higher precision PA9A tolerance class.

The tolerance values are listed as follows:

- P4A (better than ABEC 7) tolerance class in **table 1**
- PA9A (better than ABEC 9) tolerance class in **table 2**

The tolerance symbols used in these tables are listed together with their definitions in **table 3**, on **page 20**.

## Bearing preload

A single super-precision angular contact ball bearing does not have any preload. Preload can only be obtained when one bearing is placed against another to provide location in the opposite direction.

### Preload in sets of universally matchable bearings and matched bearing sets prior to mounting

Universally matchable bearings and matched bearing sets are manufactured so that when the bearings are placed against each other, prior to mounting, a certain preload will result.

To meet the varying requirements with regard to rotational speed and rigidity, bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are produced to different preload classes.

In applications where a maximum degree of rigidity is required, one of the following preload classes should be selected:

- class A (L), light preload

- class B (M), moderate preload
- class C (F), heavy preload

These preload classes are valid for:

- single, universally matchable bearings
- sets of universally matchable bearings
- all matched bearing sets

The preload level depends on the bearing series, the contact angle, the inner geometry and the size of the bearing, and applies to bearing sets with two bearings arranged back-to-back or face-to-face as listed in **table 4** on **page 21**.

Bearing sets in the A, B or C preload class, consisting of three or four bearings, will have a heavier preload than sets with two bearings in the A, B or C preload class. The preload for these bearing sets is obtained by multiplying the values listed in **table 4** on **page 21** by a factor of:

- 1,35 for TBT (TD) and TFT (TF) arrangements
- 1,6 for QBT (3TD) and QFT (3TF) arrangements
- 2 for QBC (TDT) and QFC (TFT) arrangements

Table 2

#### Class PA9A tolerances

Inner ring		$\Delta_{dmp}$		$\Delta_{ds}$		$V_{dp}$		$\Delta_{Bs}$		$\Delta_{B1s}$		$V_{Bs}$		$K_{ia}$		$S_d$		$S_{ia}$	
over	incl.	high	low	high	low	max	max	high	low	high	low	max	max	max	max	max	max	max	max
mm		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$	
2,5	10	0	-2,5	0	-2,5	1,5	1	0	-40	0	-250	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
10	18	0	-2,5	0	-2,5	1,5	1	0	-80	0	-250	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
18	30	0	-2,5	0	-2,5	1,5	1	0	-120	0	-250	1,5	2,5	1,5	1,5	1,5	1,5	1,5	2,5
30	50	0	-2,5	0	-2,5	1,5	1	0	-120	0	-250	1,5	2,5	1,5	1,5	1,5	1,5	1,5	2,5
50	80	0	-4	0	-4	2	1,5	0	-150	0	-250	1,5	2,5	1,5	1,5	1,5	1,5	1,5	2,5
80	120	0	-5	0	-5	2,5	1,5	0	-200	0	-380	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
Outer ring		$\Delta_{Dmp}$		$\Delta_{Ds}$		$V_{Dp}$		$\Delta_{Cs}, \Delta_{C1s}$		$V_{Cs}$		$K_{ea}$		$S_D$		$S_{ea}$			
over	incl.	high	low	high	low	max	max			max	max	max	max	max	max	max	max		
mm		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$				$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$		$\mu\text{m}$			
10	18	0	-2,5	0	-2,5	1,5	1	Values are identical to those for the inner ring of the same bearing ( $\Delta_{Bs}, \Delta_{B1s}$ )		1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5		
18	30	0	-4	0	-4	2	1,5			1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	
30	50	0	-4	0	-4	2	1,5			1,5	1,5	2,5	1,5	2,5	1,5	1,5	1,5	2,5	
50	80	0	-4	0	-4	2	1,5			1,5	4	1,5	4	1,5	1,5	1,5	4		
80	120	0	-5	0	-5	2,5	1,5			2,5	5	2,5	5	2,5	2,5	2,5	5		
120	150	0	-5	0	-5	2,5	1,5			2,5	5	2,5	5	2,5	2,5	2,5	5		
150	180	0	-7	0	-7	4	3			2,5	5	2,5	5	2,5	2,5	2,5	5		

In applications where maximum operational speeds are required, one of the following preload classes should be selected:

- class L, reduced light preload for asymmetrical bearing sets
- class M, reduced moderate preload for asymmetrical bearing sets
- class F, reduced heavy preload for asymmetrical bearing sets

As indicated, these preload classes are only available for matched bearing sets that are asymmetrical i.e. for TBT (*TD*), TFT (*TF*), QBT (*3TD*) and QFT (*3TF*) arrangements.

Bearing sets in the L, M or F preload class, consisting of three or four bearings, have the same preload as sets with two bearings in the A, B or C preload class.

Therefore, the preload for matched bearing sets that are asymmetrical i.e. for TBT (*TD*), TFT (*TF*), QBT (*3TD*) and QFT (*3TF*) arrangements, can be obtained directly from **table 4**.

An example of the various preload possibilities for the bearing 7014 CE/P4A is provided in **table 5** on **page 22**.

Bearing sets with a special preload can be supplied on request. These bearing sets are identified by the designation suffix G followed by a number. The number is the mean preload value of the set expressed in daN. Special preload is not applicable for sets of universally matchable bearings consisting of three or more bearings (suffixes TG and QG).

## Preload in mounted bearing sets

After mounting, sets of universally matchable bearings and matched bearing sets can have a heavier preload than the built-in preload, predetermined during manufacture. The increase in preload depends mainly on the actual tolerances for the bearing seats on the shaft and in the housing bore. An increase in preload can also be caused by deviations from the geometrical form of associated components such as cylindricity, perpendicularity or concentricity of the bearing seats.

During operation, an increase in preload can also be caused by:

Table 3

### Tolerance symbols

**Tolerance symbol**    **Definition**

#### Bore diameter

<b>d</b>	Nominal bore diameter
<b>d<sub>s</sub></b>	Single bore diameter
<b>d<sub>mp</sub></b>	Mean bore diameter; arithmetical mean of the largest and smallest single bore diameters in one plane
<b>Δ<sub>ds</sub></b>	Deviation of a single bore diameter from the nominal ( $\Delta_{ds} = d_s - d$ )
<b>Δ<sub>dmp</sub></b>	Deviation of the mean bore diameter from the nominal ( $\Delta_{dmp} = d_{mp} - d$ )
<b>V<sub>dp</sub></b>	Bore diameter variation; difference between the largest and smallest single bore diameters in one plane
<b>V<sub>dmp</sub></b>	Mean bore diameter variation; difference between the largest and smallest mean bore diameter

#### Outside diameter

<b>D</b>	Nominal outside diameter
<b>D<sub>s</sub></b>	Single outside diameter
<b>D<sub>mp</sub></b>	Mean outside diameter; arithmetical mean of the largest and smallest single outside diameters in one plane
<b>Δ<sub>Ds</sub></b>	Deviation of a single outside diameter from the nominal ( $\Delta_{Ds} = D_s - D$ )
<b>Δ<sub>Dmp</sub></b>	Deviation of the mean outside diameter from the nominal ( $\Delta_{Dmp} = D_{mp} - D$ )
<b>V<sub>Dp</sub></b>	Outside diameter variation; difference between the largest and smallest single outside diameters in one plane
<b>V<sub>Dmp</sub></b>	Mean outside diameter variation; difference between the largest and smallest mean outside diameter

**Tolerance symbol**    **Definition**

#### Width

<b>B, C</b>	Nominal width of inner ring and outer ring, respectively
<b>B<sub>s</sub>, C<sub>s</sub></b>	Single width of inner ring and outer ring, respectively
<b>B<sub>1s</sub>, C<sub>1s</sub></b>	Single width of inner ring and outer ring, respectively, of a bearing belonging to a matched set
<b>Δ<sub>Bs</sub>, Δ<sub>Cs</sub></b>	Deviation of single inner ring width or single outer ring width from the nominal ( $\Delta_{Bs} = B_s - B$ ; $\Delta_{Cs} = C_s - C$ )
<b>Δ<sub>B1s</sub>, Δ<sub>C1s</sub></b>	Deviation of single inner ring width or single outer ring width of a bearing belonging to a matched set from the nominal (not valid for universally matchable bearings) ( $\Delta_{B1s} = B_{1s} - B$ ; $\Delta_{C1s} = C_{1s} - C$ )
<b>V<sub>Bs</sub>, V<sub>Cs</sub></b>	Ring width variation; difference between the largest and smallest single widths of inner ring and of outer ring, respectively

#### Running accuracy

<b>K<sub>ia</sub>, K<sub>ea</sub></b>	Radial runout of inner ring and outer ring, respectively, of assembled bearing
<b>S<sub>d</sub></b>	Side face runout with reference to bore (of inner ring)
<b>S<sub>D</sub></b>	Outside inclination variation; variation in inclination of outside cylindrical surface to outer ring side face
<b>S<sub>ia</sub>, S<sub>ea</sub></b>	Axial runout of inner ring and outer ring, respectively, of assembled bearing

- the rotational speed of the shaft, for constant position arrangements
- temperature gradients between the inner ring, outer ring and balls
- different coefficient of thermal expansion for the shaft and housing materials compared to the bearing steel

If the bearings are mounted with zero interference on a steel shaft and in a thick-walled steel or cast iron housing, preload can be determined with sufficient accuracy from

$$G_m = f f_1 f_2 f_{HC} G_{A,B,C}$$

where

$G_m$  = preload in the mounted bearing set [N]

$G_{A,B,C}$  = built-in preload in the bearing set, prior to mounting (→ table 4) [N]

$f$  = a bearing factor dependent on the bearing series and size (→ table 6 on page 22)

$f_1$  = a correction factor dependent on the contact angle (→ table 7 on page 23)


$f_2$  = a correction factor dependent on the preload class (→ table 7 on page 23)

$f_{HC}$  = a correction factor for hybrid bearings (→ table 7 on page 23)



Table 4

Axial preload of universally matchable bearings and matched bearing pairs, prior to mounting, arranged back-to-back or face-to-face

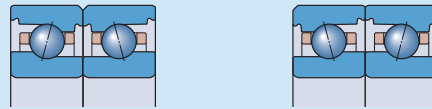

Bearing Bore diameter d	Size	Axial preload of bearings in the series <sup>1)</sup>			719 ACE (VEB CE3) 719 ACE/HC (VEB/NS CE3) for preload class			70 CE (VEX CE1) 70 CE/HC (VEX/NS CE1) for preload class			70 ACE (VEX CE3) 70 ACE/HC (VEX/NS CE3) for preload class		
		A	B	C	A	B	C	A	B	C	A	B	C
mm	–	N											
6	6	–	–	–	–	–	–	10	25	50	14	41	82
7	7	–	–	–	–	–	–	10	30	60	17	50	100
8	8	9	27	55	15	46	91	15	35	75	20	60	120
9	9	11	32	64	17	50	100	15	40	80	23	65	130
10	00	11	32	65	17	50	100	15	48	95	26	80	160
12	01	11	34	68	18	55	110	17	53	110	28	85	170
15	02	17	51	102	28	84	170	25	70	140	38	115	230
17	03	18	54	108	29	87	175	30	90	185	50	150	300
20	04	26	79	157	42	130	250	40	120	235	64	193	390
25	05	28	85	170	45	140	270	45	130	260	70	210	430
30	06	30	90	180	48	145	290	50	150	300	80	240	480
35	07	41	125	250	66	200	400	60	180	370	100	300	590
40	08	52	157	315	84	250	505	65	200	390	105	310	630
45	09	55	166	331	88	265	529	70	210	410	110	330	660
50	10	69	210	410	110	330	660	85	250	500	130	400	800
55	11	83	250	500	133	400	800	90	270	540	140	430	860
60	12	87	262	523	139	418	836	92	275	550	150	440	870
65	13	89	266	532	142	425	850	110	330	650	170	520	1 040
70	14	120	360	710	190	570	1 130	130	380	760	200	610	1 220
75	15	120	361	722	192	577	1 150	140	420	840	220	670	1 340
80	16	123	370	740	195	590	1 170	180	550	1 090	280	850	1 700
85	17	160	479	957	255	765	1 529	185	560	1 110	290	890	1 780
90	18	163	488	977	260	780	1 560	190	580	1 150	300	920	1 840
95	19	166	500	995	265	795	1 590	230	700	1 400	380	1 130	2 270
100	20	208	624	1 250	332	996	1 990	240	720	1 440	390	1 150	2 310
110	22	220	650	1 300	340	1 030	2 070	250	760	1 520	400	1 210	2 420
120	24	250	760	1 530	410	1 220	2 440	310	930	1 850	490	1 480	2 950

<sup>1)</sup> Data is also applicable to sealed bearings. Data for bearings with an 18° contact angle is available on request.

Table 5

Example of the (light) preload possibilities for an arrangement with a matched set of 7014 CE (VEX 70 CE1) bearings

Number of bearings	Arrangement	Preload of a matched set, prior to mounting for maximum rigidity		for maximum speed	
		Designation suffix	Preload	Designation suffix	Preload
		–	N	–	N
2	Back-to-back	DBA (DDL)	130	–	–
	Face-to-face	DFA (FFL)	130	–	–
3	Back-to-back and tandem	TBTA (TD17,5DaN)	175,5	TBTL (TDL)	130
	Face-to-face and tandem	TFTA (TF17,5DaN)	175,5	TFTL (TFL)	130
4	Tandem back-to-back	QBCA (TDTL)	260	–	–
	Tandem face-to-face	QFCA (TFTL)	260	–	–
	Back-to-back and tandem	QBTA (3TD20,8DaN)	208	QBTL (3TDL)	130
	Face-to-face and tandem	QFTA (3TF20,8DaN)	208	QFTL (3TFL)	130

Note: For symmetrical arrangements, preload class A = preload class L e.g. the designation suffix DBL does not exist.

Considerably tighter fits may be necessary, for example for very high speed spindles, where centrifugal forces can loosen the inner ring from its seat on the shaft. These bearing arrangements must be carefully evaluated.

### Preload with constant force

In precision, high-speed applications, a constant and uniform preload is important. To maintain the proper preload, calibrated linear springs can be used between one bearing outer ring and its housing shoulder (→ fig. 1). With springs, the kinematic behaviour of the bearing will not influence preload under normal operating conditions. Note, however, that a spring-loaded bearing arrangement has a lower degree of rigidity than an arrangement using axial displacement to set the preload.

Fig. 1

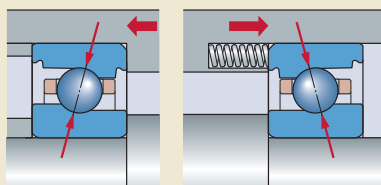


Table 6

Bearing factor f for calculating the preload in mounted bearing sets

Bearing Bore diameter d	Size	Bearing factor f for bearings in the series <sup>1)</sup>	
		719 .. E (VEB)	70 .. E (VEX)
mm	–	–	–
6	6	–	1,02
7	7	–	1,02
8	8	1,02	1,02
9	9	1,03	1,02
10	00	1,03	1,03
12	01	1,04	1,02
15	02	1,04	1,03
17	03	1,05	1,04
20	04	1,04	1,04
25	05	1,06	1,05
30	06	1,08	1,05
35	07	1,05	1,06
40	08	1,05	1,06
45	09	1,09	1,06
50	10	1,15	1,08
55	11	1,16	1,07
60	12	1,13	1,08
65	13	1,19	1,09
70	14	1,14	1,09
75	15	1,16	1,1
80	16	1,19	1,1
85	17	1,16	1,11
90	18	1,19	1,1
95	19	1,18	1,11
100	20	1,18	1,12
110	22	1,20	1,1
120	24	1,18	1,12

<sup>1)</sup> Data is also applicable to sealed bearings.

## Preload by axial displacement

Rigidity and precise axial guidance are critical parameters in bearing arrangements, especially when alternating axial forces occur. As a result, the preload in the bearings is usually obtained by adjusting the bearing rings relative to each other in the axial direction. This preload method offers significant benefits in terms of system rigidity. However, depending on the bearing series, contact angle and ball material, preload increases considerably with rotational speed.

Universally matchable bearings and matched bearing sets are manufactured so that when mounted properly, they will attain their predetermined axial displacement and consequently the proper preload. With single bearings, precision-matched spacer rings must be used.

## Adjusting preload with spacer rings

By placing precision-matched spacer rings between two bearings, it is possible to increase or decrease preload. Precision spacer rings can also be used to:

- increase system rigidity
- create a sufficiently large grease reservoir between two bearings
- create a space for oil-air lubrication nozzles

It is possible to adjust preload in a bearing set, by grinding the side face of the inner or outer spacer ring. **Table 8** provides information about which of the equal-width spacer ring side faces must be ground and what effect it will have. Guideline values for the requisite overall width reduction of the spacer rings are listed in **table 9** on **page 24**.

To achieve maximum bearing performance, the spacer rings must not deform

under load. They should be made of high-grade steel that can be hardened to between 45 and 60 HRC. Particular importance must be given to the plane parallelism of the side face surfaces, where the permissible shape deviation must not exceed 2 µm.

## Effect of rotational speed on preload

Using strain gauges, SKF has determined that there is a marked increase in preload at very high speeds. This is mainly attributable to the heavy centrifugal forces on the balls causing them to change their position within the bearing. When compared to an all-steel bearing, a hybrid bearing can attain much higher rotational speeds without significantly increasing preload. This is due to the lower mass of the balls.



Table 7

### Correction factors for calculating the preload in mounted bearing sets

Bearing series <sup>1)</sup>	Correction factors				f <sub>HC</sub>
	f <sub>1</sub>	f <sub>2</sub> for preload class			
		A	B	C	
719 CE (VEB CE1)	1	1	1,04	1,08	1
719 ACE (VEB CE3)	0,99	1	1,04	1,07	1
719 CE/HC (VEB /NS CE1)	1	1	1,05	1,09	1,01
719 ACE/HC (VEB /NS CE3)	0,98	1	1,04	1,08	1,01
70 CE (VEX CE1)	1	1	1,03	1,05	1
70 ACE (VEX CE3)	0,99	1	1,03	1,06	1
70 CE/HC (VEX /NS CE1)	1	1	1,03	1,05	1,01
70 ACE/HC (VEX /NS CE3)	0,99	1	1,03	1,06	1,01

<sup>1)</sup> Data is also applicable to sealed bearings. Data for bearings with an 18° contact angle is available on request.

Table 8

### Guidelines for spacer ring modification

Preload change of a bearing set	Width reduction Value	Requisite spacer ring	
		between bearings arranged back-to-back	face-to-face
<b>Increasing the preload</b>			
from A to B	a	inner	outer
from B to C	b	inner	outer
from A to C	a + b	inner	outer
<b>Decreasing the preload</b>			
from B to A	a	outer	inner
from C to B	b	outer	inner
from C to A	a + b	outer	inner

## Bearing axial stiffness

Axial stiffness depends on the deformation of the bearing under load and can be expressed as a ratio of the load to bearing resilience. However, since the relation between resilience and load is not linear, only guideline values can be provided (→ table 10). These values apply to mounted bearing pairs under static conditions and subjected to moderate loads.

Exact values can be calculated using advanced computer methods. For additional


information, contact the SKF application engineering service.

Bearing sets comprising three or four bearings can provide a higher degree of axial stiffness than sets with two bearings. The axial stiffness for these sets can be calculated by multiplying the values listed in table 10 by a factor dependent on the bearing arrangement and preload class of the bearings. For bearing sets produced to preload classes A, B or C, the following factors apply:

- 1,45 for TBT (TD) and TFT (TF) arrangements
- 1,8 for QBT (3TD) and QFT (3TF) arrangements
- 2 for QBC (TDT) and QFC (TFT) arrangements

Table 9

### Guideline values for spacer ring width reduction

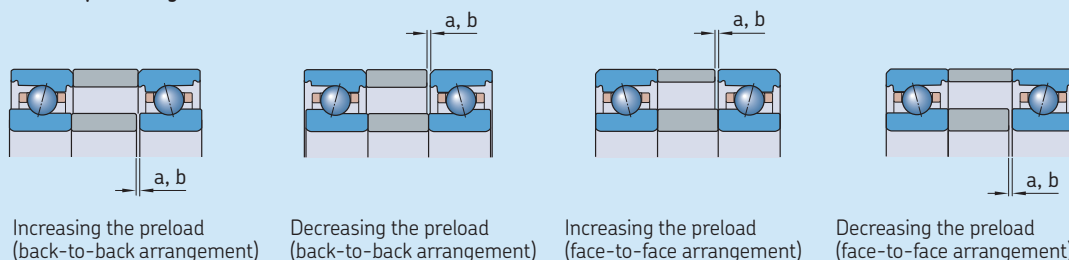

Bearing Bore diameter d	Size	Requisite spacer ring width reduction for bearings in the series <sup>1)</sup>							
		719 CE (VEB CE1)		719 ACE (VEB CE3)		70 CE (VEX CE1)		70 ACE (VEX CE3)	
		a	b	a	b	a	b	a	b
mm	–	µm							
6	6	–	–	–	–	6	7	5	5
7	7	–	–	–	–	8	8	5	6
8	8	7	8	5	5	8	10	6	6
9	9	7	8	5	5	8	10	6	6
10	00	7	8	5	5	9	10	6	6
12	01	7	8	5	5	9	10	6	6
15	02	8	9	6	6	9	10	6	11
17	03	9	9	6	6	11	12	7	11
20	04	10	10	7	7	13	13	8	11
25	05	10	10	7	7	13	13	8	11
30	06	10	10	7	7	13	13	8	11
35	07	11	11	7	8	13	15	9	11
40	08	12	13	8	9	13	15	9	11
45	09	12	13	8	9	13	15	9	11
50	10	14	14	9	10	14	15	9	11
55	11	15	16	9	11	14	15	9	11
60	12	15	16	9	11	14	15	9	11
65	13	15	16	9	11	15	16	10	11
70	14	17	19	11	12	16	17	10	11
75	15	17	19	11	13	16	17	10	11
80	16	17	19	11	13	18	19	12	13
85	17	20	22	13	14	18	19	12	13
90	18	20	22	13	14	18	19	12	13
95	19	20	22	13	15	20	22	13	15
100	20	22	25	14	16	20	22	13	15
110	22	22	25	14	16	20	22	13	15
120	24	25	28	16	18	22	24	14	16

<sup>1)</sup> Data is also applicable to sealed bearings. Data for bearings with an 18° contact angle is available on request.

Matched bearing sets that are asymmetrical can be produced to the additional preload classes L, M or F (→ *Preload in sets of universally matchable bearings and matched bearing sets prior to mounting, page 19*).


The axial stiffness for these bearing sets can be calculated by multiplying the values listed in **table 10** by the following factors:

- 1,25 for TBT (TD) and TFT (TF) arrangements
- 1,45 for QBT (3TD) and QFT (3TF) arrangements

For hybrid bearings, the axial stiffness can be calculated in the same way as for all-steel bearings. However, the calculated value should then be multiplied by a factor of 1,11 (for all arrangements and preload classes).

Table 10

Static axial stiffness for bearing pairs arranged back-to-back or face-to-face

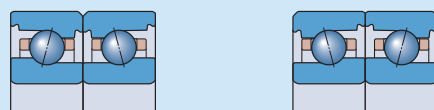

Bearing Bore diameter d	Size	Static axial stiffness of all-steel bearings in the series <sup>1)</sup>											
		719 CE (VEB CE1) for preload class			719 ACE (VEB CE3) for preload class			70 CE (VEX CE1) for preload class			70 ACE (VEX CE3) for preload class		
		A	B	C	A	B	C	A	B	C	A	B	C
mm	–	N/μm											
6	6	–	–	–	–	–	–	8	12	16	19	28	37
7	7	–	–	–	–	–	–	8	13	18	21	31	41
8	8	8	13	18	21	32	41	10	14	20	23	34	45
9	9	10	16	21	25	37	48	11	16	22	26	38	50
10	00	10	16	22	25	37	48	12	19	26	31	47	61
12	01	11	17	23	27	41	53	13	21	30	34	50	66
15	02	13	21	29	34	51	66	16	25	34	40	59	66
17	03	14	23	31	35	55	71	18	28	39	46	68	89
20	04	18	28	39	47	69	88	21	32	44	52	78	102
25	05	20	32	44	51	77	100	24	37	50	59	89	117
30	06	23	35	49	55	85	111	28	44	60	71	105	138
35	07	28	43	59	69	104	136	31	49	67	79	119	154
40	08	32	49	67	78	117	153	34	54	73	87	129	169
45	09	34	53	73	85	127	166	38	59	79	94	140	183
50	10	38	61	83	96	145	190	42	65	88	104	156	204
55	11	42	67	92	105	160	210	46	72	98	116	174	226
60	12	47	73	100	115	173	228	48	75	101	122	180	235
65	13	47	76	105	120	181	238	53	83	112	132	198	259
70	14	52	83	113	131	197	258	57	88	120	143	215	280
75	15	54	86	118	137	205	269	65	102	140	161	243	318
80	16	56	89	123	141	214	281	72	114	157	178	268	352
85	17	63	99	136	157	237	311	75	118	163	186	281	369
90	18	65	102	141	164	247	324	79	125	171	196	297	389
95	19	68	107	147	170	256	338	84	133	184	212	319	420
100	20	73	116	160	187	280	367	88	138	191	220	330	435
110	22	80	126	174	199	301	397	94	149	204	237	356	466
120	24	82	129	179	207	312	411	104	164	225	259	391	512

<sup>1)</sup> Data is also applicable to sealed bearings. Data for bearings with an 18° contact angle is available on request.



## Fitting and clamping bearing rings

Super-precision angular contact ball bearings are typically located axially on shafts or in housings with either precision lock nuts (→ fig. 2) or end caps. These components require high geometrical precision and good mechanical strength to provide reliable locking.

The tightening torque  $M_t$ , for precision lock nuts or end cap bolts, must be sufficient to prevent relative movement of adjacent components, maintain the position of the bearings without deformation, and minimize material fatigue.

## Calculating the tightening torque $M_t$

It is difficult to accurately calculate the tightening torque  $M_t$  for a precision lock nut or the bolts in an end cap. The following formulas can be used to do the calculations, but the results should be verified during operation.

The axial clamping force for a precision lock nut or the bolts in an end cap is

$$P_a = F_s + (N_{cp} F_c) + G_{A,B,C}$$

The tightening torque for a precision lock nut is

$$M_t = K P_a = K [F_s + (N_{cp} F_c) + G_{A,B,C}]$$

The tightening torque for end cap bolts is

$$M_t = \frac{K P_a}{N_b}$$

$$M_t = \frac{K [F_s + (N_{cp} F_c) + G_{A,B,C}]}{N_b}$$

where

$M_t$  = tightening torque [Nmm]

$P_a$  = axial clamping force [N]

$F_s$  = minimum axial clamping force (→ table 11) [N]

$F_c$  = axial fitting force (→ table 11) [N]

$G_{A,B,C}$  = built-in bearing preload, prior to mounting (→ table 4 on page 21) [N]

$N_{cp}$  = the number of preloaded bearings

$N_b$  = the number of end cap bolts

$K$  = a calculation factor dependent on the thread (→ table 12)

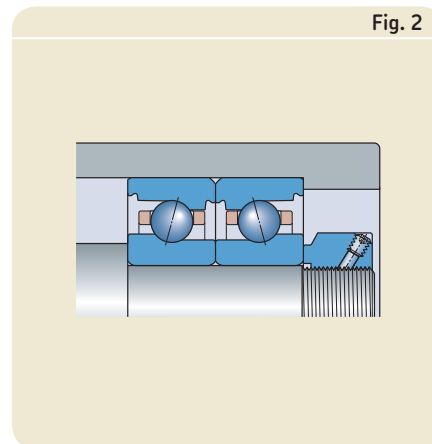


Fig. 2

Table 11

Minimum axial clamping force and axial fitting force for precision lock nuts and end caps

Bearing Bore diameter d	Size	Minimum axial clamping force for bearings in the series <sup>1)</sup>		Axial fitting force for bearings in the series <sup>1)</sup>	
		719 .. E (VEB) $F_s$	70 .. E (VEX)	719 .. E (VEB) $F_c$	70 .. E (VEX)
mm	–	N		N	
6	6	–	260	–	430
7	7	–	310	–	410
8	8	330	450	280	490
9	9	400	600	280	490
10	00	500	650	280	550
12	01	600	700	280	470
15	02	650	1 000	280	490
17	03	750	1 000	280	490
20	04	1 300	1 600	400	650
25	05	1 600	1 800	340	500
30	06	1 900	2 500	300	550
35	07	2 600	3 300	440	750
40	08	3 100	4 100	500	750
45	09	3 800	4 500	480	750
50	10	3 100	5 000	380	650
55	11	4 100	6 000	430	800
60	12	4 500	6 500	400	750
65	13	4 800	7 000	370	700
70	14	6 500	8 500	500	800
75	15	6 500	9 000	480	750
80	16	7 000	11 000	650	1 200
85	17	9 000	11 000	900	1 400
90	18	9 500	16 000	850	1 700
95	19	10 000	14 000	850	1 500
100	20	12 000	15 000	1 000	1 400
110	22	13 000	20 000	900	1 800
120	24	16 000	22 000	1 200	1 900

<sup>1)</sup> Data is also applicable to sealed bearings.

## Load carrying capacity of bearing sets

The values listed in the product tables for the basic dynamic load rating  $C$ , the basic static load rating  $C_0$  and the fatigue load limit  $P_u$  apply to single bearings. For bearing sets, the values for single bearings should be multiplied by a calculation factor according to **table 13**.

## Equivalent bearing loads

When determining the equivalent bearing load for preloaded bearings, the preload must be taken into account. Depending on the operating conditions, the requisite axial component of the bearing load  $F_a$  for a bearing pair arranged back-to-back or face-to-face can be approximated using the following equations.

For bearing pairs under radial load and mounted with an interference fit

$$F_a = G_m$$

For bearing pairs under radial load and preloaded by springs

$$F_a = G_{A,B,C}$$

For bearing pairs under axial load and mounted with an interference fit

$$F_a = G_m + 0,67 K_a \quad \text{for } K_a \leq 3 G_m$$

$$F_a = K_a \quad \text{for } K_a > 3 G_m$$

For bearing pairs under axial load and preloaded by springs

$$F_a = G_{A,B,C} + K_a$$

where

$F_a$  = axial component of the load [N]

$G_{A,B,C}$  = built-in preload of the bearing pair, prior to mounting (→ **table 4** on **page 21**) [N]

$G_m$  = preload in the mounted bearing pair (→ *Preload in mounted bearing sets*, **page 20**) [N]

$K_a$  = external axial force acting on a single bearing [N]

**Table 12**

Factor K for calculating the tightening torque

Nominal thread diameter <sup>1)</sup>	Factor K for precision lock nuts	end cap bolts
–	–	–
M 4	–	0,8
M 5	–	1
M 6	–	1,2
M 8	–	1,6
M 10	1,4	2
M 12	1,6	2,4
M 14	1,9	2,7
M 15	2	2,9
M 16	2,1	3,1
M 17	2,2	–
M 20	2,6	–
M 25	3,2	–
M 30	3,9	–
M 35	4,5	–
M 40	5,1	–
M 45	5,8	–
M 50	6,4	–
M 55	7	–
M 60	7,6	–
M 65	8,1	–
M 70	9	–
M 75	9,6	–
M 80	10	–
M 85	11	–
M 90	11	–
M 95	12	–
M 100	12	–
M 105	13	–
M 110	14	–
M 120	15	–

<sup>1)</sup> Applicable for fine threads only

**Table 13**

Calculation factors for load carrying capacities of bearing sets

Number of bearings	Calculation factor for		
	C	$C_0$	$P_u$
2	1,62	2	2
3	2,16	3	3
4	2,64	4	4

### Equivalent dynamic bearing load

For single bearings and bearings paired in tandem

$$P = F_r \quad \text{for } F_a/F_r \leq e$$

$$P = XF_r + YF_a \quad \text{for } F_a/F_r > e$$

For bearing pairs, arranged back-to-back or face-to-face

$$P = F_r + Y_1F_a \quad \text{for } F_a/F_r \leq e$$

$$P = XF_r + Y_2F_a \quad \text{for } F_a/F_r > e$$

where

$P$  = equivalent dynamic load of the bearing set [kN]

$F_r$  = radial component of the load acting on the bearing set [kN]

$F_a$  = axial component of the load acting on the bearing set [kN]

The values for the calculation factors  $e$ ,  $X$ ,  $Y$ ,  $Y_1$  and  $Y_2$  depend on the bearing contact angle and are listed in **tables 14** and **15**. For bearings with a 15° contact angle, the factors also depend on the relationship  $f_0F_a/C_0$  where  $f_0$  is the calculation factor and  $C_0$  is the basic static load rating, both of which are listed in the product tables.

### Equivalent static bearing load

For single bearings and bearings paired in tandem

$$P_0 = 0,5 F_r + Y_0F_a$$

For bearing pairs, arranged back-to-back or face-to-face

$$P_0 = F_r + Y_0F_a$$

where

$P_0$  = equivalent static load of the bearing set [kN]

$F_r$  = radial component of the load acting on the bearing set [kN]

$F_a$  = axial component of the load acting on the bearing set [kN]

If  $P_0 < F_r$ ,  $P_0 = F_r$  should be used. The values for the calculation factor  $Y_0$  depend on the bearing contact angle and are listed in **tables 14** and **15**.

Table 14

#### Calculation factors for single bearings and bearings paired in tandem

$f_0F_a/C_0$	Calculation factors			
	$e$	$X$	$Y$	$Y_0$
<b>For 15° contact angle</b> designation suffix CE (1)				
$\leq 0,178$	0,38	0,44	1,47	0,46
0,357	0,4	0,44	1,4	0,46
0,714	0,43	0,44	1,3	0,46
1,07	0,46	0,44	1,23	0,46
1,43	0,47	0,44	1,19	0,46
2,14	0,5	0,44	1,12	0,46
3,57	0,55	0,44	1,02	0,46
$\geq 5,35$	0,56	0,44	1	0,46
<b>For 25° contact angle</b> designation suffix ACE (3)				
—	0,68	0,41	0,87	0,38

Note: Data for bearings with an 18° contact angle is available on request.

Table 15

#### Calculation factors for bearing pairs arranged back-to-back or face-to-face

$2 f_0F_a/C_0$	Calculation factors				
	$e$	$X$	$Y_1$	$Y_2$	$Y_0$
<b>For 15° contact angle</b> designation suffix CE (1)					
$\leq 0,178$	0,38	0,72	1,65	2,39	0,92
0,357	0,4	0,72	1,57	2,28	0,92
0,714	0,43	0,72	1,46	2,11	0,92
1,07	0,46	0,72	1,38	2	0,92
1,43	0,47	0,72	1,34	1,93	0,92
2,14	0,5	0,72	1,26	1,82	0,92
3,57	0,55	0,72	1,14	1,66	0,92
$\geq 5,35$	0,56	0,72	1,12	1,63	0,92
<b>For 25° contact angle</b> designation suffix ACE (3)					
—	0,68	0,67	0,92	1,41	0,76

Note: Data for bearings with an 18° contact angle is available on request.

### Attainable speeds

The attainable speeds listed in the product tables should be regarded as guideline values. They are valid for single bearings under light load ( $P \leq 0,05 C$ ) that are lightly preloaded with springs. In addition, good heat dissipation from the bearing arrangement is a prerequisite. As there is no friction generated at the seal lip, the attainable speed of a sealed bearing is equivalent to a comparably sized open bearing.

The values provided for oil lubrication apply to the oil-air lubrication method and should be reduced if other oil lubrication methods are used. The values provided for grease lubrication are maximum values that can be attained with sealed bearings or open bearings with good lubricating grease that has a low consistency and low viscosity. Sealed bearings in the S719 .. E (VEB .. /S) and S70 .. E (VEX .. /S) series are designed for high-speed operation i.e. for a speed factor A up to approximately 2 000 000 mm/min.

If single bearings are adjusted against each other with heavier preload or if bearing sets are used, the attainable speeds listed in the product tables should be reduced, i.e. the values should be multiplied by a reduction factor. Values for this reduction factor, which depend on the bearing arrangement and preload class, are listed in **table 16**.

If the rotational speed obtained is not sufficient for the application, precision-matched spacer rings in the bearing set can be used to increase the speed capability.

## Cage

Bearings in the 719 .. E (VEB) and 70 .. E (VEX) series have a one-piece outer ring shoulder-guided cage made of fabric reinforced phenolic resin (→ fig. 3) that can withstand temperatures up to 120 °C.

## Seals

The integral seals in sealed S719 .. E (VEB .. /S) and S70 .. E (VEX .. /S) series bearings are designed for a speed factor A up to approximately 2 000 000 mm/min. The permissible operating temperature range of the seals is –25 to +100 °C and up to 120 °C for brief periods.

## Materials

The rings and balls of all-steel bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are made from SKF Grade 3 steel, in accordance with ISO 683-17:1999. Balls of hybrid bearings are made of bearing grade silicon nitride Si<sub>3</sub>N<sub>4</sub>. The rings of sealed hybrid bearings, designation prefix SV (suffix /S/XN), are made from NitroMax, a high-nitrogen stainless steel.

The integral seals in sealed bearings are made of an oil- and wear-resistant acrylonitrile-butadiene rubber (NBR) and are reinforced with sheet steel. The O-rings of bearings for direct oil lubrication with a designation suffix L (GH) and L1 (G1), are also made of acrylonitrile-butadiene rubber.

## Heat treatment

All SKF super-precision bearings undergo a special heat treatment to achieve a good balance between hardness and dimensional stability. The hardness of the rings and rolling elements is optimized for wear-resistance.



Fig. 3



Table 16

### Speed reduction factors for bearing sets

Number of bearings	Arrangement	Designation suffix for matched sets	Speed reduction factor for preload class					
			A	L	B	M	C	F
2	Back-to-back	DB (DD)	0,8	–	0,65	–	0,4	–
	Face-to-face	DF (FF)	0,77	–	0,61	–	0,36	–
3	Back-to-back and tandem	TBT (TD)	0,69	0,72	0,49	0,58	0,25	0,36
	Face-to-face and tandem	TFT (TF)	0,63	0,66	0,42	0,49	0,17	0,24
4	Tandem back-to-back	QBC (TDT)	0,64	–	0,53	–	0,32	–
	Tandem face-to-face	QFC (TFT)	0,62	–	0,48	–	0,27	–

Note: For spring-loaded tandem sets, designation suffix DT (T), a speed reduction factor of 0,9 should be applied.

## Marking of bearings and bearing sets

Each SKF bearing in the 719 .. E (VEB) and 70 .. E (VEX) series has various markings on the external surfaces of the rings (→ **fig. 4**):

- 1 SKF trademark
- 2 Complete designation of the bearing
- 3 Country of manufacture
- 4 Date of manufacture, coded
- 5 Deviation of the mean outside diameter  $\Delta_{Dm}$  [μm] and position of the maximum eccentricity of the outer ring
- 6 Deviation of the mean bore diameter  $\Delta_{dm}$  [μm] and position of the maximum eccentricity of the inner ring
- 7 Thrust face mark, punched
- 8 Serial number (bearing sets only)
- 9 "V-shaped" marking (matched bearing sets only)

Sealed bearings are marked in a similar way.

## "V-shaped" marking

A "V-shaped" marking on the outside surface of the outer rings of matched bearing sets indicates how the bearings should be mounted to obtain the proper preload in the set. The marking also indicates how the bearing set should be mounted in relation to the axial load. The "V-shaped" marking should point in the direction in which the axial load will act on the inner ring (→ **fig. 5**). In applications where there are axial loads in both directions, the "V-shaped" marking should point toward the greater of the two loads.

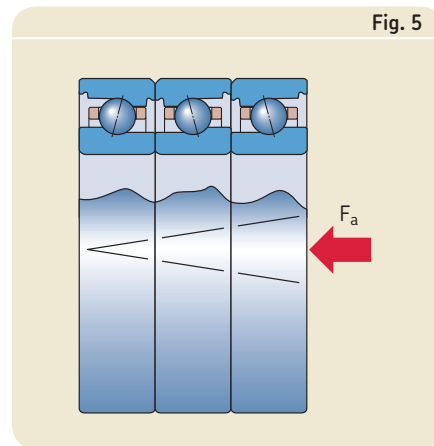


Fig. 5

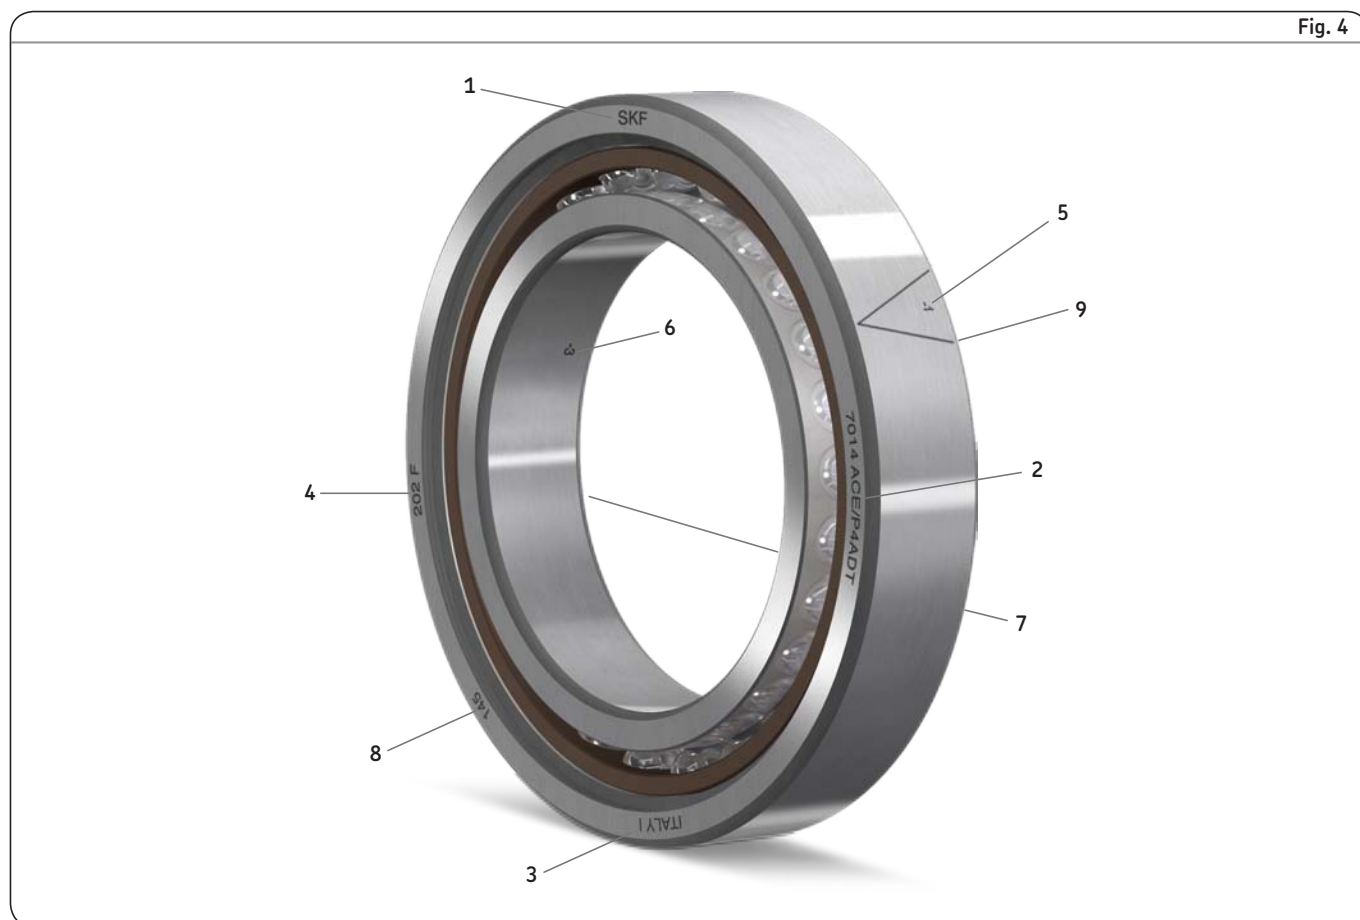


Fig. 4

## Packaging

Super-precision bearings are distributed in new SKF illustrated boxes (→ **fig. 6**). An instruction sheet, with information about mounting bearing sets, is supplied in each box.

## Designation system

The designations for SKF bearings in the 719 .. E (VEB) and 70 .. E (VEX) series are provided in **table 17** on **page 32** together with their definitions.



Fig. 6



## Designation system for SKF super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series

Single bearing: S7014 CEGB/PA9A	S	70	14	CE	GB	/		PA9A			
	Variant prefix	Series	Size	Contact angle and design	Execution and preload (single bearing)		Ball material	Tolerance class	Lubrication feature	Arrangement	Preload
Matched bearing set: 71910 ACE/HCP4AH1QBCA		719	10	ACE		/	HC	P4A	H1	QBC	A

**Variant (prefix)**

- Open bearing (no designation prefix)
- S Sealed bearing
- V Bearing with NitroMax steel rings and bearing grade silicon nitride Si<sub>3</sub>N<sub>4</sub> balls (hybrid bearings)

**Bearing series**

- 719 In accordance with ISO dimension series 19
- 70 In accordance with ISO dimension series 10

**Bearing size**

- 6 6 mm bore diameter<sup>1)</sup>
- 7 7 mm bore diameter<sup>1)</sup>
- 8 8 mm bore diameter
- 9 9 mm bore diameter
- 00 10 mm bore diameter
- 01 12 mm bore diameter
- 02 15 mm bore diameter
- 03 17 mm bore diameter
- 04 (x5) 20 mm bore diameter
- to
- 24 (x5) 120 mm bore diameter

**Contact angle and internal design**

- CE 15° contact angle, high-speed E design
- FE 18° contact angle, high-speed E design
- ACE 25° contact angle, high-speed E design

**Single bearing – execution and preload**

- Single bearing (no designation suffix)
- GA Single, universally matchable, for light preload
- GB Single, universally matchable, for moderate preload
- GC Single, universally matchable, for heavy preload

**Cage**

- Fabric reinforced phenolic resin, outer ring centred (no designation suffix)

**Ball material**

- Carbon chromium steel (no designation suffix)
- HC Bearing grade silicon nitride Si<sub>3</sub>N<sub>4</sub> (hybrid bearings)

**Tolerance class**

- P4A Dimensional accuracy in accordance with ISO tolerance class 4, running accuracy better than ISO tolerance class 4
- PA9A Dimensional and running accuracy better than ABMA tolerance class ABEC 9

**Lubrication feature**

- H Two lubrication holes in the outer ring for direct oil lubrication
- H1 Two lubrication holes in the outer ring (optimized position) for direct oil lubrication
- L Annular groove with two lubrication holes and two annular grooves fitted with O-rings in the outer ring for direct oil lubrication
- L1 Annular groove with two lubrication holes and two annular grooves fitted with O-rings in the outer ring (optimized position) for direct oil lubrication

**Bearing set – arrangement**

- DB Two bearings arranged back-to-back <>
- DF Two bearings arranged face-to-face ><
- DT Two bearings arranged in tandem <<
- DG Two bearings for universal matching
- TBT Three bearings arranged back-to-back and tandem <>>
- TFT Three bearings arranged face-to-face and tandem ><<
- TT Three bearings arranged in tandem <<<
- TG Three bearings for universal matching
- QBC Four bearings arranged tandem back-to-back <<>>
- QFC Four bearings arranged tandem face-to-face >><<
- QBT Four bearings arranged back-to-back and tandem <>>>
- QFT Four bearings arranged face-to-face and tandem ><<<
- QT Four bearings arranged in tandem <<<<
- QG Four bearings for universal matching

**Bearing set – preload**

- A Light preload
- L Light preload (only for asymmetrical matched bearing sets in TBT, TFT, QBT and QFT arrangements)
- B Moderate preload
- M Moderate preload (only for asymmetrical matched bearing sets in TBT, TFT, QBT and QFT arrangements)
- C Heavy preload
- F Heavy preload (only for asymmetrical matched bearing sets in TBT, TFT, QBT and QFT arrangements)
- G... Special preload, expressed in daN e.g. G240

<sup>1)</sup> Bearings in the 719 .. E (VEB) series are only available for bore diameters starting at d = 8 mm.

<sup>2)</sup> For additional information, contact the SKF application engineering service.

Table 17

Former SNFA designation system for super-precision angular contact ball bearings in the 719 .. E (VEB) and 70 .. E (VEX) series

Single bearing: VEX 70/S 9CE1 UM	VEX	70	/S	9	CE	1	U	M
	Series and design	Size	Variant	Tolerance class	Cage	Contact angle	Arrangement	Preload
Matched bearing set: VEB 50/NS/H1 7CE3 TDTL	VEB	50	/NS/H1	7	CE	3	TDT	L

**Bearing series and internal design**

VEB In accordance with ISO dimension series 19, high-speed VEB design

VEX In accordance with ISO dimension series 10, high-speed VEX design

**Bearing size**6 6 mm bore diameter<sup>1)</sup>

to

120 120 mm bore diameter

**Variant**

– Open bearing (no designation suffix)

/S Sealed bearing

– Carbon chromium steel balls (no designation suffix)

/NS Bearing grade silicon nitride Si<sub>3</sub>N<sub>4</sub> balls (hybrid bearings)/XN Bearing with NitroMax steel rings and bearing grade silicon nitride Si<sub>3</sub>N<sub>4</sub> balls (hybrid bearings)

H Two lubrication holes in the outer ring for direct oil lubrication

H1 Two lubrication holes in the outer ring (optimized position) for direct oil lubrication

GH Annular groove with two lubrication holes and two annular grooves fitted with O-rings in the outer ring for direct oil lubrication

G1 Annular groove with two lubrication holes and two annular grooves fitted with O-rings in the outer ring (optimized position) for direct oil lubrication

**Tolerance class**

7 Dimensional and running accuracy in accordance with ABMA tolerance class ABEC 7

9 Dimensional and running accuracy in accordance with ABMA tolerance class ABEC 9

**Cage**

CE Fabric reinforced phenolic resin, outer ring centred

**Contact angle**

1 15° contact angle

2 18° contact angle

3 25° contact angle

**Single bearing – execution and preload**

– Single bearing (no designation suffix)

UL Single, universally matchable, for light preload

UM Single, universally matchable, for moderate preload

UF Single, universally matchable, for heavy preload

**Bearing set – arrangement**

DD Two bearings arranged back-to-back &lt;&gt;

FF Two bearings arranged face-to-face &gt;&lt;

T Two bearings arranged in tandem &lt;&lt;

DU Two bearings for universal matching

TD Three bearings arranged back-to-back and tandem &lt;&gt;&gt;

TF Three bearings arranged face-to-face and tandem &gt;&lt;&lt;

3T Three bearings arranged in tandem &lt;&lt;&lt;

TU Three bearings for universal matching

TDT Four bearings arranged tandem back-to-back &lt;&lt;&gt;&gt;

TFT Four bearings arranged tandem face-to-face &gt;&gt;&lt;&lt;

3TD Four bearings arranged back-to-back and tandem &lt;&gt;&gt;&gt;

3TF Four bearings arranged face-to-face and tandem &gt;&gt;&lt;&lt;&lt;

4T Four bearings arranged in tandem &lt;&lt;&lt;&lt;

4U Four bearings for universal matching

**Bearing set – preload**

L Light preload (for symmetrical sets only)


M Moderate preload (for symmetrical sets only)

F Heavy preload (for symmetrical sets only)

..daN Special preload (for asymmetrical sets TD, TF, 3TD, 3TF and for special preload executions)<sup>2)</sup>

Super-precision angular contact ball bearings


d 6 – 12 mm

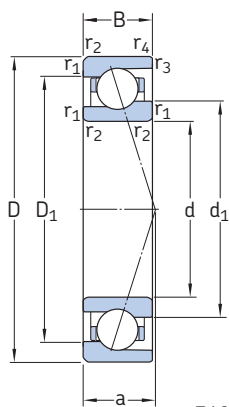

Open variant 719 .. E (VEB) series



Sealed variant for d = 20 to 120 mm

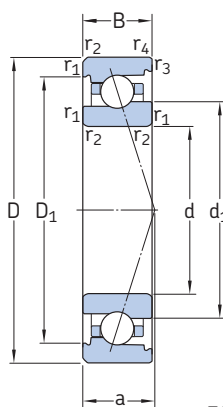

Open variant 70 .. E (VEX) series





Sealed variant for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	C	C <sub>0</sub>			P <sub>u</sub>	f <sub>0</sub>		when lubricating with grease	oil-air <sup>1)</sup>
mm			kN		kN	-	r/min		kg	-	
6	17	6	1,56	0,5	0,022	6,4	140 000	220 000	0,006	706 CE/P4A	VEX 6 7CE1
	17	6	1,56	0,5	0,022	6,4	170 000	260 000	0,005	706 CE/HCP4A	VEX 6 /NS 7CE1
	17	6	1,51	0,49	0,02	-	127 000	195 000	0,006	706 ACE/P4A	VEX 6 7CE3
	17	6	1,51	0,49	0,02	-	150 000	230 000	0,005	706 ACE/HCP4A	VEX 6 /NS 7CE3
7	19	6	1,95	0,64	0,027	6,5	127 000	190 000	0,007	707 CE/P4A	VEX 7 7CE1
	19	6	1,95	0,64	0,027	6,5	150 000	230 000	0,006	707 CE/HCP4A	VEX 7 /NS 7CE1
	19	6	1,86	0,62	0,026	-	112 000	175 000	0,007	707 ACE/P4A	VEX 7 7CE3
	19	6	1,86	0,62	0,026	-	133 000	205 000	0,006	707 ACE/HCP4A	VEX 7 /NS 7CE3
8	19	6	1,74	0,63	0,027	7,2	120 000	185 000	0,007	719/8 CE/P4A	VEB 8 7CE1
	19	6	1,74	0,63	0,027	7,2	145 000	220 000	0,006	719/8 CE/HCP4A	VEB 8 /NS 7CE1
	19	6	1,68	0,6	0,026	-	109 000	165 000	0,007	719/8 ACE/P4A	VEB 8 7CE3
	19	6	1,68	0,6	0,026	-	130 000	200 000	0,006	719/8 ACE/HCP4A	VEB 8 /NS 7CE3
	22	7	2,34	0,8	0,034	6,6	109 000	165 000	0,012	708 CE/P4A	VEX 8 7CE1
	22	7	2,34	0,8	0,034	6,6	130 000	200 000	0,011	708 CE/HCP4A	VEX 8 /NS 7CE1
	22	7	2,29	0,77	0,032	-	98 000	150 000	0,012	708 ACE/P4A	VEX 8 7CE3
	22	7	2,29	0,77	0,032	-	115 000	180 000	0,011	708 ACE/HCP4A	VEX 8 /NS 7CE3
9	20	6	2,03	0,8	0,034	7,4	109 000	165 000	0,008	719/9 CE/P4A	VEB 9 7CE1
	20	6	2,03	0,8	0,034	7,4	133 000	200 000	0,007	719/9 CE/HCP4A	VEB 9 /NS 7CE1
	20	6	1,95	0,77	0,032	-	100 000	150 000	0,008	719/9 ACE/P4A	VEB 9 7CE3
	20	6	1,95	0,77	0,032	-	120 000	180 000	0,007	719/9 ACE/HCP4A	VEB 9 /NS 7CE3
	24	7	2,6	0,93	0,04	6,8	98 000	150 000	0,014	709 CE/P4A	VEX 9 7CE1
	24	7	2,6	0,93	0,04	6,8	120 000	180 000	0,013	709 CE/HCP4A	VEX 9 /NS 7CE1
	24	7	2,51	0,9	0,038	-	90 000	137 000	0,014	709 ACE/P4A	VEX 9 7CE3
	24	7	2,51	0,9	0,038	-	106 000	165 000	0,013	709 ACE/HCP4A	VEX 9 /NS 7CE3
10	22	6	2,03	0,82	0,034	7,6	100 000	155 000	0,009	71900 CE/P4A	VEB 10 7CE1
	22	6	2,03	0,82	0,034	7,6	123 000	185 000	0,008	71900 CE/HCP4A	VEB 10 /NS 7CE1
	22	6	1,95	0,78	0,032	-	93 000	140 000	0,009	71900 ACE/P4A	VEB 10 7CE3
	22	6	1,95	0,78	0,032	-	109 000	165 000	0,008	71900 ACE/HCP4A	VEB 10 /NS 7CE3
	26	8	3,02	1,18	0,05	7,1	90 000	140 000	0,019	7000 CE/P4A	VEX 10 7CE1
	26	8	3,02	1,18	0,05	7,1	109 000	165 000	0,017	7000 CE/HCP4A	VEX 10 /NS 7CE1
	26	8	2,86	1,14	0,048	-	83 000	127 000	0,019	7000 ACE/P4A	VEX 10 7CE3
	26	8	2,86	1,14	0,048	-	98 000	150 000	0,017	7000 ACE/HCP4A	VEX 10 /NS 7CE3
12	24	6	2,12	0,92	0,039	7,8	90 000	137 000	0,010	71901 CE/P4A	VEB 12 7CE1
	24	6	2,12	0,92	0,039	7,8	109 000	165 000	0,009	71901 CE/HCP4A	VEB 12 /NS 7CE1
	24	6	2,03	0,87	0,036	-	83 000	123 000	0,010	71901 ACE/P4A	VEB 12 7CE3
	24	6	2,03	0,87	0,036	-	98 000	150 000	0,009	71901 ACE/HCP4A	VEB 12 /NS 7CE3
	28	8	3,19	1,34	0,057	7,3	80 000	127 000	0,021	7001 CE/P4A	VEX 12 7CE1
	28	8	3,19	1,34	0,057	7,3	98 000	150 000	0,019	7001 CE/HCP4A	VEX 12 /NS 7CE1
	28	8	3,07	1,27	0,054	-	73 000	112 000	0,021	7001 ACE/P4A	VEX 12 7CE3
	28	8	3,07	1,27	0,054	-	88 000	133 000	0,019	7001 ACE/HCP4A	VEX 12 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only

<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

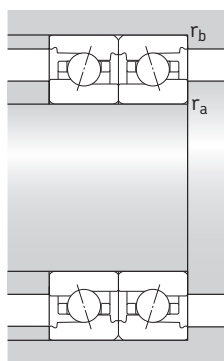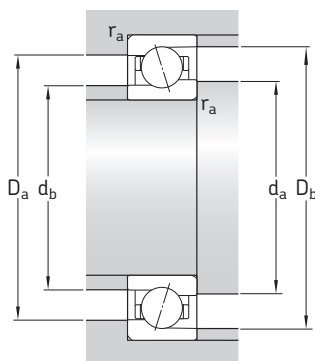


**Dimensions**

**Abutment and fillet dimensions**

d	d <sub>1</sub>	D <sub>1</sub>	r <sub>1,2</sub> min	r <sub>3,4</sub> min	a	d <sub>a,d_b</sub> min	D <sub>a</sub> max	D <sub>b</sub> max	r <sub>a</sub> max	r <sub>b</sub> max
mm						mm				
<b>6</b>	9,2	13,9	0,3	0,15	5	8	15	15,6	0,3	0,15
	9,2	13,9	0,3	0,15	5	8	15	15,6	0,3	0,15
	9,2	13,9	0,3	0,15	6	8	15	15,6	0,3	0,15
	9,2	13,9	0,3	0,15	6	8	15	15,6	0,3	0,15
<b>7</b>	10,4	15,7	0,3	0,15	5	9	17	17,6	0,3	0,15
	10,4	15,7	0,3	0,15	5	9	17	17,6	0,3	0,15
	10,4	15,7	0,3	0,15	6	9	17	17,6	0,3	0,15
	10,4	15,7	0,3	0,15	6	9	17	17,6	0,3	0,15
<b>8</b>	11,3	15,7	0,3	0,15	5	10	17	17,6	0,3	0,15
	11,3	15,7	0,3	0,15	5	10	17	17,6	0,3	0,15
	11,3	15,7	0,3	0,15	7	10	17	17,6	0,3	0,15
	11,3	15,7	0,3	0,15	7	10	17	17,6	0,3	0,15
	12,1	17,9	0,3	0,15	6	10	20	20,6	0,3	0,15
	12,1	17,9	0,3	0,15	6	10	20	20,6	0,3	0,15
	12,1	17,9	0,3	0,15	7	10	20	20,6	0,3	0,15
	12,1	17,9	0,3	0,15	7	10	20	20,6	0,3	0,15
<b>9</b>	12,5	16,5	0,3	0,15	5	11	18	18,6	0,3	0,15
	12,5	16,5	0,3	0,15	5	11	18	18,6	0,3	0,15
	12,5	16,5	0,3	0,15	7	11	18	18,6	0,3	0,15
	12,5	16,5	0,3	0,15	7	11	18	18,6	0,3	0,15
	13,6	19,4	0,3	0,15	6	11	22	22,6	0,3	0,15
	13,6	19,4	0,3	0,15	6	11	22	22,6	0,3	0,15
	13,6	19,4	0,3	0,15	7	11	22	22,6	0,3	0,15
	13,6	19,4	0,3	0,15	7	11	22	22,6	0,3	0,15
<b>10</b>	14	17,9	0,3	0,15	5	12	20	20,6	0,3	0,15
	14	17,9	0,3	0,15	5	12	20	20,6	0,3	0,15
	14	17,9	0,3	0,15	7	12	20	20,6	0,3	0,15
	14	17,9	0,3	0,15	7	12	20	20,6	0,3	0,15
	15,6	22,4	0,3	0,3	6	12	24	24,6	0,3	0,15
	15,6	22,4	0,3	0,3	6	12	24	24,6	0,3	0,15
	15,6	22,4	0,3	0,3	8	12	24	24,6	0,3	0,15
	15,6	22,4	0,3	0,3	8	12	24	24,6	0,3	0,15
<b>12</b>	16	20	0,3	0,15	6	14	22	22,6	0,3	0,15
	16	20	0,3	0,15	6	14	22	22,6	0,3	0,15
	16	20	0,3	0,15	8	14	22	22,6	0,3	0,15
	16	20	0,3	0,15	8	14	22	22,6	0,3	0,15
	17,5	24,4	0,3	0,15	7	14	26	26,6	0,3	0,15
	17,5	24,4	0,3	0,15	7	14	26	26,6	0,3	0,15
	17,5	24,4	0,3	0,15	9	14	26	26,6	0,3	0,15
	17,5	24,4	0,3	0,15	9	14	26	26,6	0,3	0,15

Super-precision angular contact ball bearings


d 15 – 30 mm

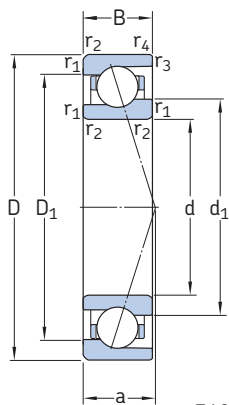

Open variant 719 .. E (VEB) series



Sealed variant for d = 20 to 120 mm

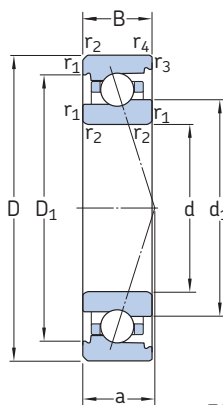



Open variant 70 .. E (VEX) series



Sealed variant for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	C	C <sub>0</sub>			P <sub>u</sub>	f <sub>0</sub>		when lubricating with grease	oil-air <sup>1)</sup>
mm			kN		kN	-	r/min	kg		-	
15	28	7	3,19	1,4	0,06	7,7	75 000	115 000	0,015	71902 CE/P4A	VEB 15 7CE1
	28	7	3,19	1,4	0,06	7,7	90 000	140 000	0,013	71902 CE/HCP4A	VEB 15 /NS 7CE1
	28	7	3,02	1,34	0,057	-	68 000	106 000	0,015	71902 ACE/P4A	VEB 15 7CE3
	28	7	3,02	1,34	0,057	-	83 000	127 000	0,013	71902 ACE/HCP4A	VEB 15 /NS 7CE3
	32	9	4,42	1,93	0,08	7,3	68 000	106 000	0,028	7002 CE/P4A	VEX 15 7CE1
	32	9	4,42	1,93	0,08	7,3	83 000	127 000	0,025	7002 CE/HCP4A	VEX 15 /NS 7CE1
	32	9	4,23	1,83	0,078	-	63 000	95 000	0,028	7002 ACE/P4A	VEX 15 7CE3
	32	9	4,23	1,83	0,078	-	75 000	115 000	0,025	7002 ACE/HCP4A	VEX 15 /NS 7CE3
17	30	7	3,32	1,56	0,067	7,9	70 000	106 000	0,016	71903 CE/P4A	VEB 17 7CE1
	30	7	3,32	1,56	0,067	7,9	83 000	127 000	0,014	71903 CE/HCP4A	VEB 17 /NS 7CE1
	30	7	3,19	1,46	0,063	-	63 000	95 000	0,016	71903 ACE/P4A	VEB 17 7CE3
	30	7	3,19	1,46	0,063	-	75 000	115 000	0,014	71903 ACE/HCP4A	VEB 17 /NS 7CE3
	35	10	5,85	2,55	0,108	7,2	63 000	95 000	0,035	7003 CE/P4A	VEX 17 7CE1
	35	10	5,85	2,55	0,108	7,2	75 000	115 000	0,030	7003 CE/HCP4A	VEX 17 /NS 7CE1
	35	10	5,59	2,45	0,104	-	56 000	88 000	0,035	7003 ACE/P4A	VEX 17 7CE3
	35	10	5,59	2,45	0,104	-	68 000	103 000	0,030	7003 ACE/HCP4A	VEX 17 /NS 7CE3
20	37	9	4,88	2,4	0,102	7,8	56 000	88 000	0,036	71904 CE/P4A	VEB 20 7CE1
	37	9	4,88	2,4	0,102	7,8	68 000	106 000	0,032	71904 CE/HCP4A	VEB 20 /NS 7CE1
	37	9	4,68	2,28	0,098	-	52 000	78 000	0,036	71904 ACE/P4A	VEB 20 7CE3
	37	9	4,68	2,28	0,098	-	60 000	95 000	0,032	71904 ACE/HCP4A	VEB 20 /NS 7CE3
	42	12	7,41	3,35	0,143	7,2	54 000	83 000	0,064	7004 CE/P4A	VEX 20 7CE1
	42	12	7,41	3,35	0,143	7,2	65 000	100 000	0,056	7004 CE/HCP4A	VEX 20 /NS 7CE1
	42	12	7,15	3,25	0,137	-	48 000	75 000	0,064	7004 ACE/P4A	VEX 20 7CE3
	42	12	7,15	3,25	0,137	-	58 000	88 000	0,056	7004 ACE/HCP4A	VEX 20 /NS 7CE3
25	42	9	5,27	2,85	0,12	8,1	49 000	75 000	0,040	71905 CE/P4A	VEB 25 7CE1
	42	9	5,27	2,85	0,12	8,1	58 000	90 000	0,036	71905 CE/HCP4A	VEB 25 /NS 7CE1
	42	9	4,94	2,7	0,114	-	44 000	68 000	0,040	71905 ACE/P4A	VEB 25 7CE3
	42	9	4,94	2,7	0,114	-	52 000	83 000	0,036	71905 ACE/HCP4A	VEB 25 /NS 7CE3
	47	12	8,32	4,15	0,173	7,5	46 000	70 000	0,074	7005 CE/P4A	VEX 25 7CE1
	47	12	8,32	4,15	0,173	7,5	56 000	85 000	0,065	7005 CE/HCP4A	VEX 25 /NS 7CE1
	47	12	7,93	3,9	0,166	-	42 000	63 000	0,074	7005 ACE/P4A	VEX 25 7CE3
	47	12	7,93	3,9	0,166	-	50 000	75 000	0,065	7005 ACE/HCP4A	VEX 25 /NS 7CE3
30	47	9	5,59	3,25	0,14	8,3	41 000	63 000	0,050	71906 CE/P4A	VEB 30 7CE1
	47	9	5,59	3,25	0,14	8,3	49 000	75 000	0,045	71906 CE/HCP4A	VEB 30 /NS 7CE1
	47	9	5,27	3,1	0,132	-	37 000	58 000	0,050	71906 ACE/P4A	VEB 30 7CE3
	47	9	5,27	3,1	0,132	-	44 000	70 000	0,045	71906 ACE/HCP4A	VEB 30 /NS 7CE3
	55	13	9,36	5,2	0,22	7,9	39 000	60 000	0,11	7006 CE/P4A	VEX 30 7CE1
	55	13	9,36	5,2	0,22	7,9	47 000	73 000	0,10	7006 CE/HCP4A	VEX 30 /NS 7CE1
	55	13	8,84	5	0,212	-	35 000	54 000	0,11	7006 ACE/P4A	VEX 30 7CE3
	55	13	8,84	5	0,212	-	42 000	65 000	0,10	7006 ACE/HCP4A	VEX 30 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only  
<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

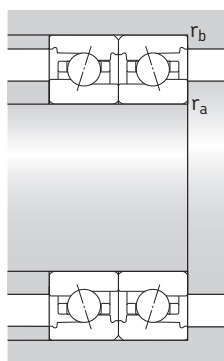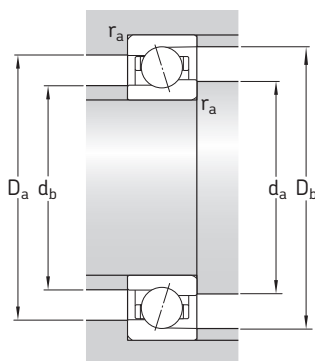


**Dimensions**

**Abutment and fillet dimensions**


d	d <sub>1</sub>	D <sub>1</sub>	r <sub>1,2</sub> min	r <sub>3,4</sub> min	a	d <sub>a,d<sub>b</sub></sub> min	D <sub>a</sub> max	D <sub>b</sub> max	r <sub>a</sub> max	r <sub>b</sub> max
						mm				
<b>15</b>	19,1	23,9	0,3	0,15	7	17	26	26,6	0,3	0,15
	19,1	23,9	0,3	0,15	7	17	26	26,6	0,3	0,15
	19,1	23,9	0,3	0,15	9	17	26	26,6	0,3	0,15
	19,1	23,9	0,3	0,15	9	17	26	26,6	0,3	0,15
	20,7	28,8	0,3	0,15	8	17	30	30,6	0,3	0,15
	20,7	28,8	0,3	0,15	8	17	30	30,6	0,3	0,15
	20,7	28,8	0,3	0,15	10	17	30	30,6	0,3	0,15
	20,7	28,8	0,3	0,15	10	17	30	30,6	0,3	0,15
<b>17</b>	21,1	25,9	0,3	0,15	7	19	28	28,6	0,3	0,15
	21,1	25,9	0,3	0,15	7	19	28	28,6	0,3	0,15
	21,1	25,9	0,3	0,15	10	19	28	28,6	0,3	0,15
	21,1	25,9	0,3	0,15	10	19	28	28,6	0,3	0,15
	22,7	31,2	0,3	0,15	9	19	33	33,6	0,3	0,15
	22,7	31,2	0,3	0,15	9	19	33	33,6	0,3	0,15
	22,7	31,2	0,3	0,15	11	19	33	33,6	0,3	0,15
	22,7	31,2	0,3	0,15	11	19	33	33,6	0,3	0,15
<b>20</b>	25,7	31,5	0,3	0,15	9	22	35	35,6	0,3	0,15
	25,7	31,5	0,3	0,15	9	22	35	35,6	0,3	0,15
	25,7	31,5	0,3	0,15	12	22	35	35,6	0,3	0,15
	25,7	31,5	0,3	0,15	12	22	35	35,6	0,3	0,15
	26,6	36,5	0,6	0,3	10	22	40	39,6	0,6	0,3
	26,6	36,5	0,6	0,3	10	22	40	39,6	0,6	0,3
	26,6	36,5	0,6	0,3	13	22	40	39,6	0,6	0,3
	26,6	36,5	0,6	0,3	13	22	40	39,6	0,6	0,3
<b>25</b>	30,7	36,4	0,3	0,15	9	27	40	40,6	0,3	0,15
	30,7	36,4	0,3	0,15	9	27	40	40,6	0,3	0,15
	30,7	36,4	0,3	0,15	13	27	40	40,6	0,3	0,15
	30,7	36,4	0,3	0,15	13	27	40	40,6	0,3	0,15
	31,6	41,5	0,6	0,3	11	28,2	43,8	44,6	0,6	0,3
	31,6	41,5	0,6	0,3	11	28,2	43,8	44,6	0,6	0,3
	31,6	41,5	0,6	0,3	14	28,2	43,8	44,6	0,6	0,3
	31,6	41,5	0,6	0,3	14	28,2	43,8	44,6	0,6	0,3
<b>30</b>	35,8	41,4	0,3	0,15	10	32	45	45,6	0,3	0,15
	35,8	41,4	0,3	0,15	10	32	45	45,6	0,3	0,15
	35,8	41,4	0,3	0,15	14	32	45	45,6	0,3	0,15
	35,8	41,4	0,3	0,15	14	32	45	45,6	0,3	0,15
	38,2	48,1	1	0,6	12	34,6	50,4	50,8	1	0,6
	38,2	48,1	1	0,6	12	34,6	50,4	50,8	1	0,6
	38,2	48,1	1	0,6	16	34,6	50,4	50,8	1	0,6
	38,2	48,1	1	0,6	16	34,6	50,4	50,8	1	0,6

Super-precision angular contact ball bearings


d 35 – 55 mm

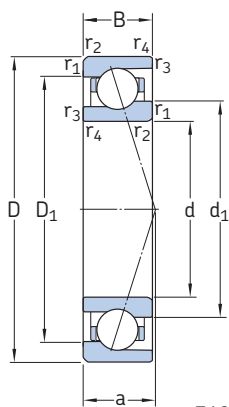

Open variant 719 .. E (VEB) series



Sealed variant for d = 20 to 120 mm

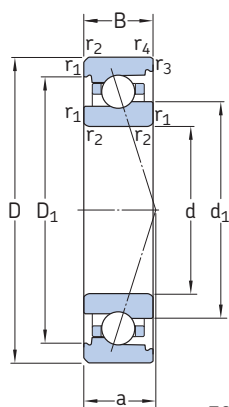

Open variant 70 .. E (VEX) series






Sealed variant for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	C	C <sub>0</sub>			P <sub>u</sub>	f <sub>0</sub>		when lubricating with grease	oil-air <sup>1)</sup>
mm			kN		kN	-	r/min		kg	-	
35	55	10	7,61	4,75	0,2	8,3	36 000	54 000	0,075	71907 CE/P4A	VEB 35 7CE1
	55	10	7,61	4,75	0,2	8,3	43 000	65 000	0,067	71907 CE/HCP4A	VEB 35 /NS 7CE1
	55	10	7,28	4,5	0,19	-	32 000	50 000	0,075	71907 ACE/P4A	VEB 35 7CE3
	55	10	7,28	4,5	0,19	-	38 000	60 000	0,067	71907 ACE/HCP4A	VEB 35 /NS 7CE3
	62	14	11,4	6,55	0,28	7,9	34 000	50 000	0,15	7007 CE/P4A	VEX 35 7CE1
	62	14	11,4	6,55	0,28	7,9	40 000	63 000	0,13	7007 CE/HCP4A	VEX 35 /NS 7CE1
	62	14	11,1	6,3	0,265	-	31 000	46 000	0,15	7007 ACE/P4A	VEX 35 7CE3
	62	14	11,1	6,3	0,265	-	36 000	56 000	0,13	7007 ACE/HCP4A	VEX 35 /NS 7CE3
40	62	12	9,75	6,1	0,26	8,3	32 000	49 000	0,10	71908 CE/P4A	VEB 40 7CE1
	62	12	9,75	6,1	0,26	8,3	38 000	58 000	0,088	71908 CE/HCP4A	VEB 40 /NS 7CE1
	62	12	9,23	5,85	0,245	-	28 000	44 000	0,10	71908 ACE/P4A	VEB 40 7CE3
	62	12	9,23	5,85	0,245	-	34 000	52 000	0,088	71908 ACE/HCP4A	VEB 40 /NS 7CE3
	68	15	12,4	7,65	0,32	8,1	30 000	45 000	0,19	7008 CE/P4A	VEX 40 7CE1
	68	15	12,4	7,65	0,32	8,1	36 000	56 000	0,17	7008 CE/HCP4A	VEX 40 /NS 7CE1
	68	15	11,7	7,2	0,305	-	27 000	41 000	0,19	7008 ACE/P4A	VEX 40 7CE3
	68	15	11,7	7,2	0,305	-	32 000	50 000	0,17	7008 ACE/HCP4A	VEX 40 /NS 7CE3
45	68	12	10,1	6,95	0,29	8,4	29 000	44 000	0,13	71909 CE/P4A	VEB 45 7CE1
	68	12	10,1	6,95	0,29	8,4	34 000	52 000	0,12	71909 CE/HCP4A	VEB 45 /NS 7CE1
	68	12	9,75	6,55	0,275	-	25 000	39 000	0,13	71909 ACE/P4A	VEB 45 7CE3
	68	12	9,75	6,55	0,275	-	30 000	47 000	0,12	71909 ACE/HCP4A	VEB 45 /NS 7CE3
	75	16	13	8,5	0,36	8,2	27 000	41 000	0,24	7009 CE/P4A	VEX 45 7CE1
	75	16	13	8,5	0,36	8,2	32 000	50 000	0,22	7009 CE/HCP4A	VEX 45 /NS 7CE1
	75	16	12,1	8,15	0,345	-	24 000	37 000	0,24	7009 ACE/P4A	VEX 45 7CE3
	75	16	12,1	8,15	0,345	-	29 000	45 000	0,22	7009 ACE/HCP4A	VEX 45 /NS 7CE3
50	72	12	12,7	8,65	0,365	8,4	26 000	40 000	0,13	71910 CE/P4A	VEB 50 7CE1
	72	12	12,7	8,65	0,365	8,4	32 000	48 000	0,11	71910 CE/HCP4A	VEB 50 /NS 7CE1
	72	12	12,1	8,15	0,345	-	23 000	36 000	0,13	71910 ACE/P4A	VEB 50 7CE3
	72	12	12,1	8,15	0,345	-	28 000	43 000	0,11	71910 ACE/HCP4A	VEB 50 /NS 7CE3
	80	16	15,6	10,6	0,45	8,2	25 000	38 000	0,25	7010 CE/P4A	VEX 50 7CE1
	80	16	15,6	10,6	0,45	8,2	30 000	46 000	0,23	7010 CE/HCP4A	VEX 50 /NS 7CE1
	80	16	14,8	10	0,425	-	23 000	34 000	0,25	7010 ACE/P4A	VEX 50 7CE3
	80	16	14,8	10	0,425	-	27 000	41 000	0,23	7010 ACE/HCP4A	VEX 50 /NS 7CE3
55	80	13	15,3	10,6	0,455	8,4	24 000	36 000	0,17	71911 CE/P4A	VEB 55 7CE1
	80	13	15,3	10,6	0,455	8,4	28 000	43 000	0,14	71911 CE/HCP4A	VEB 55 /NS 7CE1
	80	13	14,6	10,2	0,43	-	21 000	32 000	0,17	71911 ACE/P4A	VEB 55 7CE3
	80	13	14,6	10,2	0,43	-	25 000	39 000	0,14	71911 ACE/HCP4A	VEB 55 /NS 7CE3
	90	18	16,8	12,2	0,52	8,4	22 000	34 000	0,39	7011 CE/P4A	VEX 55 7CE1
	90	18	16,8	12,2	0,52	8,4	25 000	39 000	0,36	7011 CE/HCP4A	VEX 55 /NS 7CE1
	90	18	15,9	11,6	0,49	-	19 000	30 000	0,39	7011 ACE/P4A	VEX 55 7CE3
	90	18	15,9	11,6	0,49	-	23 000	35 000	0,36	7011 ACE/HCP4A	VEX 55 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only

<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

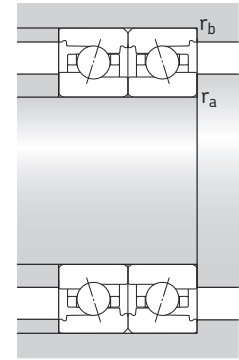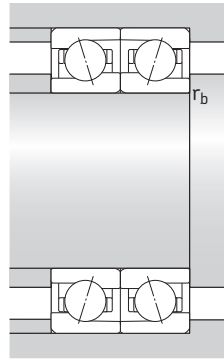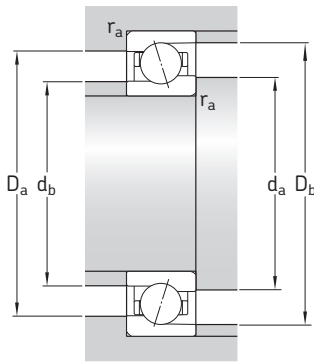

Dimensions


Abutment and fillet dimensions

d	d <sub>1</sub>	D <sub>1</sub>	r <sub>1,2</sub> min	r <sub>3,4</sub> min	a	d <sub>a,d<sub>b</sub></sub> min	D <sub>a</sub> max	D <sub>b</sub> max	r <sub>a</sub> max	r <sub>b</sub> max
mm						mm				
35	41,7	48,3	0,6	0,3	11	38,2	51,8	52,6	0,6	0,3
	41,7	48,3	0,6	0,3	11	38,2	51,8	52,6	0,6	0,3
	41,7	48,3	0,6	0,3	16	38,2	51,8	52,6	0,6	0,3
	41,7	48,3	0,6	0,3	16	38,2	51,8	52,6	0,6	0,3
	43,7	54,9	1	0,6	14	39,6	57,4	57,8	1	0,6
	43,7	54,9	1	0,6	14	39,6	57,4	57,8	1	0,6
	43,7	54,9	1	0,6	18	39,6	57,4	57,8	1	0,6
	43,7	54,9	1	0,6	18	39,6	57,4	57,8	1	0,6
40	46,5	54,2	0,6	0,3	13	43,2	58,8	59,6	0,6	0,3
	46,5	54,2	0,6	0,3	13	43,2	58,8	59,6	0,6	0,3
	46,5	54,2	0,6	0,3	19	43,2	58,8	59,6	0,6	0,3
	46,5	54,2	0,6	0,3	19	43,2	58,8	59,6	0,6	0,3
	49,7	60,9	1	0,6	15	44,6	63,4	63,8	1	0,6
	49,7	60,9	1	0,6	15	44,6	63,4	63,8	1	0,6
	49,7	60,9	1	0,6	20	44,6	63,4	63,8	1	0,6
	49,7	60,9	1	0,6	20	44,6	63,4	63,8	1	0,6
45	52,7	60,3	0,6	0,3	14	43,2	64,8	65,6	0,6	0,3
	52,7	60,3	0,6	0,3	14	43,2	64,8	65,6	0,6	0,3
	52,7	60,3	0,6	0,3	20	43,2	64,8	65,6	0,6	0,3
	52,7	60,3	0,6	0,3	20	43,2	64,8	65,6	0,6	0,3
	55,7	66,9	1	0,6	16	49,6	70,4	70,8	1	0,6
	55,7	66,9	1	0,6	16	49,6	70,4	70,8	1	0,6
	55,7	66,9	1	0,6	22	49,6	70,4	70,8	1	0,6
	55,7	66,9	1	0,6	22	49,6	70,4	70,8	1	0,6
50	56,7	65,3	0,6	0,3	15	53,2	68,8	69,6	0,6	0,3
	56,7	65,3	0,6	0,3	15	53,2	68,8	69,6	0,6	0,3
	56,7	65,3	0,6	0,3	21	53,2	68,8	69,6	0,6	0,3
	56,7	65,3	0,6	0,3	21	53,2	68,8	69,6	0,6	0,3
	60,3	72,9	1	0,6	17	54,6	75,4	75,8	1	0,6
	60,3	72,9	1	0,6	17	54,6	75,4	75,8	1	0,6
	60,3	72,9	1	0,6	23	54,6	75,4	75,8	1	0,6
	60,3	72,9	1	0,6	23	54,6	75,4	75,8	1	0,6
55	62,8	72,3	1	0,3	16	59,6	75,4	77,6	1	0,3
	62,8	72,3	1	0,3	16	59,6	75,4	77,6	1	0,3
	62,8	72,3	1	0,3	23	59,6	75,4	77,6	1	0,3
	62,8	72,3	1	0,3	23	59,6	75,4	77,6	1	0,3
	67,7	80,4	1,1	0,6	19	61	84	85,8	1,1	0,6
	67,7	80,4	1,1	0,6	19	61	84	85,8	1,1	0,6
	67,7	80,4	1,1	0,6	26	61	84	85,8	1,1	0,6
	67,7	80,4	1,1	0,6	26	61	84	85,8	1,1	0,6




Super-precision angular contact ball bearings


d 60 – 80 mm

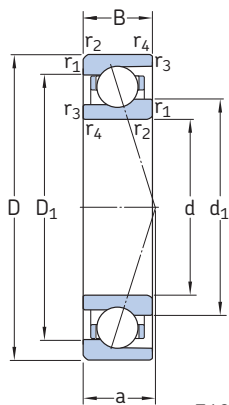

Open variant  
719 .. E (VEB) series



Sealed variant  
for d = 20 to 120 mm

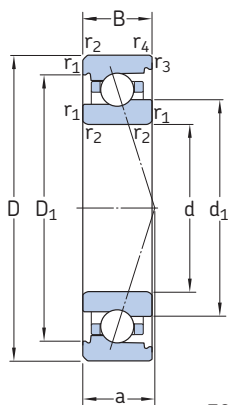

Open variant  
70 .. E (VEX) series






Sealed variant  
for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	C	C <sub>0</sub>			P <sub>u</sub>	f <sub>0</sub>		when lubricating with grease	oil-air <sup>1)</sup>
mm			kN		kN	-	r/min		kg	-	
60	85	13	16,3	11,8	0,5	8,5	22 000	34 000	0,19	71912 CE/P4A	VEB 60 7CE1
	85	13	16,3	11,8	0,5	8,5	26 000	40 000	0,16	71912 CE/HCP4A	VEB 60 /NS 7CE1
	85	13	15,3	11,2	0,475	-	19 500	30 000	0,19	71912 ACE/P4A	VEB 60 7CE3
	85	13	15,3	11,2	0,475	-	23 000	36 000	0,16	71912 ACE/HCP4A	VEB 60 /NS 7CE3
	95	18	17,2	12,9	0,54	8,5	20 000	31 000	0,42	7012 CE/P4A	VEX 60 7CE1
	95	18	17,2	12,9	0,54	8,5	24 000	37 000	0,39	7012 CE/HCP4A	VEX 60 /NS 7CE1
	95	18	16,3	12,2	0,52	-	18 000	28 000	0,42	7012 ACE/P4A	VEX 60 7CE3
95	18	16,3	12,2	0,52	-	22 000	33 000	0,39	7012 ACE/HCP4A	VEX 60 /NS 7CE3	
65	90	13	16,5	12,5	0,53	8,5	20 000	31 000	0,20	71913 CE/P4A	VEB 65 7CE1
	90	13	16,5	12,5	0,53	8,5	24 000	38 000	0,17	71913 CE/HCP4A	VEB 65 /NS 7CE1
	90	13	15,6	11,8	0,5	-	18 000	28 000	0,20	71913 ACE/P4A	VEB 65 7CE3
	90	13	15,6	11,8	0,5	-	22 000	34 000	0,17	71913 ACE/HCP4A	VEB 65 /NS 7CE3
	100	18	20,3	15,6	0,655	8,4	19 000	30 000	0,43	7013 CE/P4A	VEX 65 7CE1
	100	18	20,3	15,6	0,655	8,4	22 000	34 000	0,39	7013 CE/HCP4A	VEX 65 /NS 7CE1
	100	18	19,5	14,6	0,62	-	17 000	26 000	0,43	7013 ACE/P4A	VEX 65 7CE3
100	18	19,5	14,6	0,62	-	20 000	31 000	0,39	7013 ACE/HCP4A	VEX 65 /NS 7CE3	
70	100	16	22,1	16,3	0,68	8,4	18 500	28 000	0,32	71914 CE/P4A	VEB 70 7CE1
	100	16	22,1	16,3	0,68	8,4	22 000	34 000	0,27	71914 CE/HCP4A	VEB 70 /NS 7CE1
	100	16	20,8	15,3	0,655	-	16 500	26 000	0,32	71914 ACE/P4A	VEB 70 7CE3
	100	16	20,8	15,3	0,655	-	20 000	31 000	0,27	71914 ACE/HCP4A	VEB 70 /NS 7CE3
	110	20	23,8	18,3	0,780	8,4	17 000	27 000	0,61	7014 CE/P4A	VEX 70 7CE1
	110	20	23,8	18,3	0,780	8,4	20 500	32 000	0,56	7014 CE/HCP4A	VEX 70 /NS 7CE1
	110	20	22,5	17,3	0,735	-	15 500	24 000	0,61	7014 ACE/P4A	VEX 70 7CE3
110	20	22,5	17,3	0,735	-	18 500	29 000	0,56	7014 ACE/HCP4A	VEX 70 /NS 7CE3	
75	105	16	22,5	17	0,72	8,5	17 500	27 000	0,34	71915 CE/P4A	VEB 75 7CE1
	105	16	22,5	17	0,72	8,5	20 500	32 000	0,29	71915 CE/HCP4A	VEB 75 /NS 7CE1
	105	16	21,2	16,3	0,68	-	15 500	24 000	0,34	71915 ACE/P4A	VEB 75 7CE3
	105	16	21,2	16,3	0,68	-	18 500	29 000	0,29	71915 ACE/HCP4A	VEB 75 /NS 7CE3
	115	20	26	21,6	0,915	9,5	16 000	26 000	0,65	7015 CE/P4A	VEX 75 7CE1
	115	20	26	21,6	0,915	9,5	19 000	29 000	0,59	7015 CE/HCP4A	VEX 75 /NS 7CE1
	115	20	24,7	20,4	0,865	-	14 500	23 000	0,65	7015 ACE/P4A	VEX 75 7CE3
115	20	24,7	20,4	0,865	-	17 000	27 000	0,59	7015 ACE/HCP4A	VEX 75 /NS 7CE3	
80	110	16	22,5	18	0,75	8,6	16 500	25 000	0,36	71916 CE/P4A	VEB 80 7CE1
	110	16	22,5	18	0,75	8,6	19 000	30 000	0,31	71916 CE/HCP4A	VEB 80 /NS 7CE1
	110	16	21,2	17	0,71	-	14 500	22 000	0,36	71916 ACE/P4A	VEB 80 7CE3
	110	16	21,2	17	0,71	-	17 500	27 000	0,31	71916 ACE/HCP4A	VEB 80 /NS 7CE3
	125	22	33,8	28	1,18	9,4	15 000	24 000	0,86	7016 CE/P4A	VEX 80 7CE1
	125	22	33,8	28	1,18	9,4	17 500	27 000	0,77	7016 CE/HCP4A	VEX 80 /NS 7CE1
	125	22	32,5	26,5	1,12	-	13 700	21 000	0,86	7016 ACE/P4A	VEX 80 7CE3
	125	22	32,5	26,5	1,12	-	15 500	24 000	0,77	7016 ACE/HCP4A	VEX 80 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only

<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

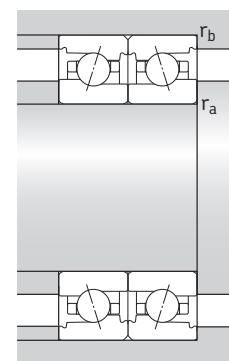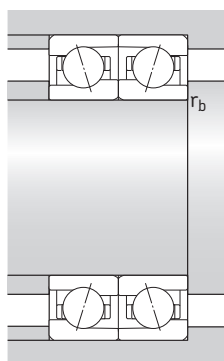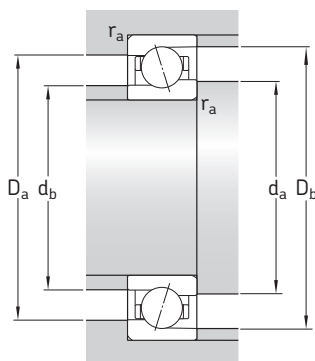


Dimensions

Abutment and fillet dimensions


d	d <sub>1</sub>	D <sub>1</sub>	r <sub>1,2</sub> min	r <sub>3,4</sub> min	a	d <sub>a,d_b</sub> min	D <sub>a</sub> max	D <sub>b</sub> max	r <sub>a</sub> max	r <sub>b</sub> max
						mm				
60	67,8	77,3	1	0,3	17	64,6	80,4	82,6	1	0,3
	67,8	77,3	1	0,3	17	64,6	80,4	82,6	1	0,3
	67,8	77,3	1	0,3	25	64,6	80,4	82,6	1	0,3
	67,8	77,3	1	0,3	25	64,6	80,4	82,6	1	0,3
	72,7	85,4	1,1	0,6	19	66	89	90,8	1,1	0,6
	72,7	85,4	1,1	0,6	19	66	89	90,8	1,1	0,6
	72,7	85,4	1,1	0,6	27	66	89	90,8	1,1	0,6
	72,7	85,4	1,1	0,6	27	66	89	90,8	1,1	0,6
65	72,8	82,3	1	0,3	18	69,6	85,4	87,6	1	0,3
	72,8	82,3	1	0,3	18	69,6	85,4	87,6	1	0,3
	72,8	82,3	1	0,3	26	69,6	85,4	87,6	1	0,3
	72,8	82,3	1	0,3	26	69,6	85,4	87,6	1	0,3
	77,3	91,1	1,1	0,6	20	71	94	95,8	1,1	0,6
	77,3	91,1	1,1	0,6	20	71	94	95,8	1,1	0,6
	77,3	91,1	1,1	0,6	28	71	94	95,8	1,1	0,6
	77,3	91,1	1,1	0,6	28	71	94	95,8	1,1	0,6
70	79,3	90,5	1	0,3	20	74,6	95,4	97,6	1	0,3
	79,3	90,5	1	0,3	20	74,6	95,4	97,6	1	0,3
	79,3	90,5	1	0,3	29	74,6	95,4	97,6	1	0,3
	79,3	90,5	1	0,3	29	74,6	95,4	97,6	1	0,3
	84,3	98,6	1,1	0,6	22	76	104	105,8	1,1	0,6
	84,3	98,6	1,1	0,6	22	76	104	105,8	1,1	0,6
	84,3	98,6	1,1	0,6	31	76	104	105,8	1,1	0,6
	84,3	98,6	1,1	0,6	31	76	104	105,8	1,1	0,6
75	84,3	95,5	1	0,3	21	79,6	100	102,6	1	0,3
	84,3	95,5	1	0,3	21	79,6	100	102,6	1	0,3
	84,3	95,5	1	0,3	30	79,6	100	102,6	1	0,3
	84,3	95,5	1	0,3	30	79,6	100	102,6	1	0,3
	89,3	104,1	1,1	0,6	23	81	109	110,8	1,1	0,6
	89,3	104,1	1,1	0,6	23	81	109	110,8	1,1	0,6
	89,3	104,1	1,1	0,6	32	81	109	110,8	1,1	0,6
	89,3	104,1	1,1	0,6	32	81	109	110,8	1,1	0,6
80	89,3	100,52	1	0,3	22	84,6	105	107,6	1	0,3
	89,3	100,52	1	0,3	22	84,6	105	107,6	1	0,3
	89,3	100,52	1	0,3	32	84,6	105	107,6	1	0,3
	89,3	100,52	1	0,3	32	84,6	105	107,6	1	0,3
	95,8	112,6	1,1	0,6	25	86	119	120,8	1,1	0,6
	95,8	112,6	1,1	0,6	25	86	119	120,8	1,1	0,6
	95,8	112,6	1,1	0,6	35	86	119	120,8	1,1	0,6
	95,8	112,6	1,1	0,6	35	86	119	120,8	1,1	0,6

Super-precision angular contact ball bearings


d 85 – 110 mm

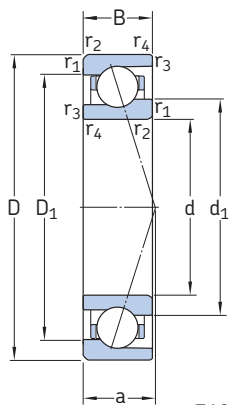

Open variant  
719 .. E (VEB) series



Sealed variant  
for d = 20 to 120 mm

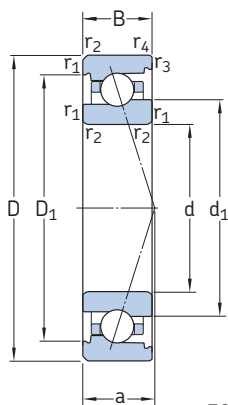

Open variant  
70 .. E (VEX) series






Sealed variant  
for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	C	C <sub>0</sub>			P <sub>u</sub>	f <sub>0</sub>		when lubricating with grease	oil-air <sup>1)</sup>
mm			kN		kN	-	r/min		kg	-	
85	120	18	29,6	23,2	0,95	8,4	15 500	24 000	0,50	71917 CE/P4A	VEB 85 7CE1
	120	18	29,6	23,2	0,95	8,4	18 000	28 000	0,42	71917 CE/HCP4A	VEB 85 /NS 7CE1
	120	18	28,1	22	0,9	-	13 700	21 000	0,50	71917 ACE/P4A	VEB 85 7CE3
	120	18	28,1	22	0,9	-	16 500	25 000	0,42	71917 ACE/HCP4A	VEB 85 /NS 7CE3
	130	22	34,5	29	1,2	9,5	14 000	22 000	0,90	7017 CE/P4A	VEX 85 7CE1
	130	22	34,5	29	1,2	9,5	16 500	26 000	0,81	7017 CE/HCP4A	VEX 85 /NS 7CE1
	130	22	32,5	28	1,14	-	13 000	20 000	0,90	7017 ACE/P4A	VEX 85 7CE3
	130	22	32,5	28	1,14	-	15 000	23 000	0,81	7017 ACE/HCP4A	VEX 85 /NS 7CE3
90	125	18	30,2	24,5	0,965	8,5	14 500	22 000	0,54	71918 CE/P4A	VEB 90 7CE1
	125	18	30,2	24,5	0,965	8,5	17 000	27 000	0,46	71918 CE/HCP4A	VEB 90 /NS 7CE1
	125	18	28,6	23,2	0,915	-	13 000	20 000	0,54	71918 ACE/P4A	VEB 90 7CE3
	125	18	28,6	23,2	0,915	-	15 500	24 000	0,46	71918 ACE/HCP4A	VEB 90 /NS 7CE3
	140	24	35,8	32	1,27	9,6	13 300	21 000	1,20	7018 CE/P4A	VEX 90 7CE1
	140	24	35,8	32	1,27	9,6	15 500	24 000	1,10	7018 CE/HCP4A	VEX 90 /NS 7CE1
	140	24	33,8	30	1,2	-	12 000	19 000	1,20	7018 ACE/P4A	VEX 90 7CE3
	140	24	33,8	30	1,2	-	14 000	22 000	1,10	7018 ACE/HCP4A	VEX 90 /NS 7CE3
95	130	18	30,7	25,5	0,98	8,6	14 000	21 000	0,56	71919 CE/P4A	VEB 95 7CE1
	130	18	30,7	25,5	0,98	8,6	16 000	25 000	0,48	71919 CE/HCP4A	VEB 95 /NS 7CE1
	130	18	29,1	24	0,93	-	12 300	19 000	0,56	71919 ACE/P4A	VEB 95 7CE3
	130	18	29,1	24	0,93	-	15 000	23 000	0,48	71919 ACE/HCP4A	VEB 95 /NS 7CE3
	145	24	44,2	38	1,46	9,4	12 700	20 000	1,20	7019 CE/P4A	VEX 95 7CE1
	145	24	44,2	38	1,46	9,4	15 000	23 000	1,10	7019 CE/HCP4A	VEX 95 /NS 7CE1
	145	24	41,6	36	1,4	-	11 500	18 000	1,20	7019 ACE/P4A	VEX 95 7CE3
	145	24	41,6	36	1,4	-	13 300	20 500	1,10	7019 ACE/HCP4A	VEX 95 /NS 7CE3
100	140	20	39	31,5	1,2	8,5	13 300	20 500	0,77	71920 CE/P4A	VEB 100 7CE1
	140	20	39	31,5	1,2	8,5	15 500	24 000	0,65	71920 CE/HCP4A	VEB 100 /NS 7CE1
	140	20	36,4	30	1,14	-	11 500	18 000	0,77	71920 ACE/P4A	VEB 100 7CE3
	140	20	36,4	30	1,14	-	13 700	22 000	0,65	71920 ACE/HCP4A	VEB 100 /NS 7CE3
	150	24	44,9	40	1,5	9,5	12 300	19 000	1,35	7020 CE/P4A	VEX 100 7CE1
	150	24	44,9	40	1,5	9,5	14 500	22 000	1,10	7020 CE/HCP4A	VEX 100 /NS 7CE1
	150	24	42,3	38	1,43	-	11 200	17 500	1,25	7020 ACE/P4A	VEX 100 7CE3
	150	24	42,3	38	1,43	-	12 700	20 000	1,10	7020 ACE/HCP4A	VEX 100 /NS 7CE3
110	150	20	39,7	34,5	1,25	8,6	12 000	18 000	0,83	71922 CE/P4A	VEB 110 7CE1
	150	20	39,7	34,5	1,25	8,6	14 000	22 000	0,70	71922 CE/HCP4A	VEB 110 /NS 7CE1
	150	20	37,7	32,5	1,18	-	10 300	16 000	0,83	71922 ACE/P4A	VEB 110 7CE3
	150	20	37,7	32,5	1,18	-	12 300	19 000	0,70	71922 ACE/HCP4A	VEB 110 /NS 7CE3
	170	28	47,5	45	1,6	9,6	10 900	17 000	2,10	7022 CE/P4A	VEX 110 7CE1
	170	28	47,5	45	1,6	9,6	12 700	20 000	1,95	7022 CE/HCP4A	VEX 110 /NS 7CE1
	170	28	44,9	42,5	1,53	-	10 000	15 500	2,10	7022 ACE/P4A	VEX 110 7CE3
	170	28	44,9	42,5	1,53	-	11 500	17 500	1,95	7022 ACE/HCP4A	VEX 110 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only

<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

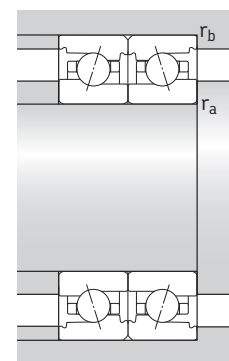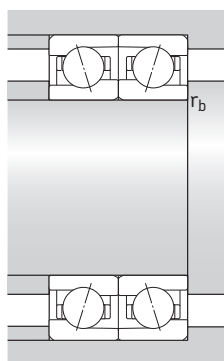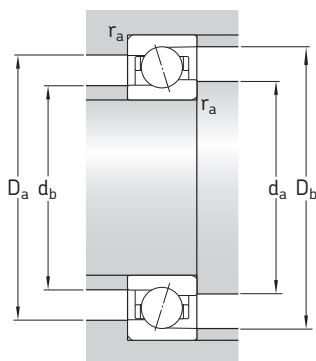


**Dimensions**

**Abutment and fillet dimensions**


d	d <sub>1</sub>	D <sub>1</sub>	r <sub>1,2</sub> min	r <sub>3,4</sub> min	a	d <sub>a,d<sub>b</sub></sub> min	D <sub>a</sub> max	D <sub>b</sub> max	r <sub>a</sub> max	r <sub>b</sub> max
mm						mm				
<b>85</b>	96	109,22	1,1	0,6	23	91	114	115,8	1,1	0,6
	96	109,22	1,1	0,6	23	91	114	115,8	1,1	0,6
	96	109,22	1,1	0,6	34	91	114	115,8	1,1	0,6
	96	109,22	1,1	0,6	34	91	114	115,8	1,1	0,6
	100,8	117,6	1,1	0,6	26	91	124	125,8	1,1	0,6
	100,8	117,6	1,1	0,6	26	91	124	125,8	1,1	0,6
	100,8	117,6	1,1	0,6	36	91	124	125,8	1,1	0,6
	100,8	117,6	1,1	0,6	36	91	124	125,8	1,1	0,6
<b>90</b>	101	114,22	1,1	0,6	24	96	119	120,8	1,1	0,6
	101	114,22	1,1	0,6	24	96	119	120,8	1,1	0,6
	101	114,22	1,1	0,6	36	96	119	120,8	1,1	0,6
	101	114,22	1,1	0,6	36	96	119	120,8	1,1	0,6
	108,3	125,2	1,5	1	28	97	133	134,4	1,5	1
	108,3	125,2	1,5	1	28	97	133	134,4	1,5	1
	108,3	125,2	1,5	1	39	97	133	134,4	1,5	1
	108,3	125,2	1,5	1	39	97	133	134,4	1,5	1
<b>95</b>	106	119,22	1,1	0,6	25	101	124	125,8	1,1	0,6
	106	119,22	1,1	0,6	25	101	124	125,8	1,1	0,6
	106	119,22	1,1	0,6	37	101	124	125,8	1,1	0,6
	106	119,22	1,1	0,6	37	101	124	125,8	1,1	0,6
	112,4	131	1,5	1	28	102	138	139,4	1,5	1
	112,4	131	1,5	1	28	102	138	139,4	1,5	1
	112,4	131	1,5	1	40	102	138	139,4	1,5	1
	112,4	131	1,5	1	40	102	138	139,4	1,5	1
<b>100</b>	112,4	127,51	1,1	0,6	27	106	134	135,8	1,1	0,6
	112,4	127,51	1,1	0,6	27	106	134	135,8	1,1	0,6
	112,4	127,51	1,1	0,6	39	106	134	135,8	1,1	0,6
	112,4	127,51	1,1	0,6	39	106	134	135,8	1,1	0,6
	117,4	136	1,5	1	29	107	143	144,4	1,5	1
	117,4	136	1,5	1	29	107	143	144,4	1,5	1
	117,4	136	1,5	1	41	107	143	144,4	1,5	1
	117,4	136	1,5	1	41	107	143	144,4	1,5	1
<b>110</b>	122,4	137,51	1,1	0,6	29	111	139	145,8	1,1	0,6
	122,4	137,51	1,1	0,6	29	111	139	145,8	1,1	0,6
	122,4	137,51	1,1	0,6	43	111	139	145,8	1,1	0,6
	122,4	137,51	1,1	0,6	43	111	139	145,8	1,1	0,6
	132,4	152,2	2	1	33	118,8	161,2	164,4	2	1
	132,4	152,2	2	1	33	118,8	161,2	164,4	2	1
	132,4	152,2	2	1	47	118,8	161,2	164,4	2	1
	132,4	152,2	2	1	47	118,8	161,2	164,4	2	1

Super-precision angular contact ball bearings


d 120 mm

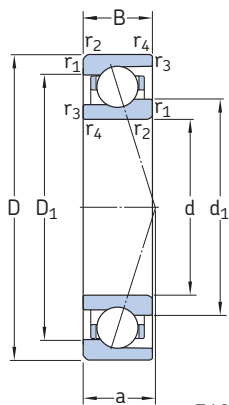

Open variant 719 .. E (VEB) series



Sealed variant for d = 20 to 120 mm

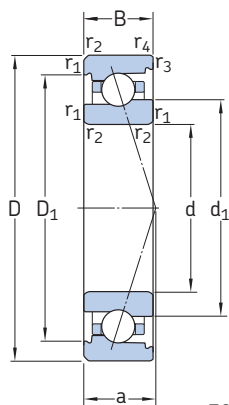

Open variant 70 .. E (VEX) series






Sealed variant for d = 10 to 120 mm

Principal dimensions			Basic load ratings		Fatigue load limit	Calculation factor	Attainable speeds		Mass <sup>1)</sup>	Designations of open bearings <sup>2)</sup>	
d	D	B	dynamic	static			when lubricating with grease	oil-air <sup>1)</sup>		SKF	SNFA
mm			kN	kN	–	r/min	kg	–			
120	165	22	47,5	40,5	1,4	8,5	11 200	16 000	1,10	71924 CE/P4A	VEB 120 7CE1
	165	22	47,5	40,5	1,4	8,5	12 700	19 000	0,93	71924 CE/HCP4A	VEB 120 /NS 7CE1
	165	22	44,9	38	1,32	-	9 500	15 000	1,10	71924 ACE/P4A	VEB 120 7CE3
	165	22	44,9	38	1,32	-	11 500	17 500	0,93	71924 ACE/HCP4A	VEB 120 /NS 7CE3
	180	28	57,2	55	1,9	9,6	9 300	14 500	2,20	7024 CE/P4A	VEX 120 7CE1
	180	28	57,2	55	1,9	9,6	11 200	17 500	1,95	7024 CE/HCP4A	VEX 120 /NS 7CE1
	180	28	54	52	1,8	-	8 300	13 000	2,20	7024 ACE/P4A	VEX 120 7CE3
	180	28	54	52	1,8	-	10 000	15 500	1,95	7024 ACE/HCP4A	VEX 120 /NS 7CE3

<sup>1)</sup> Applicable to open bearings only

<sup>2)</sup> For designations of sealed bearings and other variants, refer to table 17 on pages 32 and 33.

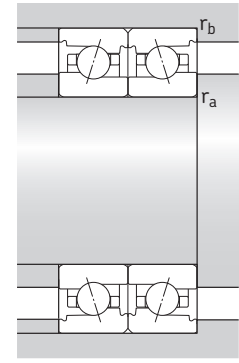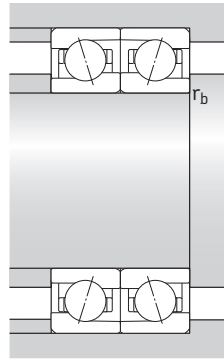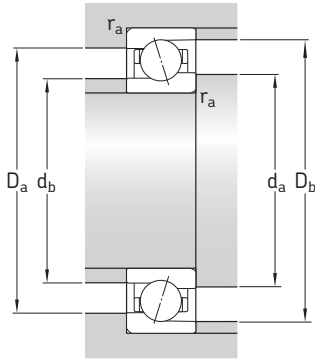

**Dimensions**

**Abutment and fillet dimensions**

d	$d_1$ ~	$D_1$ ~	$r_{1,2}$ min	$r_{3,4}$ min	a	$d_a, d_b$ min	$D_a$ max	$D_b$ max	$r_a$ max	$r_b$ max
mm						mm				
<b>120</b>	134	151,01	1,1	0,6	31	116	154	160,8	1,1	0,6
	134	151,01	1,1	0,6	31	116	154	160,8	1,1	0,6
	134	151,01	1,1	0,6	46	116	154	160,8	1,1	0,6
	134	151,01	1,1	0,6	46	116	154	160,8	1,1	0,6
	141,4	163,2	2	1	34	128,8	171,2	174,4	2	1
	141,4	163,2	2	1	34	128,8	171,2	174,4	2	1
	141,4	163,2	2	1	49	128,8	171,2	174,4	2	1
	141,4	163,2	2	1	49	128,8	171,2	174,4	2	1

# Setting the highest standard for precision bearings

SKF has developed and is continuing to develop a new, improved generation of super-precision bearings. The new assortment delivers improved accuracy and extended bearing service life when compared to previous designs.

**Table 1** on **page 48** and **49** provides an overview of the new assortment of SKF super-precision bearings.

## Super-precision angular contact ball bearings

### Bearings in the 718 (SEA) series

Bearings in the 718 (SEA) series provide optimum performance in applications where a low cross section and high degree of rigidity, speed and superior accuracy are critical design parameters. They are particularly suitable for machine tool applications, multi-spindle drilling heads, robotic arms, measuring devices, racing car wheels and other precision applications. The standard assortment accommodates shaft diameters ranging from 10 to 160 mm.

### Bearings in the 719 .. D (SEB) and 70 .. D (EX) series

For applications where a high load carrying capacity is an additional operational requirement, SKF offers high-capacity bearings in the 719 .. D (SEB) and 70 .. D (EX) series. The ability of the new design super-precision bearings in these two series to accommodate heavy loads in applications where radial space is often limited, makes them an excellent choice for demanding applications. Open bearings in the 719 .. D (SEB) series accommodate shaft diameters ranging from 10 to 360 mm; sealed bearings from 10 to 150 mm.

Open bearings in the 70 .. D (EX) series accommodate shaft diameters ranging from 6 to 240 mm; sealed bearings from 10 to 150 mm.

### Bearings in the S719 .. B (HB .. /S) and S70 .. B (HX .. /S) series

High-speed sealed bearings in the S719 .. B (HB .. /S) and S70 .. B (HX .. /S) series can virtually eliminate the problem of premature bearing failures resulting from contamination. The standard assortment accommodates shaft diameters ranging from 30 to 120 mm. These relubrication-free bearings are particularly suitable for metal cutting and woodworking machines. The bearings are also available in an open variant.



### Bearings in the 72 .. D (E 200) series

High-capacity bearings in the 72 .. D (E 200) series offer solutions to many bearing arrangement challenges. Their ability, among others, to provide a high degree of rigidity and accommodate heavy loads at relatively high speeds, is beneficial for a variety of applications. The extended range of bearings in this series now accommodates shaft diameters ranging from 7 to 140 mm. And, there is also a relubrication-free, sealed variant, available on request.



## Bearings made from NitroMax steel

In extremely demanding applications such as high-speed machining centres and milling machines, bearings are frequently subjected to difficult operating conditions such as very high speeds, thin-film lubrication conditions, and contaminated and corrosive environments. To enable longer bearing service life and reduce the costs associated with downtime, SKF has developed a superior high-nitrogen steel.

The SKF assortment of super-precision angular contact ball bearings made from NitroMax steel have ceramic (bearing grade silicon nitride) rolling elements as standard.

## Super-precision cylindrical roller bearings

SKF produces super-precision single row and double row cylindrical roller bearings. The characteristic features of these bearings are a low cross sectional height, high load carrying capacity, high rigidity and high-speed capability. They are therefore particularly well suited for machine tool spindles where the bearing arrangement must accommodate heavy radial loads and high speeds, while providing a high degree of stiffness.

Single row cylindrical roller bearings are produced in the N 10 series as basic design bearings and as high-speed design bearings. High-speed single row cylindrical roller bearings in the N 10 series are available with a tapered bore only and for shaft diameters ranging from 40 to 80 mm. Compared to previous high-speed design, they can accommodate a speed increase of up to 30% in grease lubricated applications and up to 15% in oil-air lubricated applications.

Double row cylindrical roller bearings are produced as standard in the NN design and NNU design.



## Super-precision double direction angular contact thrust ball bearings

Double direction angular contact bearings, as their name implies, were developed by SKF to axially locate machine tool spindles in both directions.

The new optimized design of super-precision bearings in the BTW series consists of a set of two single row angular contact thrust ball bearings, arranged back-to-back. This configuration enables the bearings to accommodate axial loads in both directions while providing a high degree of system rigidity. These bearings can accommodate higher speeds compared to bearings in the former 2344(00) series. The bearings are available for shaft diameters ranging from 35 to 200 mm.

The redesigned high-speed BTM series accommodate higher speeds, anywhere from 6% to 12% depending on the size; minimize heat generation, even at higher speeds; provide high load carrying capacity and maintain a high degree of system rigidity. The range of BTM bearings series has been expanded to accommodate shaft diameters from 60 to 180 mm.



## Super-precision angular contact thrust ball bearings for screw drives

Single direction angular contact thrust ball bearings in the BSA and BSD (BS) series are available for shaft diameters ranging from 12 to 75 mm. These bearings are characterized by superior axial stiffness and high axial load carrying capacity.

Double direction angular contact thrust ball bearings in the BEAS series have been developed for machine tool applications where space is tight and easy mounting is required. The bearings are available for shaft diameters ranging from 8 to 30 mm. Bearings in the BEAM series, which can accommodate shaft diameters ranging from 12 to 60 mm, can be bolt-mounted to an associated component.

Cartridge units are another solution for simple and quick mounting. Units in the FBSA (BSDU and BSQU) series incorporate SKF single direction angular contact thrust ball bearings and can accommodate shaft diameters ranging from 20 to 60 mm.

## Super-precision axial-radial cylindrical roller bearings

SKF axial-radial cylindrical roller bearings are suitable for arrangements that have simultaneously acting (radial and axial) loads as well as moment loads.










Their internal design, together with close tolerance manufacturing processes, enable these bearings to attain better than P4 running accuracy.

Axial-radial cylindrical roller bearings are commonly used to support rotating tables, indexing tables and milling heads.



Table 1











## Overview of SKF super-precision bearings

ISO dimension series	Bearing type and design SKF publication <sup>1,2)</sup>		Variant	SKF assortment SKF bearings in the series	
18	<b>Angular contact ball bearings: Basic design</b> <i>Super-precision angular contact ball bearings: 718 (SEA) series (Publication No. 06810)</i>		Open	All-steel Hybrid	718 .. D (SEA) 718 .. D/H/C (SEA /NS)
			Open	All-steel Hybrid	719 .. B (HB) 719 .. B/H/C (HB /NS)
			Sealed	All-steel Hybrid	S719 .. B (HB /S) S719 .. B/H/C (HB /S/NS)
				Open	All-steel Hybrid
Sealed	All-steel Hybrid	S719 .. E (VEB /S) S719 .. E/H/C (VEB /S/NS)			
19	<b>Angular contact ball bearings: High-speed, B design</b> <i>Super-precision angular contact ball bearings: High-speed, B design, sealed as standard (Publication No. 06939)</i>		Open	All-steel Hybrid	719 .. D (SEB) 719 .. D/H/C (SEB /NS)
			Sealed	All-steel Hybrid	S719 .. D (SEB /S) S719 .. D/H/C (SEB /S/NS)
			Open	All-steel Hybrid	70 .. B (HX) 70 .. B/H/C (HX /NS)
			Sealed	All-steel Hybrid	S70 .. B (HX /S) S70 .. B/H/C (HX /S/NS)
10	<b>Angular contact ball bearings: High-speed, E design</b> <i>Super-precision angular contact ball bearings: High-speed, E design (Publication No. 10112)</i>		Open	All-steel Hybrid	70 .. E (VEX) 70 .. E/H/C (VEX /NS)
			Sealed	All-steel Hybrid	S70 .. E (VEX /S) S70 .. E/H/C (VEX /S/NS)
			Open	All-steel Hybrid	70 .. D (EX) 70 .. D/H/C (EX /NS)
			Sealed	All-steel Hybrid	S70 .. D (EX /S) S70 .. D/H/C (EX /S/NS)
02	<b>Angular contact ball bearings: High-capacity, basic design</b> <i>Super-precision angular contact ball bearings: High-capacity (Publication No. 06981)</i>		Open	All-steel Hybrid	72 .. D (E 200) 72 .. D/H/C (E 200 /NS)
			Sealed	All-steel Hybrid	S72 .. D (E 200 /S) S72 .. D/H/C (E 200 /S/NS)
			Open	All-steel	NNU 49 BK
			Sealed	All-steel	

<sup>1)</sup> Where applicable, information can be found in the SKF publication *High-precision bearings* (Publication No. 6002).<sup>2)</sup> For additional information about super-precision angular contact ball bearings made from NitroMax steel, refer to the SKF publication *Extend bearing service life with NitroMax* (Publication No. 10126).

cont. Table 1

## Overview of SKF super-precision bearings

ISO dimension series	Bearing type and design <i>SKF publication<sup>1,2)</sup></i>		Variant		SKF assortment SKF bearings in the series
10	<b>Single row cylindrical roller bearings: Basic design</b>		Open	All-steel Hybrid	N 10 KTN N 10 KTN/HC5
	<b>Single row cylindrical roller bearings: High-speed design</b> <i>Super-precision cylindrical roller bearings: High-speed (Publication No. 07016)</i>		Open	All-steel Hybrid	N 10 KPHA N 10 KPHA/HC5
30	<b>Double row cylindrical roller bearings: NN design</b>		Open	All-steel Hybrid	NN 30 KTN NN 30 KTN/HC5
– (Non-standardized)	<b>Angular contact thrust ball bearings: Double direction, basic design</b> <i>Super-precision double direction angular contact thrust ball bearings (Publication No. 10097)</i>		Open	All-steel Hybrid	BTW BTW /HC
	<b>Angular contact thrust ball bearings: Double direction, high-speed design</b> <i>Higher-speed capability with the new BTM bearing series design (Publication No. 12119)</i>		Open	All-steel Hybrid	BTM BTM /HC
02	<b>Angular contact thrust ball bearings: Single direction</b> <i>Super-precision angular contact thrust ball bearings for screw drives (Publication No. 06570)</i>		Open Sealed	All-steel All-steel	BSA 2 (BS 200) BSA 2 .. (BS 200 ..)
03	<b>Angular contact thrust ball bearings: Single direction</b> <i>Super-precision angular contact thrust ball bearings for screw drives (Publication No. 06570)</i>		Open Sealed	All-steel All-steel	BSA 3 (BS 3) BSA 3 .. (BS 3 ..)
– (Non-standardized)	<b>Angular contact thrust ball bearings: Single direction</b> <i>Super-precision angular contact thrust ball bearings for screw drives (Publication No. 06570)</i>		Open Sealed	All-steel All-steel	BSD (BS ..) BSD .. (BS ..)
	<b>Angular contact thrust ball bearings: Double direction</b>		Sealed	All-steel	BEAS (BEAS) BEAM (BEAM)
	<b>Cartridge unit with angular contact thrust ball bearings</b>		Sealed	All-steel	FBSA (BSDU, BSQU) –

<sup>1)</sup> Where applicable, information can be found in the SKF publication *High-precision bearings* (Publication No. 6002).

<sup>2)</sup> For additional information about super-precision angular contact ball bearings made from NitroMax steel, refer to the SKF publication *Extend bearing service life with NitroMax* (Publication No. 10126).

# SKF – the knowledge engineering company

From one simple but inspired solution to a misalignment problem in a textile mill in Sweden, and fifteen employees in 1907, SKF has grown to become a global industrial knowledge leader.



Over the years we have built on our expertise in bearings, extending it to seals, mechatronics, services and lubrication systems. Our knowledge network includes 46 000 employees, 15 000 distributor partners, offices in more than 130 countries, and a growing number of SKF Solution Factory sites around the world.

## Research and development

We have hands-on experience in over forty industries, based on our employees' knowledge of real life conditions. In addition our world-leading experts and university partners who pioneer advanced theoretical research and development in areas including tribology, condition monitoring, asset management and bearing life theory. Our ongoing commitment to research and development helps us keep our customers at the forefront of their industries.



## Meeting the toughest challenges

Our network of knowledge and experience along with our understanding of how our core technologies can be combined helps us create innovative solutions that meet the toughest of challenges. We work closely with our customers throughout the asset life cycle, helping them to profitably and responsibly grow their businesses.

## Working for a sustainable future

Since 2005, SKF has worked to reduce the negative environmental impact from our own operations and those of our suppliers. Our continuing technology development introduced the SKF BeyondZero portfolio of products and services which improve efficiency and reduce energy losses, as well as enable new technologies harnessing wind, solar and ocean power. This combined approach helps reduce the environmental impact both in our own operations and in our customers'.


*SKF Solution Factory makes SKF knowledge and manufacturing expertise available locally, to provide unique solutions and services to our customers.*

*Working with SKF IT and logistics systems and application experts, SKF Authorized Distributors deliver a valuable mix of product and application knowledge to customers worldwide.*



## Our knowledge – your success

**SKF Life Cycle Management is how we combine our technology platforms and advanced services, and apply them at each stage of the asset life cycle, to help our customers to be more successful, sustainable and profitable.**

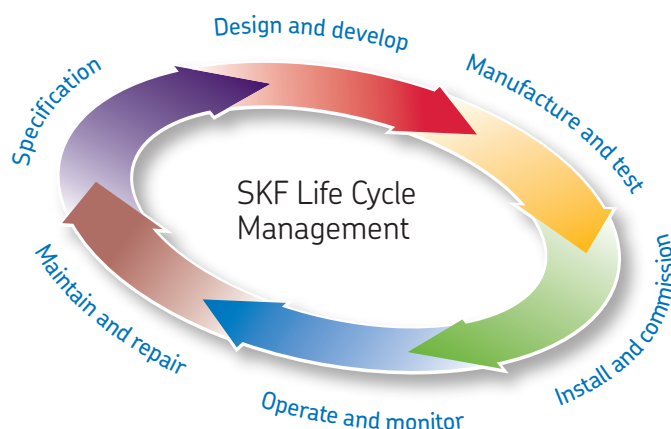

### Working closely with you

Our objective is to help our customers improve productivity, minimize maintenance, achieve higher energy and resource efficiency, and optimize designs for long service life and reliability.



### Bearings

SKF is the world leader in the design, development and manufacture of high performance rolling bearings, plain bearings, bearing units and housings.

### Innovative solutions

Whether the application is linear or rotary or a combination of the two, SKF engineers can work with you at each stage of the asset life cycle to improve machine performance by looking at the entire application. This approach doesn't just focus on individual components like bearings or seals. It looks at the whole application to see how each component interacts with the next.



### Machinery maintenance

Condition monitoring technologies and maintenance services from SKF can help minimize unplanned downtime, improve operational efficiency and reduce maintenance costs.

### Design optimization and verification

SKF can work with you to optimize current or new designs with proprietary 3-D modeling software that can also be used as a virtual test rig to confirm the integrity of the design.



### Sealing solutions

SKF offers standard seals and custom engineered sealing solutions to increase uptime, improve machine reliability, reduce friction and power losses, and extend lubricant life.



### Mechatronics

SKF fly-by-wire systems for aircraft and drive-by-wire systems for off-road, agricultural and forklift applications replace heavy, grease or oil consuming mechanical and hydraulic systems.




### Lubrication solutions

From specialized lubricants to state-of-the-art lubrication systems and lubrication management services, lubrication solutions from SKF can help to reduce lubrication related downtime and lubricant consumption.



### Actuation and motion control

With a wide assortment of products – from actuators and ball screws to profile rail guides – SKF can work with you to solve your most pressing linear system challenges.

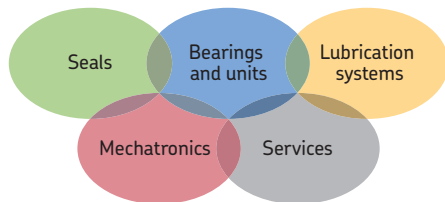

### The Power of Knowledge Engineering

Drawing on five areas of competence and application-specific expertise amassed over more than 100 years, SKF brings innovative solutions to OEMs and production facilities in every major industry worldwide. These five competence areas include bearings and units, seals, lubrication systems, mechatronics (combining mechanics and electronics into intelligent systems), and a wide range of services, from 3-D computer modelling to advanced condition monitoring and reliability and asset management systems. A global presence provides SKF customers uniform quality standards and worldwide product availability.

© SKF and SNFA are registered trademarks of the SKF Group.

© SKF Group 2012

The contents of this publication are the copyrights of the publisher and may not be reproduced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication, but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

**PUB BU/P9 10112/6 EN** · December 2012

This publication supersedes all information about SKF bearings in the 719 .. E and 70 .. E series in the SKF publication *High-precision bearings* (Publication No. 6002) and SNFA bearings in the VEB and VEX series in the *SNFA General Catalogue*.

Certain image(s) used under license from Shutterstock.com

