




— Extreme Special Environment Bearings Compatible with Advanced Applications —

EXSEV Bearing Series Product Guidebook

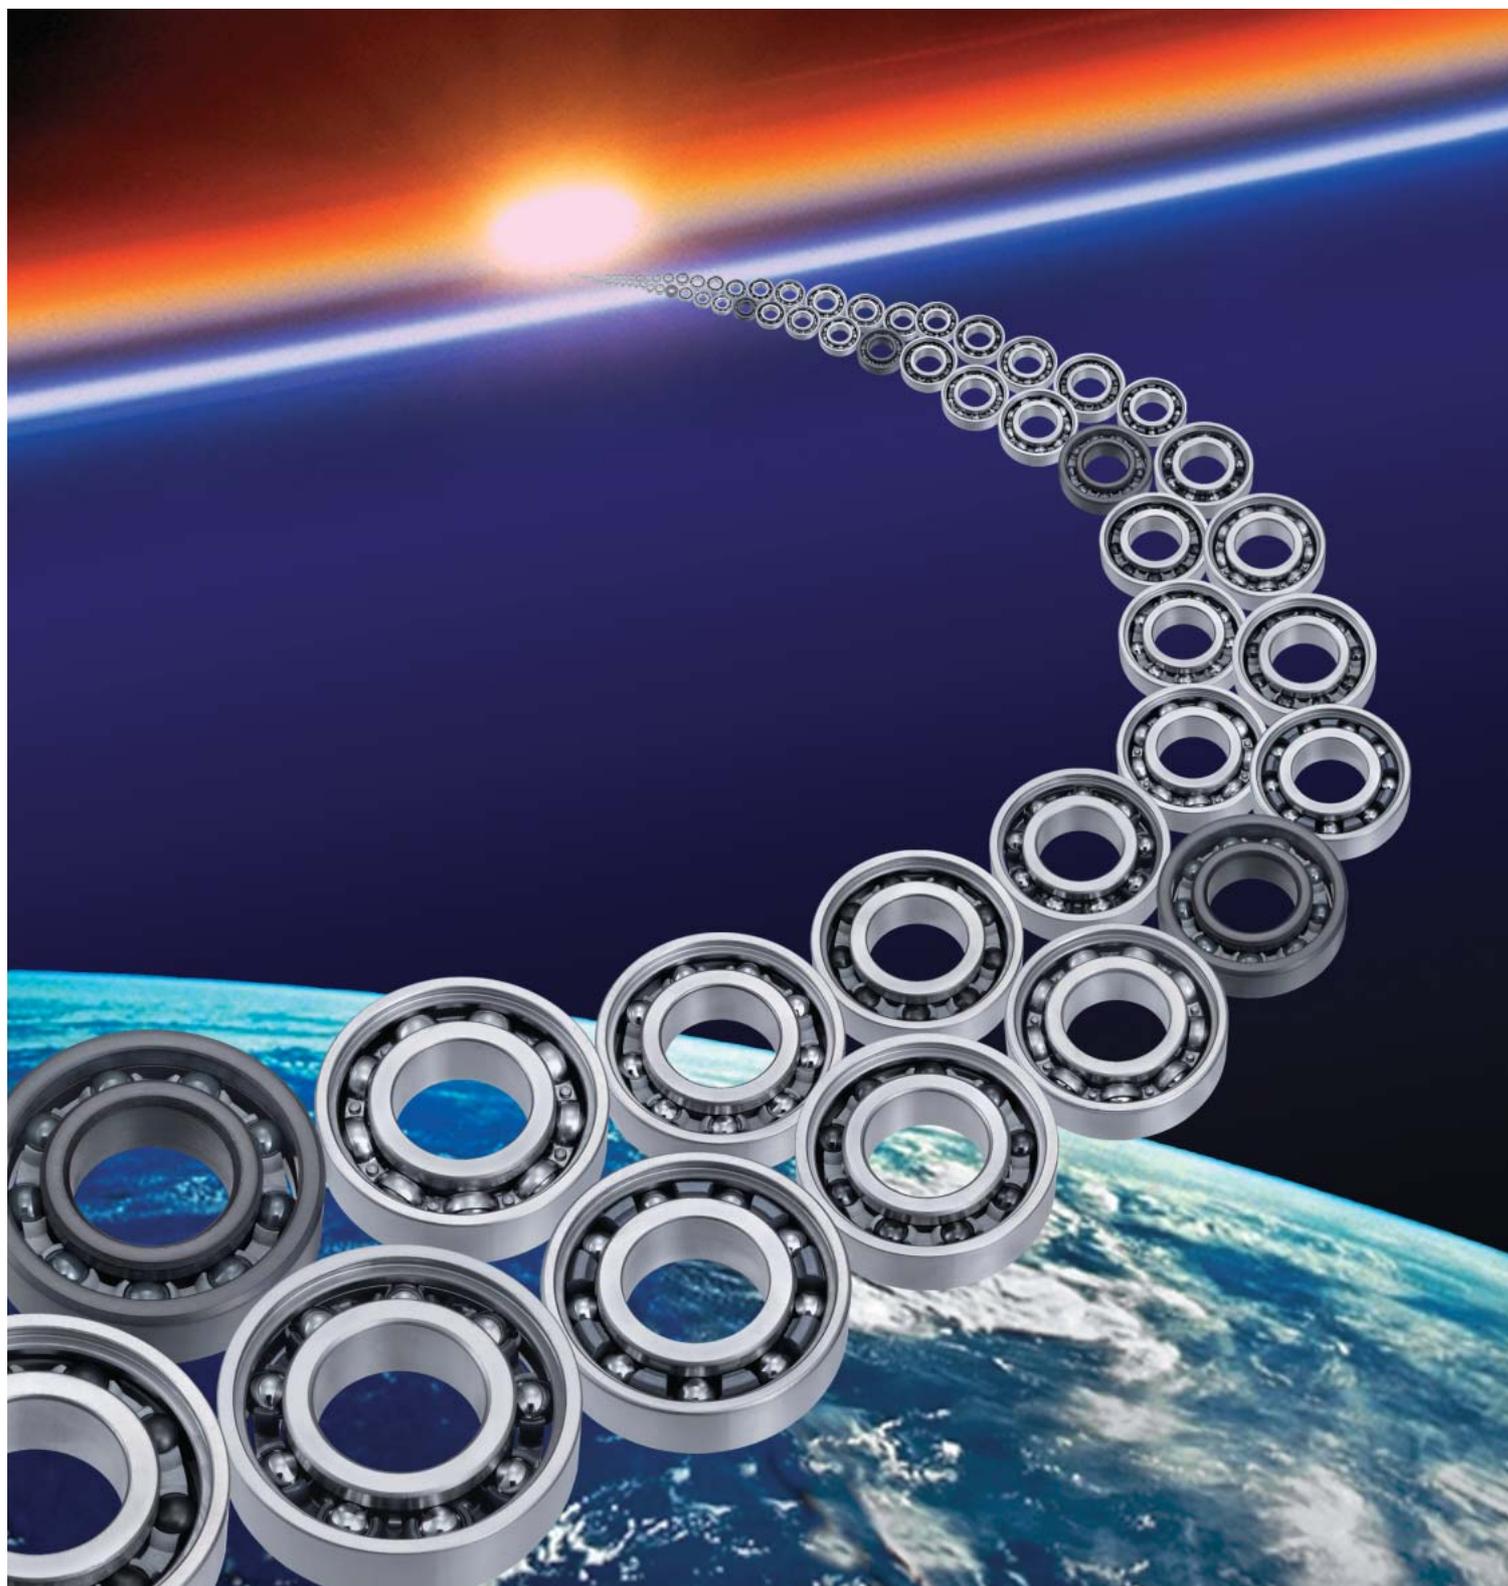

KOYO SEIKO CO., LTD.


CAT.NO.457E

EXSEV Bearing Series Product Guidebook


The Koyo EXSEV Bearing Series is a collection of high-performance bearings compatible with special operating environments and conditions, where conventional bearings are not applicable.

From among our varied collection of EXSEV Series bearings, this Guidebook includes products that are especially contributory to the semiconductor industry, such as in clean-room or vacuum-chamber applications.

Koyo is certain that the high-performance EXSEV Bearing Series, which is the materialization of new values, will assist the many engineers who pioneer unexplored fields beyond the boundaries of the normal semiconductor industry.

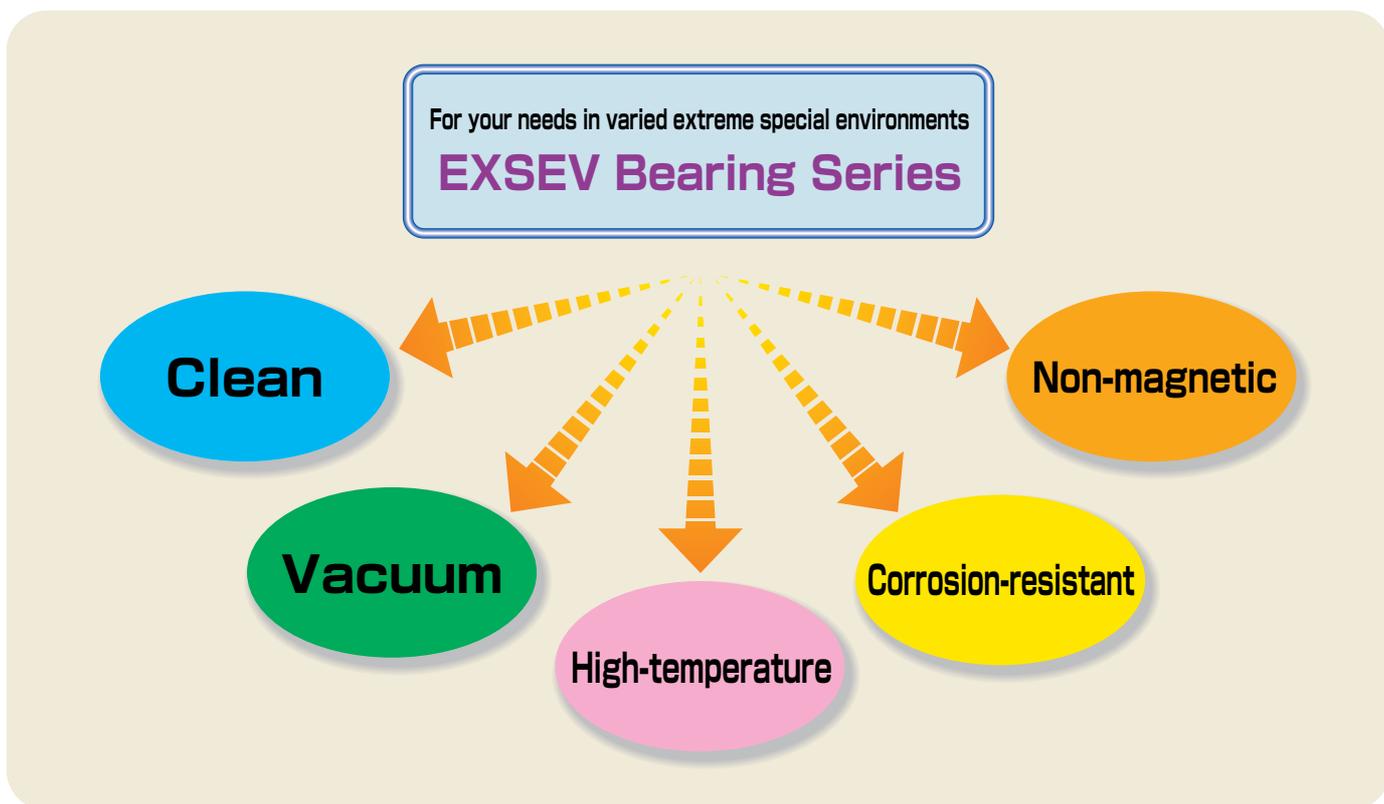

The information given in this catalog is subject to change without prior notice, to include future improvements of the bearings.
Koyo pays close attention to the correctness of the information given in this catalog. Nonetheless, we disclaim liability for any damage resulting from errors, omissions, or missing pages in this catalog.

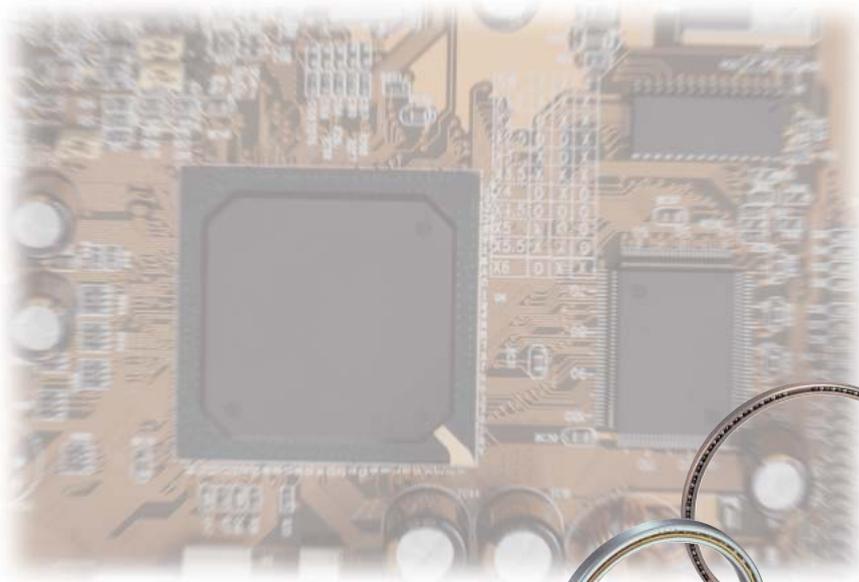

Contents

Deep Groove Ball Bearings (Angular Contact Ball Bearings)

- HD Bearings.....1
- FA Bearings.....1
- Clean Pro Bearings.....2
- High-temperature Clean Pro Bearings.....2
- DL Bearings.....3
- PN Bearings.....3
- MO Bearings.....4
- WS Bearings.....4
- MG Bearings.....5
- High-temperature Hybrid Ceramic Bearings.....5
- Full Complement Ceramic Ball Bearings (Angular Contact Ball Bearings).....6
- SK Bearings.....6
- Corrosive-resistant SL Bearings.....7
- Corrosion-resistant Hybrid Ceramic Bearings.....7
- Ceramic Bearings.....8
- Corrosion-resistant Ceramic Bearings.....8
- Highly Corrosion-resistant Ceramic Bearings.....9
- Non-magnetic Hybrid Ceramic Bearings.....9
- High-speed/Insulated Hybrid Ceramic Bearings.....10

K Series Ultra Thin-section Ball Bearings

- Full Complement Hybrid Ceramic Ball Bearings.....10

Linear Motion Bearings

- Clean Pro Linear Ball Bearings and Linear Way Bearing Units.....11
- DL Linear Ball Bearings and Linear Way Bearing Units.....11
- MO Linear Ball Bearings.....12

EXSEV Bearing Number Table.....13

Characteristics of Typical EXSEV Bearings.....15

HD Bearings



Typical bearing number


SV6003ZZST YS

Advantages

The HD Bearings packed with an appropriate amount of lithium-base KHD grease, which is low in particle emissions.

Lubricated with grease, the HD Bearings offer superior lubrication reliability.

Specifications

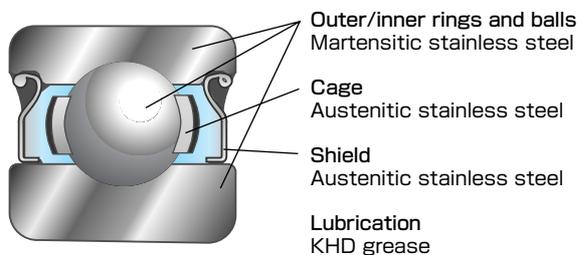

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure
- Temperature : -30 to 120 °C
- Limiting speed : $dn < 5000$ ²⁾

Applications

Carrier systems
Food-processing systems
Cleaning systems

FA Bearings



Typical bearing number


SE6003ZZST FA

Advantages

The FA Bearings are lubricated with a solid fluoropolymer lubricant, which offers superior lubrication performance.

The cage is made from a low-particle-emission fluorocarbon resin.

Specifications

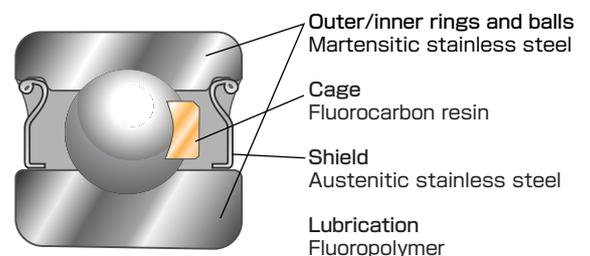

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 200 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating ³⁾

Applications

Semiconductor manufacturing systems
LCD manufacturing systems
Carrier systems
Inspection systems

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

2) When used in an environment where cleanliness is not a significant factor, the product can be used at higher speed, reaching the same limiting speed as that of standard products.

3) The permissible radial load indicates the approximate size of radial load the bearing can carry. If the bearing carries an axial load, the permissible radial load may be lower.

Clean Pro Bearings



Typical bearing number


SE6003ZZSTPR YS

Advantages

The Clean Pro Bearings are finished with Clean Pro coating, which serves as the solid lubricant.

The Clean Pro coating provides excellent lubrication and is low in particle and gas emissions, making the Clean Pro Bearings useful in clean-room applications.

Specifications

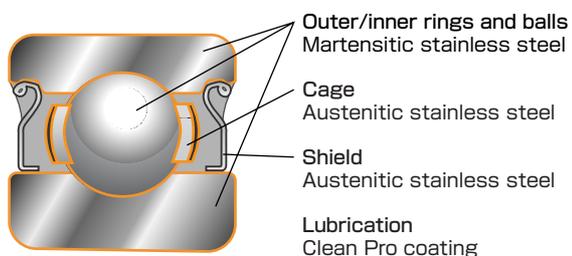

Performance

- Cleanliness : Class 10¹⁾ ; chemically clean
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : - 100 to 200 °C
- Limiting speed : dn < 10000 ; 1000 min⁻¹ max.
- Permissible radial load : ≤ 3% of the basic dynamic load rating³⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Carrier systems
 Inspection and analysis systems
 Rotary drives
 Vacuum motors

High-temperature Clean Pro Bearings



Typical bearing number


SE6003ZZSTPRB YS

Advantages

The High-temperature Clean Pro Bearings are an upgraded version of the reliable Clean Pro Bearings, which have an excellent record in clean-room applications.

With improved heat resistance, the High-temperature Clean Pro Bearings offer an expanded operating temperature range of up to 260 °C.

Specifications

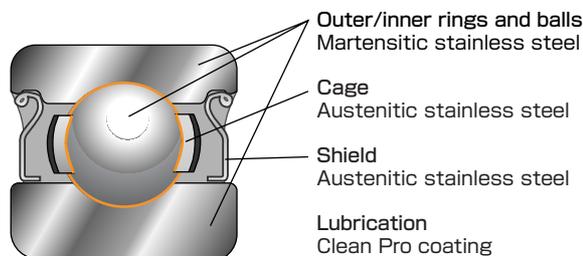

Performance

- Cleanliness : Class 10¹⁾
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : - 100 to 260 °C
 The long service life of the High-temperature Clean Pro Bearings is especially significant in an environment where temperatures exceed 200 °C.
- Limiting speed : dn < 10000 ; 1000 min⁻¹ max.
- Permissible radial load : ≤ 3% of the basic dynamic load rating³⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Vacuum evaporators
 Hard-disk manufacturing systems

DL Bearings



Typical bearing number

SV6003ZZST YS


Advantages

The DL Bearings packed with an appropriate amount of KDL grease (fluorine base), which is suitable for vacuum environments.

The low-particle-emission DL Bearings are suitable for use in a clean environment as well.

Lubricated with grease, the DL Bearings ensure superior lubrication reliability.

Specifications

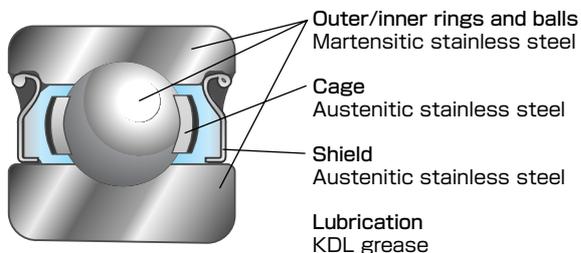

Performance

- Cleanliness : Class 100 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -30 to 200 °C
- Limiting speed : $dn < 40000$ ²⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Carrier robots
 Vacuum pumps

PN Bearings



Typical bearing number


SE6003ZZST PN

Advantages

The PN Bearings are solid-lubricant bearings, provided with a solid lubricant and fluoropolymer.

The cage is made from a highly heat-resistant PEEK (poly-ether-ether-ketone) resin, enabling the bearings to operate stably under high temperatures.

Specifications

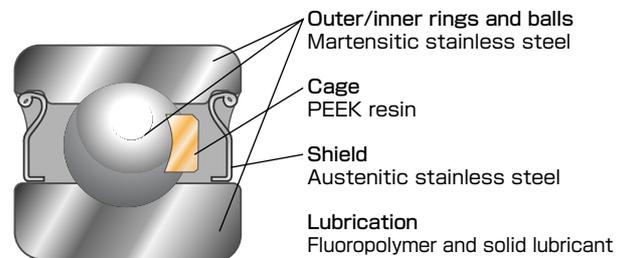

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -30 to 300 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 3\%$ of the basic dynamic load rating ³⁾

Applications

Drink-carton manufacturing systems
 LCD washing systems

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

2) When used in an environment where cleanliness is not a significant factor, the product can be used at higher speed, reaching the same limiting speed as that of standard products.

3) The permissible radial load indicates the approximate size of radial load the bearing can carry. If the bearing carries an axial load, the permissible radial load may be lower.

MO Bearings



Typical bearing number


SE6003ZZSTMSA7 YS

Advantages

The MO Bearings are solid-lubricant bearings, lubricated with molybdenum disulfide coating.

They are superior to polymer-lubricated bearings in load-carrying performance and lubrication performance.

Specifications

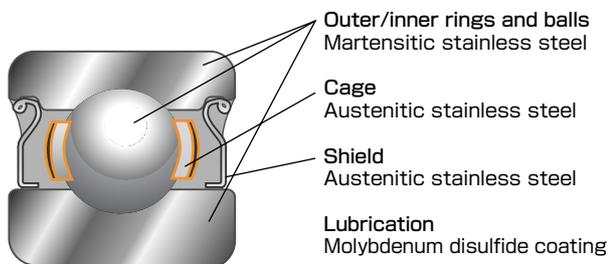

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 300 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 3\%$ of the basic dynamic load rating ²⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Vacuum evaporators
 Turbo-molecular pump
 Rotary furnaces

WS Bearings



Typical bearing number

SE6003ZZST WS


Advantages

The WS Bearings are solid-lubricant bearings, lubricated with tungsten disulfide.

They have excellent heat resistance and load-carrying performance.

These bearings have a tungsten disulfide-including separator, in place of a cage, keeping the balls equally spaced.

Specifications

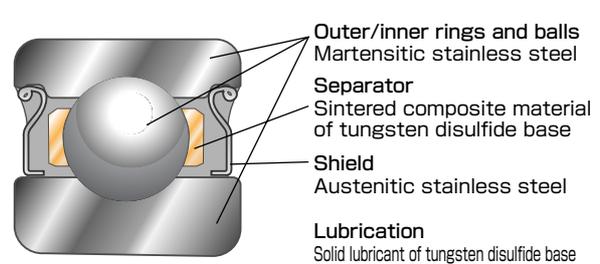

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 350 °C
- Limiting speed : $dn < 4000$; 500 min^{-1} max.
- Permissible radial load : $\leq 5\%$ of the basic dynamic load rating ³⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Vacuum evaporators
 PDP manufacturing systems

Vacuum

MG Bearings



Typical bearing number


SE6003ZZSTMG3 YS

Advantages

The MG Bearings are solid-lubricant bearings, lubricated with the silver-ion plating on the rolling elements (balls).

They are suitable for ultra-high vacuum applications, because gas emissions are very low.

Specifications

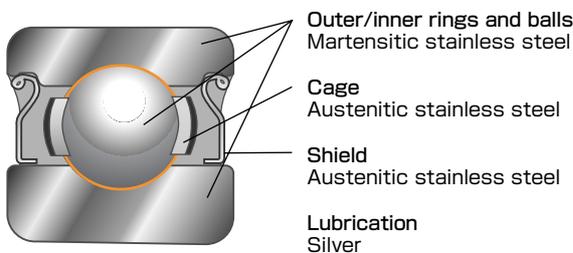

Performance

- Cleanliness : —
- Ambient pressure : 10^{-3} to 10^{-10} Pa
- Temperature : -200 to 350 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 3\%$ of the basic dynamic load rating ²⁾

Applications

- Semiconductor manufacturing systems
- LCD manufacturing systems
- Vacuum evaporators
- Vacuum motors
- Medical equipment

High-temperature

High-temperature Hybrid Ceramic Bearings



Typical bearing number


3NC6003HT4 GF

Advantages

The High-temperature Hybrid Ceramic Bearings have bearing rings made from excellently heatproof high-speed tool steel with ceramic rolling elements (balls).

These bearings are solid-lubricant bearings, with the cage made from highly heat-resistant graphite, which serves as the lubricant.

Specifications

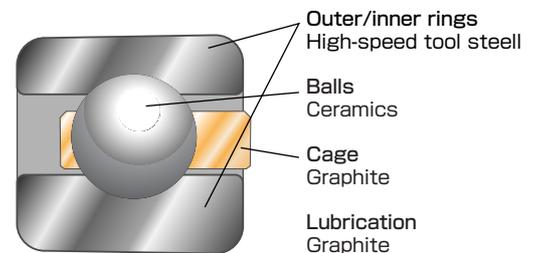

The cage protruding on one side.

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure
- Temperature : -100 to 500 °C
- Limiting speed : $dn < 4000$; 500 min^{-1} max.
- Permissible radial load : $\leq 3\%$ of the basic dynamic load rating ²⁾

Applications

- Carrier systems in baking furnaces
- Bogies in heating furnaces

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

2) The permissible radial load indicates the approximate size of radial load the bearing can carry. If the bearing carries an axial load, the permissible radial load may be lower.

Refer to the table at the end of the guidebook for each product's basic dynamic load rating (Cr).

Full Complement Ceramic Ball Bearings

(Angular Contact Ball Bearings)



Typical bearing number

NC7003V

Advantages


The Full Complement Ball Bearings are the ultimate result of our commitment to heat resistance.

The configuration of these bearings is of angular contact ball bearings.

The bearing rings and rolling elements (balls) are made of ceramic.

No cage is provided.

Specifications



Outer/inner rings and balls
Ceramics

Cage
Not provided

Lubrication
Not provided

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10^{-10} Pa
- Temperature : -200 to 800 °C
- Limiting speed : $dn < 4000$; 500 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating²⁾

Applications

Carrier systems in baking furnaces
Fans in furnaces

SK Bearings



Typical bearing number


SK6003ZZST YS

Advantages

The SK Bearings are suitable for use in slightly corrosive environments.

The bearing rings and rolling elements (balls) are made from martensitic stainless steel, with an appropriate amount of lithium-base KHD grease sealed in.

Specifications



Outer/inner rings and balls
Martensitic stainless steel

Cage
Austenitic stainless steel

Shield
Austenitic stainless steel

Lubrication
KHD grease

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure
- Temperature : -30 to 120 °C

Applications

Chemical processing systems
Carrier systems

Corrosion-resistant

Corrosion-resistant SL Bearings



Typical bearing number


SL6003ZZMD4 FA

Advantages

With precipitation-hardened stainless steel bearing rings and carbon rolling elements (balls), the SL Bearings are useful in corrosive environments.

These bearings are solid-lubricant bearings, lubricated with carbon and fluoropolymer.

Specifications

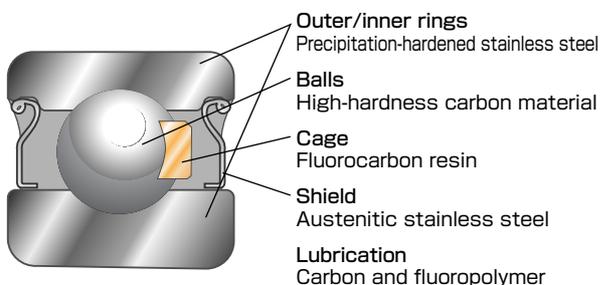

Performance

- Cleanliness : 100 ¹⁾
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : -100 to 200 °C
- Limiting speed : dn < 4000 ; 500 min⁻¹ max.
- Permissible radial load : ≤ 0.3% of the basic dynamic load rating ²⁾

Applications

- Film manufacturing systems
- Electronic-device manufacturing systems
- Washing systems
- Chemical processing systems

Corrosion-resistant Hybrid Ceramic Bearings



Typical bearing number


3NC6003MD4 FA

Advantages

With the precipitation-hardened stainless steel bearing rings and ceramic rolling elements (balls), the Hybrid Ceramic Bearings are useful in corrosive environments.

These bearings are solid-lubricant bearings, lubricated with fluoropolymer.

Specifications

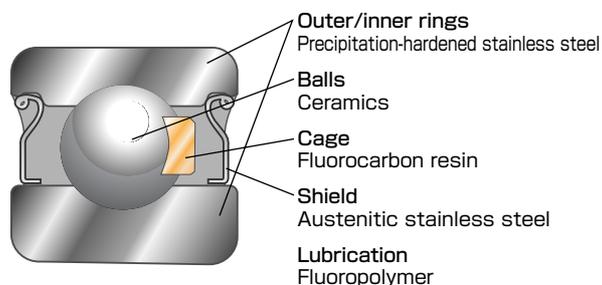

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : -100 to 200 °C
- Limiting speed : dn < 10000 ; 1000 min⁻¹ max.
- Permissible radial load : ≤ 1% of the basic dynamic load rating ²⁾

Applications

- Semiconductor manufacturing systems
- Chemical processing systems
- Food machinery
- Washing systems

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

2) The permissible radial load indicates the approximate size of radial load the bearing can carry. If the bearing carries an axial load, the permissible radial load may be lower.

Refer to the table at the end of the guidebook for each product's basic dynamic load rating (Cr).

Ceramic Bearings



Typical bearing number


NC6003 FA

Advantages

The ceramic-made bearing rings and rolling elements (balls) make the Ceramic Bearings useful in corrosive environments.

These bearings are solid-lubricant bearings lubricated with fluoropolymer.

Specifications

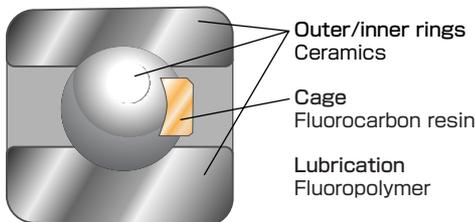

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 200 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating ²⁾

Applications

Semiconductor manufacturing systems
 LCD manufacturing systems
 Semiconductor inspection systems
 Synthetic-fiber manufacturing systems
 Canning systems
 Ultrasonic motors

Corrosion-resistant Ceramic Bearings



Typical bearing number


NCT6003 FA

Advantages

With both the bearing rings and rolling elements (balls) made from highly corrosion-resistant silicon nitride ceramics, the Corrosion-resistant Ceramic Bearings are compatible with corrosive environments.

These bearings are solid-lubricant bearings lubricated with fluoropolymer.

Specifications

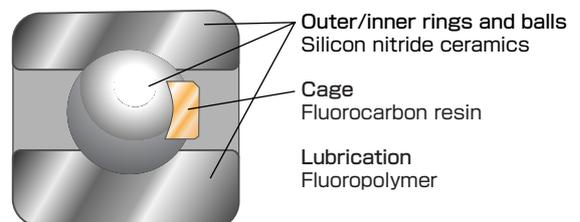

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 200 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating ²⁾

Applications

Liquid-crystal-film processing systems
 Aluminum-foil capacitor processing systems
 Plating systems
 Synthetic-fiber manufacturing systems
 Food-container washing systems

Corrosion-resistant

Highly Corrosion-resistant Ceramic Bearings



Typical bearing number

NCZ6003 FA


Advantages

These bearings are resistant to strong acid and alkaline solutions as well.

Having the bearing rings and rolling elements (balls) made from highly corrosion-resistant silicon-carbide ceramics, the Highly Corrosion-resistant Ceramic Bearings are compatible with corrosive environments.

These bearings are solid-lubricant bearings lubricated with fluoropolymer.

Specifications

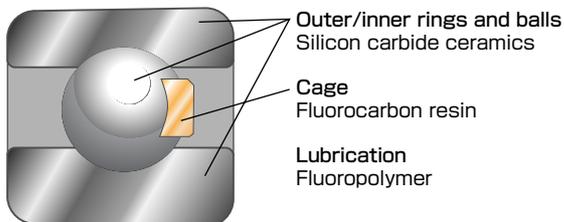

Performance

- Cleanliness : Class 100 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 200 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating ²⁾

Applications

Aluminum-foil capacitor manufacturing systems

Non-magnetic

Non-magnetic Hybrid Ceramic Bearings



Typical bearing number


3NC6003YH4 FA

Advantages

The Non-magnetic Hybrid Ceramic Bearings have non-magnetic stainless steel bearing rings and ceramic balls.

These bearings are solid-lubricant bearings lubricated with fluoropolymer.

Specifications

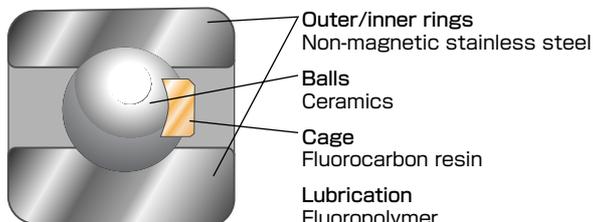

Performance

- Cleanliness : Class 1000 ¹⁾
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : -100 to 200 °C
- Limiting speed : $dn < 10000$; 1000 min^{-1} max.
- Permissible radial load : $\leq 1\%$ of the basic dynamic load rating ²⁾

Applications

Semiconductor manufacturing systems
 Semiconductor inspection systems
 Canning systems
 Superconductivity-related systems
 Welding

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

2) The permissible radial load indicates the approximate size of radial load the bearing can carry. If the bearing carries an axial load, the permissible radial load may be lower.

Refer to the table at the end of the guidebook for each product's basic dynamic load rating (Cr).

High-speed Insulation

K Series Ultra Thin-section Ball Bearings

High-speed / Insulated Hybrid Ceramic Bearings



Typical bearing number

3NC6003 FG


Advantages

The High-speed Insulating Hybrid Ceramic Bearings have ceramic rolling elements (balls).

The lightweight ceramic balls produce low centrifugal force, making these bearings suitable for high-speed rotation.

The ceramic balls insulate the outer ring and the inner ring enabling the bearings to be used in environments where electrical pitting is possible.

Specifications

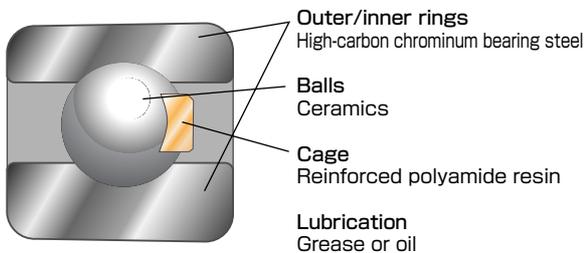

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure
- Temperature : -30 to 120 °C
- Limiting speed : Equal to or higher than 1.2 times the limiting speed of standard bearings

Applications

- Hard disk drives
- Motor spindles
- High-speed stranding machine guide rolls

Full Complement Hybrid Ceramic Ball Bearings



Typical bearing number


3NCKAA060V

Advantages

The Full Complement Hybrid Ceramic Ball Bearings have ceramic rolling elements (balls).

In place of a cage, a stainless-steel separator guides the ceramic balls, reducing particle emissions and making the bearings suitable for clean environments.

Specifications

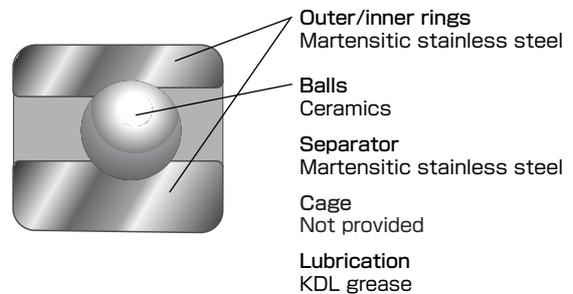

Performance

- Cleanliness : Class 100 ¹⁾
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : -30 to 200 °C

Applications

- Wafer-carrier robots

Linear Motion Bearings

Clean Pro Linear Ball Bearings / Linear Way Bearing Units

(Linear Ball Bearings)

(Linear Way Bearing Units)



Typical bearing number

(Linear Ball Bearings) **SESDM10ST5PR12**
 (Linear Way Bearing Units) **SELWHS20C2R500PR**


Advantages

Both the Linear Ball Bearings and Linear Way Bearing Units are solid-lubricant bearings lubricated by means of the Clean Pro coating.


The Clean Pro coating has superior lubrication performance and is low in particle and emissions, making the bearings useful in clean environments.

Specifications

(Linear Ball Bearings)

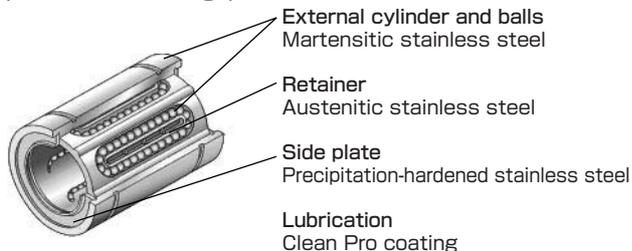

(Linear Way Bearing Units)

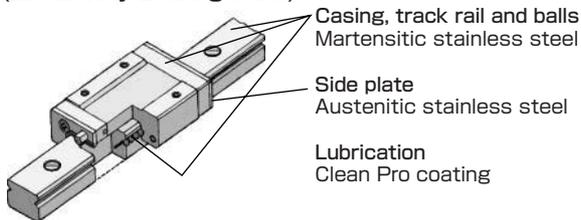

Performance

- Cleanliness : Class 100 ¹⁾
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : -100 to 200 °C

DL Linear Ball Bearings / Linear Way Bearing Units

(Linear Ball Bearings)

(Linear Way Bearing Units)



Typical bearing number

(Linear Ball Bearings) **SVSDM10ST5**
 (Linear Way Bearing Units) **SVLWHS20C2R500**


Advantages

Both the Linear Ball Bearings and Linear Way Bearing Units seal in an appropriate amount of KDL grease (fluorine base), which is low in particle emissions.


These bearings are suitable for vacuum applications and in high-temperature environments.

Specifications

(Linear Ball Bearings)

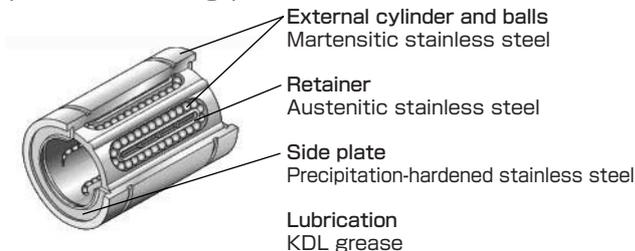

(Linear Way Bearing Units)

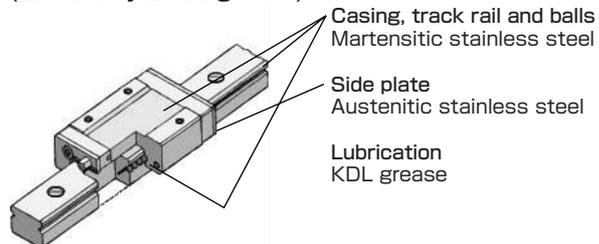

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10⁻⁵ Pa
- Temperature : -30 to 200 °C

1) The cleanliness class number represents specific environments where the individual products are useful. The cleanliness of the products themselves may vary depending on operating conditions.

MO Linear Ball Bearings



Typical bearing number

SESDM12ST5MSA7


Advantages

The MO Linear Ball Bearings are lubricated with molybdenum disulfide, which is a solid lubricant.

These bearings are suitable for high-temperature, vacuum applications.

They are superior to polymer-lubricated bearings in load-carrying performance and lubrication performance.

Specifications

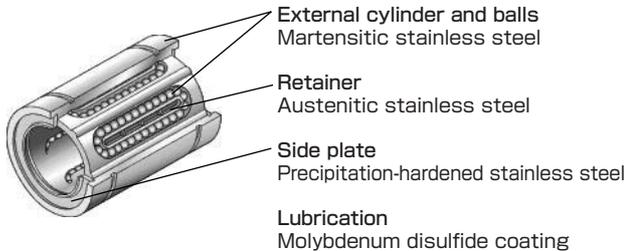

Performance

- Cleanliness : —
- Ambient pressure : Atmospheric pressure to 10^{-5} Pa
- Temperature : - 100 to 300 °C



Warning

- The EXSEV products that can be used for clean applications are seal-packaged. They are not to be unpacked until immediately before they are assembled in the systems.
- When handling bearings, wear polyethylene gloves or other appropriate material to keep the bearings free from oil stains or dust.
- Do not apply grease, oil, or other solid lubricants into the bearings, either before or during system operation.
- When the bearings are to be stored, place the bearings in a sealed, dry container, and store at room temperature, whether the bearing package has been opened or not.

EXSEV Bearing Number Table

Delivery guideline (Ex-factory basis)
■ Available from stock
■ 30 days after receiving an order
■ 45 days after receiving an order
■ Determined after consultation on each inquiry

Boundary dimensions (mm)			Basic load ratings (kN)		Series	HD Bearings	FA Bearings	Clean Pro Bearings	High-temperature Clean Pro Bearings	DL Bearings	PN Bearings	MO Bearings	WS Bearings	MG Bearings	High-temperature Hybrid Ceramic Bearings	Full Complement Ceramic Bearings (Angular Contact Ball Bearings)	SK Bearings	Corrosion-resistant SL Bearings	Corrosion-resistant Hybrid Ceramic Bearings	Ceramic Bearings	Corrosion-resistant Ceramic Bearings	Highly corrosion-resistant Ceramic Bearings	Non-magnetic Hybrid Ceramic Bearings	High-speed Insulating Hybrid Ceramic Bearings
Bore dia.	Outside dia.	Width	Cr	C0r	Bearing number	SV	SE	SE	SE	SV	SE	SE	SE	SE	3NC	NC	SK	SL	3NC	NC	NCT	NCZ	3NC	3NC
					Prefix	ST	ST	STPR	ST	ST	ST	ST	HT4	V	ST	MD4	MD4	FA	FA	FA	FA	FA	FA	FA
					Cage code	YS	FA	YS	YS	YS	PN	YS	WS	YS	GF		YS	FA	FA	FA	FA	FA	FA	FG
4	12	4	0.97	0.36	604																			
	13	5	1.30	0.49	624																			
5	14	5	1.30	0.49	605																			
	16	5	1.75	0.67	625-5																			
6	17	6	1.95	0.74	606																			
	19	6	2.60	1.05	626																			
7	19	6	2.60	1.05	607																			
	22	7	3.30	1.35	627																			
8	22	7	3.30	1.35	608																			
	24	8	3.35	1.40	628																			
9	24	7	3.35	1.40	609																			
	26	8	4.55	1.95	629																			
9.525	22.225	7.142	2.83	1.13	EE3S																			
10	26	8	4.55	1.95	6000																			
	30	9	5.10	2.40	6200																			
12	28	8	5.10	2.40	6001																			
	32	10	6.80	3.05	6201																			
15	32	9	5.60	2.85	6002																			
	35	11	7.65	3.75	6202																			
17	35	10	6.00	3.25	6003																			
	40	12	9.55	4.80	6203																			
20	42	12	9.40	5.05	6004																			
	47	14	12.8	6.65	6204																			
25	47	12	10.1	5.85	6005																			
	52	15	14.0	7.85	6205																			
30	55	13	13.2	8.25	6006																			
	62	16	19.5	11.3	6206																			
35	62	14	15.9	10.3	6007																			
	72	17	25.7	15.4	6207																			
40	68	15	16.7	11.5	6008																			
	80	18	29.1	17.8	6208																			
Note 1) The internal clearance of the in-stock bearings is as shown on the right.						—	C3	C3	—	—	C3	—	C4	C4	—	—	C3	C3	CN	CN	CN	—	—	—
						Packed with KHD grease				Packed with KHD grease						Note 2)	Note 3)		Note 4)					

Note 2) Because the configuration of these bearings is that of angular contact ball bearings, their basic bearing number and basic load ratings differ from those shown in this table.

Note 3) Packed with KHD grease. The 6900 Series bearings are also available with these specifications.

Note 4) The bearings of the numbers marked with an asterisk have a C3 clearance.

Cleanliness, Vacuum and Heat-resistance Characteristics of the Typical EXSEV Bearings

Performance Series	Cleanliness class				Ambient pressure (Pa)				Operating temperature (°C)							Non-magnetic resistance	Insulation		
	10	100	1000	—	Atmospheric	to 10 ⁻³	to 10 ⁻⁵	to 10 ⁻¹⁰	Lower limit			Upper limit							
									-200	-100	-30	60	120	200	250			300	350
HD Bearings FA Bearings																			
Clean Pro Bearings High-temperature Clean Pro Bearings																			
DL Bearings PN Bearings																			
MO Bearings WS Bearings																			
MG Bearings High-temperature Hybrid Ceramic Bearings																			○
Full Complement Ceramic Bearings SK Bearings																		○	○
Corrosion-resistant SL Bearings Corrosion-resistant Hybrid Ceramic Bearings																			○
Ceramic Bearings Corrosion-resistant Ceramic Bearings																		○	○
Highly corrosion-resistant Ceramic Bearings Non-magnetic Hybrid Ceramic Bearings																		○	○

Note 1) The colored sections and circles indicate the characteristics of individual products.

2) The cleanliness class number represents the environments where the individual products are useful.

The cleanliness of the products themselves may vary depending on operating conditions (loads and rotational speed).

3) Please consult Koyo when planning to use a bearing under conditions close to the limit conditions specified in this table, or under the conditions that are outside the operating range indicated in this table.

INTERNATIONAL NETWORK

KOYO SEIKO CO., LTD. HEAD OFFICE

No.5-8, Minamisemba 3-chome, Chuo-ku, Osaka 542-8502, JAPAN
TEL : 81-6-6245-6087 FAX : 81-6-6244-0814

KOYO CANADA INC.

5324 South Service Road, Burlington, Ontario L7L 5H5, CANADA
TEL : 1-905-681-1121 FAX : 1-905-681-1392

* KOYO CORPORATION OF U.S.A.

29570 Clemens Road, P.O.Box 45028, Westlake, OH 44145, U.S.A.
TEL : 1-440-835-1000 FAX : 1-440-835-9347

* KOYO CORPORATION OF U.S.A. (AUTO SALES & TECHNICAL CENTER)

47771 Halyard Drive, Plymouth, MI 48170, U.S.A.
TEL : 1-734-454-1500 FAX : 1-734-454-4076

KOYO STEERING SYSTEMS OF U.S.A. INC.

47771 Halyard Drive, Plymouth, MI 48170, U.S.A.
TEL : 1-734-454-7067 FAX : 1-734-454-7059

KOYO DE MÉXICO, S.A.

Av. Primero de Mayo No.153, 53500 Naucalpan Edo. de México, MÉXICO
TEL : 52-55-5358-0214, 0077 FAX : 52-55-5576-8827, 8871

KOYO LATIN AMERICA, S.A.

P.O.Box 6-1797, El Dorado, Panama, REPUBLICA DE PANAMA
TEL : 507-264-0921, 0977 FAX : 507-264-2782, 269-7578

KOYO ROLAMENTOS DO BRASIL LTDA.

Rua Desembargador Eliseu Guilherme 304, 7-Andar, Paraiso
CEP 04004-30, BRASIL
TEL : 55-11-3887-9173 FAX : 55-11-3887-3039

THAI KOYO CO., LTD.

172 Moo 12 Tambol Bangwua, Amphur Bangpakong,
Chachoengsao 24180, THAILAND
TEL : 66-38-533-310-7 FAX : 66-38-532-776

KOYO SINGAPORE BEARING (PTE.) LTD.

38 Tuas West Road, Singapore 638385, SINGAPORE
TEL : 65-6274-2200 FAX : 65-6862-1623

PHILIPPINE KOYO BEARING CORPORATION

Rm.504, Comfoods Bldg., Cor. Gil Puyat Ave. and Pasong
Tamo, Makati City, PHILIPPINES
TEL : 63-2-817-8881, 8901 FAX : 63-2-867-3148

KOYO SEIKO CO., LTD. SEOUL BRANCH

Inwoo Building 6F, 539-11, Shinsa-Dong, Kangnam-Ku, Seoul, KOREA
TEL : 82-2-549-7922 FAX : 82-2-549-7923

KOYO SEIKO CO., LTD. BEIJING LIAISON OFFICE

Room.809, Jingtai Tower, 24 Jianguomenwai Street, Beijing, 100022, CHINA
TEL : 86-10-6515-0037 FAX : 86-10-6515-0522

KOYO SEIKO CO., LTD. SHANGHAI LIAISON OFFICE

Rm.402, Aetna Tower, 107 Zunyi Road, Shanghai 200051, CHINA
TEL : 86-21-6237-5280 FAX : 86-21-6237-5277

KOYO (SHANGHAI) COMPANY LIMITED

Room.913, Waigaoqiao Building, No.6 Jilong Road
Waigaoqiao F.T.Z. Shanghai, CHINA
TEL : 86-21-6237-5280 FAX : 86-21-6237-5277

** KOYO AUSTRALIA PTY. LTD.

Unit 7, 175-179 James Ruse Drive, Rosehill, 2142 N.S.W., AUSTRALIA
TEL : 61-2-9638-2355 FAX : 61-2-9638-3368

KOYO SEIKO CO., LTD. EUROPEAN CENTRAL OFFICE (SALES & TECHNICAL CENTER)

Markerkant 13-01, 1314 AL Almere, THE NETHERLANDS
TEL : 31-36-5383333 FAX : 31-36-5347212

KOYO STEERING EUROPE S.A.S. (SALES & TECHNICAL CENTER)

Zone Industrielle du Broteau, B.P.1, 69540 Irigny, FRANCE
TEL : 33-472-39-4444 FAX : 33-472-39-2188

** KOYO KULLAGER SCANDINAVIA A.B.

Kanalvägen 1B, 194 61 Upplands-Väsby, SWEDEN
TEL : 46-8-594-212-00 FAX : 46-8-594-212-29

KOYO (U.K.) LTD.

Whitehall Avenue, Kingston, Milton Keynes MK10 OAX,
UNITED KINGDOM
TEL : 44-1908-289300 FAX : 44-1908-289333

** EUROPA-KOYO B.V.

P.O.Box 1-2965 ZG, Nieuwpoort, THE NETHERLANDS
TEL : 31-184-606800 FAX : 31-184-602572/606857

KOYO ROMANIA REPRESENTATIVE OFFICE

Str. Frederic Jolliot-Curie, Nr.3, Etaj 1, Ap.2, Sector 5
Bucharest, RUMANIA
TEL : 40-21-410-4170, 4182, 0984 FAX : 40-21-410-1178

KOYO DEUTSCHLAND GMBH.

P.O.Box 73 06 60, D-22126 Hamburg, GERMANY
TEL : 49-40-67-9090-0 FAX : 49-40-67-9203-0

KOYO FRANCE S.A.

8 Rue Guy Moquet, B.P.189 Z.I., 95105 Argenteuil Cedex, FRANCE
TEL : 33-1-3998-4202 FAX : 33-1-3998-4244/4249

KOYO IBERICA, S.A

Avda. de la Industria, 52-2 izda 28820 Coslada Madrid, SPAIN
TEL : 34-91-329-0818 FAX : 34-91-747-1194

KOYO ITALIA S.R.L.

Via Bronzino 9, 20133 Milano, ITALY
TEL : 39-02-2951-0844 FAX : 39-02-2951-0954

(KOYO SEIKO CO., LTD. (Japan) is certified to ISO 9001 and QS-9000.)
*: QS-9000 certified. **: ISO 9001 certified.



ISO9001/QS-9000
Certificate No. 927265

EXSEV Bearing Series Product Guidebook

Value & Technology



KOYO SEIKO CO., LTD.



Hybrid Ceramic Bearing

CAT.NO. 457E
Printed in Japan '03.6-2CM