

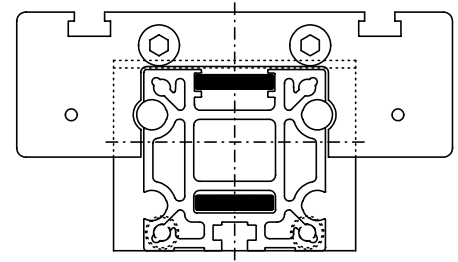


Positioning system MLZ 60, 80, 80S

Specifications

Belt drive

3.1

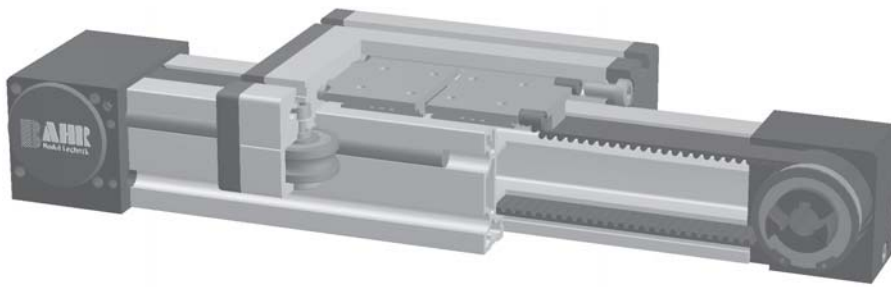

Function:

This linear unit consists of an aluminium square profile with integrated, hardened steel guide rods. The carriage which has internal linear ball bearings, that can be adjusted free of play is driven along the guide rods by a timing belt. The advantage of this system is that the belt is guided within the profile, ensuring that the belt is always tight and thus enabling the system to be operated e.g. when lying on its side. The pulleys have maintenance-free ball bearings. Belt tension can be readjusted by a simple screw adjustment device in the carriage. This device can also be used for symmetrical adjustment of two or more linear units running parallel.

Fitting position:

As required, max. length 6.000 mm without joints.

Carriage mounting:

By T-slots.

Unit mounting:

By T-slots or tapped holes in the bearing block, mounting sets.

Belt type:

HTD with steel reinforcement, no backlash when changing direction,

repeatability: ± 0,1 mm.

Forces and torques	Size	MLZ 60		MLZ 80		MLZ 80 S		MLZ 100	
	Forces/Torques	static	dynamic	static	dynamic	static	dynamic	static	dynamic
	F _x (N)	894	800	1900	1800	1900	1800		
	F _y (N)	3000	2000	3000	2000	4600	3600		
	F _z (N)	1700	1100	1700	1100	3000	1800		
	M _x (Nm)	67	43	90	55	170	140		
	M _y (Nm)	90	70	110	80	270	230		
	M _z (Nm)	120	100	150	120	300	220		
All forces and torques relate to the following:									
existing values $\frac{F_y}{F_{y_{dyn}}} + \frac{F_z}{F_{z_{dyn}}} + \frac{M_x}{M_{x_{dyn}}} + \frac{M_y}{M_{y_{dyn}}} + \frac{M_z}{M_{z_{dyn}}} \leq 1$									
No-load torque									
Nm		0,6		0,9		1,2			
Speed									
(m/sec) max		5		6		8			
Tensile force									
permanent (N)		900		1900		1900			
0,2 sec (N)		1000		2090		2090			
Geometrical moments of inertia of aluminium profile									
I _x mm ⁴		4,83x10 ⁵		x10 ⁵		x10 ⁵			
I _y mm ⁴		5,03x10 ⁵		x10 ⁵		x10 ⁵			
E-Modulus N/mm ²		70000		70000		70000			

For life-time calculation of rollers use our CD-ROM or homepage!

Formula: MLZ


Driving torque:

$$M_o = \frac{F * P * S}{2000 * \pi} + M_{leer}$$

$$P_o = \frac{M_o * n}{9550}$$

- F = force (N)
- P = pulley action perimeter (mm)
- S = safety factor 1,2 ... 2
- M_{leer} = no-load torque (Nm)
- n = rpm pulley (min⁻¹)
- M_o = driving torque (Nm)
- P_o = motor power (KW)



$$f = \frac{F * L^3}{E * I * 192}$$



- f = deflection (mm)
- F = load (N)
- L = free length (mm)
- E = elastic modulus 70000 (N/mm²)
- I = second moment of area (mm⁴)

Positioning system MLZ 60, 80, 80S

Dimensions (mm)

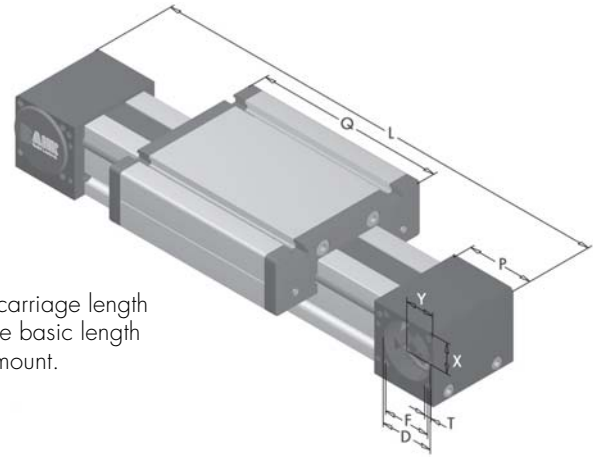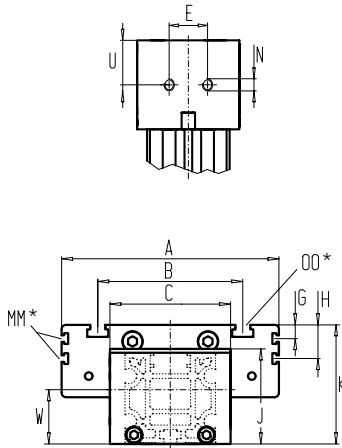

Increasing the carriage length will increase the basic length by the same amount.


3.1

*For slide-nuts refer to main catalogue chapter 2.2 page 2

Size	Basic length L	A	B	C	D	E	F	G	H	J	K	MM for	N	OO for	P	Q	T	U	W	X	Y	Basic weight	Weight per 100 mm
MLZ 60	290	144	96	80	47	30	42	-	-	63	79	-	M 8	M 8	59	168	M 6	29,5	36	27	26	4,7 kg	0,6 kg
MLZ 80	375	170	117	100	68	40	60	10	30	93	110	M 6	M 10	M 10	90	195	M 8	47,5	40	45	40	10,0 kg	1,0 kg
MLZ 80 S	395	190	126	100	68	40	60	12,5	30	93	111	M 6	M 10	M 8	90	215	M 8	47,5	40	45	40	11,0 kg	1,0 kg
MLZ 100																							

0 Choice of guide body profile:
(0) Standard **(1)** stainless guide rods **(2)** stainless guide rods and screws **(3)** stainless guide rods, rollers and screws

Choice of carriages:




For standard carriage length see 'Q' in table. Non-standard length on request. The longer the carriage, the greater the load capacity.



Top and bottom carriages are rigidly joined, enabling higher loads to be applied. This increases the basic length by 16 - 20 mm. Thickness of jointing plate refer to main catalogue chapter 1.2 page 6.

0 Coupling - shaft mounting:

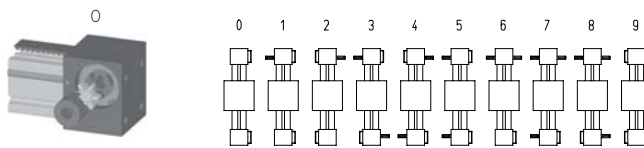

The standard version is supplied without shaft.

Version 9 is the same as 0, but with double sided coupling claw.

Belt table

Code No.	Size	Belt	mm/rev.	Number of teeth
0 4	60	5M25	130	26
0 7	80 (S)	8M30	192	24
0 9	100			

Shaft dimensions

Size	Shaft ø h6 x length	Key
60	14 x 35	5x5x28
80 (S)	18 x 45	6x6x40
100		

Basic length + stroke = total length

MLZ 60 1 0 0 0 0 4 1 01500

Pos. 1 2 3 4 5 6 7

Sample ordering code:
 MLZ 60 with standard body profile, standard carriage, coupling claw on one side, 1210 mm stroke.

